# TotalView

# Reference Guide

July 2004

Version 6.5

Copyright © 1998–2004 by Etnus LLC. All rights reserved.
Copyright © 1996–1998 by Dolphin Interconnect Solutions, Inc.
Copyright © 1993–1996 by BBN Systems and Technologies, a division of BBN Corporation.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise without the prior written permission of Etnus LLC. (Etnus).

Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013.

Etnus has prepared this manual for the exclusive use of its customers, personnel, and licensees. The information in this manual is subject to change without notice, and should not be construed as a commitment by Etnus. Etnus assumes no responsibility for any errors that appear in this document.

TotalView and Etnus are registered trademarks of Etnus LLC.

TotalView uses a modified version of the Microline widget library. Under the terms of its license, you are entitled to use these modifications. The source code is available at http://www.etnus.com/Products/TotalView/developers.

All other brand names are the trademarks of their respective holders.

# Book Overview

## part I - CLI Commands


1 CLI Command Summary ..... 3
2 CLI Commands ..... 13
3 CLI Namespace Commands ..... 117
4 TotalView Variables ..... 159
5 Creating Type Transformations ..... 191


## part II - Running TotalView


6 TotalView Command Syntax ..... 203
7 TotalView Debugger Server (tvdsvr) Command Syntax ..... 211


## part III - Platforms and Operating Systems


8 Compilers and Platforms ..... 219
9 Operating Systems ..... 229
10 Architectures ..... 239

# Contents

## About This Book

How To Use This Book ..... xi
Conventions ..... xi
TotalView Documentation ..... xii

## Part I - CLI Commands

### 1 CLI Command Summary

### 2 CLI Commands

Command Overview ..... 13
alias ..... 16
capture ..... 18
dactions ..... 19
dassign ..... 21
dattach ..... 23
dbarrier ..... 25
dbreak ..... 29
dcache ..... 32
dcheckpoint ..... 33
dcont ..... 36
ddelete ..... 37
ddetach ..... 38
ddisable ..... 39
ddlopen ..... 40
ddown ..... 43
denable ..... 44
dflush ..... 45
dfocus ..... 48
dga ..... 50
dgo ..... 52
dgroups ..... 53

dhalt ..... 58
dheap ..... 59
dhold ..... 60
dkill ..... 61
dlappend ..... 62
dlist ..... 63
dload ..... 66
dmstat ..... 67
dnext ..... 69
dnexti ..... 71
dout ..... 73
dprint ..... 75
dptsets ..... 79
drerun ..... 82
drestart ..... 84
drun ..... 86
dset ..... 88
dstatus ..... 90
dstep ..... 91
dstepi ..... 94
dunhold ..... 96
dunset ..... 97
duntil ..... 98
dup ..... 100
dwait ..... 101
dwatch ..... 102
dwhat ..... 105
dwhere ..... 108
dworker ..... 110
exit ..... 111
help ..... 112
quit ..... 113
stty ..... 114
unalias ..... 115

## 3 CLI Namespace Commands

Command Overview ..... 117
actionpoint ..... 119
dec2hex ..... 121
dll ..... 122
errorCodes ..... 123
expr ..... 124
focus_groups ..... 126
focus_processes ..... 127
focus_threads ..... 128
group ..... 129
hex2dec ..... 130
process ..... 131
read_symbols ..... 134
respond ..... 135
scope ..... 136

source_process_startup ..... 138
symbol ..... 139
thread ..... 151
type ..... 153
type_transformation ..... 155

## 4 TotalView Variables

Top-Level (::) Namespace ..... 159
TV:: Namespace ..... 164
TV::GUI:: Namespace ..... 185

## 5 Creating Type Transformations

Why Type Transformations ..... 191
Creating Structure and Class Transformations ..... 192
Transforming Structures ..... 193
build_struct_transform Function ..... 194
Type Transformation Expressions ..... 195
Using Type Transformations ..... 198

# Part II - Running TotalView

## 6 TotalView Command Syntax

Syntax ..... 203
Options ..... 203

## 7 TotalView Debugger Server (tvdsvr) Command Syntax

The tvdsvr Command and Its Options ..... 211
Replacement Characters ..... 214

# Part III - Platforms and Operating Systems

## 8 Compilers and Platforms

Compiling with Debugging Symbols ..... 219
HP Alpha Running Linux ..... 219
HP Tru64 UNIX ..... 220
HP-UX ..... 220
IBM AIX on RS/6000 Systems ..... 220
Linux Running on an x86 Platform ..... 221
Linux Running on an Itanium Platform ..... 222
SGI IRIX-MIPS Systems ..... 222
SunOS 5 on SPARC ..... 223
Using Exception Data on Tru64 UNIX ..... 223
Linking with the dbfork Library ..... 224
Linking with dbfork and HP Tru64 UNIX ..... 224
Linking with HP-UX ..... 224
dbfork on IBM AIX on RS/6000 Systems ..... 225
Linking C++ Programs with dbfork ..... 225

Linux ..... 226
SGI IRIX6-MIPS ..... 226
SunOS 5 SPARC ..... 226

## 9 Operating Systems

Supported Operating Systems ..... 229
Mounting the /proc File System ..... 230
Mounting /proc HP Tru64 UNIX and SunOS 5 ..... 230
Mounting proc SGI IRIX ..... 230
Swap Space ..... 231
Swap Space on HP Tru64 UNIX ..... 231
Swap Space on HP HP-UX ..... 231
Maximum Data Size ..... 231
Swap Space on IBM AIX ..... 232
Swap Space on Linux ..... 232
Swap Space on SGI IRIX ..... 232
Swap Space on SunOS 5 ..... 233
Shared Libraries ..... 233
Changing Linkage Table Entries and LD_BIND_NOW ..... 234
Using Shared Libraries on HP-UX ..... 235
Debugging Dynamically Loaded Libraries ..... 235
Known Limitations ..... 237
Remapping Keys ..... 237
Expression System ..... 237
Expression System on HP Alpha Tru64 UNIX ..... 237
Expression System on IBM AIX ..... 238
Expression System on SGI IRIX ..... 238

## 10 Architectures

AMD x86-64 ..... 239
AMD x86-64 General Registers ..... 240
AMD x86-64 Floating-Point Registers ..... 240
AMD x86-64 FPCR Register ..... 241
Using the AMD x86-64 FPCR Register ..... 242
AMD x86-64 FPSR Register ..... 242
AMD x86-64 MXSCR Register ..... 242
HP Alpha ..... 243
Alpha General Registers ..... 243
Alpha Floating-Point Registers ..... 244
Alpha FPCR Register ..... 244
HP PA-RISC ..... 245
PA-RISC General Registers ..... 245
PA-RISC Process Status Word ..... 245
PA-RISC Floating-Point Registers ..... 246
PA-RISC Floating-Point Format ..... 247
IBM Power ..... 247
Power General Registers ..... 247
Power MSR Register ..... 248
Power Floating-Point Registers ..... 249
Power FPSCR Register ..... 249
Using the Power FPSCR Register ..... 250

Intel IA-64 ..... 251
Intel IA-64 General Registers ..... 251
IA-64 Processor Status Register Fields (PSR) ..... 252
Current Frame Marker Register Fields (CFM) ..... 253
Register Stack Configuration Register Fields (RSC) ..... 253
Previous Function State Register Fields (PFS) ..... 253
Floating Point Registers ..... 253
Floating Point Status Register Fields ..... 254
Intel x86 ..... 254
Intel x86 General Registers ..... 255
Intel x86 Floating-Point Registers ..... 255
Intel x86 FPCR Register ..... 256
Using the Intel x86 FPCR Register ..... 257
Intel x86 FPSR Register ..... 257
Intel x86 MXSCR Register ..... 257
SGI MIPS ..... 258
MIPS General Registers ..... 258
MIPS SR Register ..... 259
MIPS Floating-Point Registers ..... 260
MIPS FCSR Register ..... 260
Using the MIPS FCSR Register ..... 261
MIPS Delay Slot Instructions ..... 261
Sun SPARC ..... 262
SPARC General Registers ..... 262
SPARC PSR Register ..... 263
SPARC Floating-Point Registers ..... 263
SPARC FPSR Register ..... 264
Using the SPARC FPSR Register ..... 264

**Index** ..... 267

# About This Book

This document is the reference guide for the Etnus TotalView® debugger. Unlike the *TotalView Users Guide* which presented GUI and CLI information together, the chapters in this book are either devoted to one interface or contain information that pertains to both.

## How To Use This Book

The information in this book is in three parts.

- **CLI Commands**

  This part contains descriptions of all the CLI commands, the variables that you can set using the CLI, and other CLI-related information.
- **Running TotalView**

  TotalView and the TotalView Debugger Server (**tvdsvr**) can accept many command-line options. This part describes these options.
- **Platforms and Operating Systems**

  Although the way in which you use TotalView is the same from system-to-system and from environment-to-environment, these systems and environments place some constraints on what you must do, and require that you compile programs differently on the various UNIX platforms. This part describes these differences.

## Conventions

The following table describes the conventions used in this book:

| Convention | Meaning |
|---|---|
| [ ] | Brackets are used when describing parts of a command that are optional. |
| *arguments* | In a command description, text in italics represents information you type. Elsewhere, italics is used for emphasis. |

| Convention | Meaning |
|---|---|
| Dark text | In a command description, **dark text** represents keywords or options that you must type exactly as displayed. Elsewhere, it represents words that are used in a programmatic way rather than their normal way. |
| `Example text` | In program listings, this indicates that you are seeing a program or something you'd type in response to a shell or CLI prompt. If this text is in bold, it's indicating that what you're seeing is what you'll be typing. If you're viewing this information online, example text is in color. |
| | This graphic symbol indicates that the information that follows—*which is printed in italics*—is a note. This information is an important qualifier to what you just read. |
| GUI | This graphic symbol indicates that a feature is only available in the GUI. If you see it on the first line of a section, all the information in the section is just for GUI users. When it is next to a paragraph, just that sentence or paragraph applies to the GUI. |
| CLI: | The primary emphasis of this book is the GUI. It shows the windows and dialog boxes that you use. This symbol tells you the CLI command you use to do the same thing. |

# TotalView Documentation

The following table describes other TotalView documentation:

| Title | Contents | Online Help | HTML | PDF | Print |
|---|---|---|---|---|---|
| TotalView Users Guide | Describes how to use the TotalView GUI and the CLI; this is the most used of all the TotalView books. | ✔ | ✔ | ✔ | ✔ |
| TotalView New Features | Describes new features added to TotalView. | ✔ | ✔ | ✔ | |
| Debugging Memory Using TotalView | Is a combined user and reference guide describing how to find your program's memory problems. | ✔ | ✔ | ✔ | ✔ |
| TotalView Reference Guide | Contains descriptions of CLI commands, how you run TotalView, and platform-specific information. | ✔ | ✔ | ✔ | ✔ |
| TotalView QuickView | Presents what you need to know to get started using TotalView. | | ✔ | | ✔ |
| TotalView Commands | Defines all TotalView GUI commands—this is the online Help. | ✔ | ✔ | ✔ | |
| TotalView Installation Guide | Contains the procedures to install TotalView and the FLEX*lm* license manager. | ✔ | ✔ | ✔ | |
| TotalView Release Notes | Lists known bugs and other information related to the current release. | | ✔ | ✔ | |
| Platforms and System Requirements | Lists the platforms upon which TotalView runs and the compilers it supports. | ✔ | ✔ | ✔ | |

## Contacting Us

Please contact us if you have problems installing TotalView, questions that are not answered in the product documentation or on our Web site, or suggestions for new features or improvements.

Our Internet email address for support issues is:

support@etnus.com

For documentation issues, the address is:

documentation@etnus.com

Our phone numbers are:

1-800-856-3766 in the United States
(+1) 508-652-7700 worldwide

If you are reporting a problem, please include the following information:

- The *version* of TotalView and the *platform* on which you are running TotalView.
- An *example* that illustrates the problem.
- A *record* of the sequence of events that led to the problem.

# Part I: CLI Commands

This part of the *TotalView Reference Guide* contains five chapters that describe the TotalView Command Line Interpreter (CLI).

Chapter 1: CLI Command Summary
: This chapter summarizes all the CLI commands.

Chapter 2: CLI Commands
: This chapter contains detailed descriptions of the CLI commands that are found in the CLI's unqualified (top-level) namespace. These are the commands that you use day-in and day-out, and those that are most often used interactively.

Chapter 3: CLI Namespace Commands
: This chapter contains descriptions of commands found in the TV:: namespace. These commands are seldom used interactively, as they are most often used in scripts.

Chapter 4: TotalView Variables
: This chapter describes all TotalView variables, including those that you use to set GUI behaviors. These variables reside in three namespaces: unqualified (top-level), TV:: and TV::GUI. For the most part, you set these variables to alter TotalView behaviors.

Chapter 5: Creating Type Transformations
: If you do not wish to see all the members of a class or structure or if you would like to alter the way TotalView displays these elements, you can call a CLI routine that tells TotalView how you want it to display information. This chapter tells how to create these CLI routines.

# CLI Command Summary

1

This chapter contains a summary of all TotalView® CLI commands. The commands are described in Chapter 2, "CLI *Commands*," on page 13 and Chapter 3, "CLI N*amespace Commands*," on page 117.

### actionpoint

Gets and sets action point properties

TV::actionpoint *action* [ *object-id* ] [ *other-args* ]

### alias

Creates a new user-defined pseudonym for a command

alias *alias-name defn-body*

Views previously defined aliases

alias [ *alias-name* ]

### capture

Returns a command's output as a string

capture [ –out | –err | –both ] [ –f *filename* ] *command*

### dactions

Displays information about action points

dactions [ *ap-id-list* ] [ –at *source-loc* ]
[ –enabled | –disabled ]

Saves action points to a file

dactions –save [ *filename* ]

Loads previously saved action points

dactions –load [ *filename* ]

### dassign

Changes the value of a scalar variable

dassign *target value*

### dattach

Brings currently executing processes under CLI control

dattach [ –g *gid* ] [ –r *hname* ]
[ –ask_attach_parallel | –no_attach_parallel ]
[ –c *corefile-name* ]
[ –e ] *fname pid-list*

### dbarrier

Creates a barrier breakpoint at a source location

dbarrier *source-loc* [ –stop_when hit { group | process | none } ]
[ –stop_when_done { group | process | none } ]

Creates a barrier breakpoint at an address

dbarrier –address *addr*
[ –stop_when_hit { group | process | none } ]
[ –stop_when_done { group | process | none } ]

### dbreak

Creates a breakpoint at a source location

dbreak *source-loc* [ –p | –g | –t ] [ [ –l *lang* ] –e *expr* ]

Creates a breakpoint at an address

dbreak –address *addr* [ –p | –g | –t] [ [ –l *lang* ] –e *expr* ]

### dcache

Clears the remote library cache

dcache

### dcheckpoint

Creates a checkpoint on SGI IRIX

dcheckpoint [ *after_checkpointing* ] [ –by *process_set* ] [ –no_park ]
[ –ask_attach_parallel | –no_attach_parallel ]
[ –no_preserve_ids ] [ –force ] *checkpoint-name*

Creates a checkpoint on IBM AIX

dcheckpoint [ –delete | –halt ]

### dcont

Continues execution and waits for execution to stop

dcont

### ddelete

Deletes some action points

ddelete *action-point-list*

Deletes all action points

ddelete –a

### ddetach

Detaches from the processes

ddetach

## ddisable

Disables some action points

**ddisable** *action-point-list*

Disables all action points

**ddisable –a**

## ddlopen

Loads a shared object library

**ddlopen** [ **–now** | **–lazy** ] [ **–local** | **–global** ] [ **–mode** *int* ] *filespec*

Displays information about shared object libraries

**ddlopen** [ **–list** *dll-ids*... ]

## ddown

Moves down the call stack

**ddown** [ *num-levels* ]

## dec2hex

Converts a decimal number into hexadecimal

**TV::dec2hex** *number*

## denable

Enables some action points

**denable** *action-point-list*

Enables all disabled action points in the current focus

**denable –a**

## dflush

Removes the top-most suspended expression evaluation

**dflush**

Removes all suspended **dprint** computations

**dflush –all**

Removes **dprint** computations preceding and including a suspended evaluation ID

**dflush** *susp-eval-id*

## dfocus

Changes the target of future CLI commands to this P/T set

**dfocus** *p/t-set*

Executes a command in this P/T set

**dfocus** *p/t-set command*

## dga

Displays global array variables

**dga** [**–lang** *lang_type*] [*handle_or_name*] [*slice*]

## dgo

Resumes execution of target processes

**dgo**

## dgroups

Adds members to thread and process groups

**dgroups –add** [ **–g** *gid* ] [ *id-list* ]

Deletes groups

**dgroups –delete** [ **–g** *gid* ]

Intersects a group with a list of processes and threads

**dgroups –intersect** [ **–g** *gid* ] [ *id-list* ]

Prints process and thread group information

**dgroups** [ **–list** ] [ *pattern* ]

Creates a new thread or process group

**dgroups –new** [ *thread_or_process* ] [ **–g** *gid* ] [ *id-list* ]

Removes members from thread or process groups

**dgroups –remove** [ **–g** *gid* ] [ *id-list* ]

## dhalt

Suspends execution of processes

**dhalt**

## dheap

Shows Memory Debugger state

**dheap** [ **–status** ]

Shows information about a backtrace

**dheap –backtrace** [ *subcommands* ]

Enables or disables the Memory Debugger

**dheap** { **–enable** | **–disable** }

Enables and disables the retaining (hoarding) of freed memory blocks

**dheap –hoard** [ *subcommands* ]

Displays Memory Debugger information

**dheap –info** [ **–backtrace** ] [ *start_address* [ *end_address* ] ]

Indicates whether an address is within a deallocated block

**dheap –is_dangling** *address*

Locates memory leaks

**dheap –leaks** [ **–check_interior** ]

Enables or disables Memory Debugger event notification

**dheap –[no]notify**

Paints memory with a distinct pattern

**dheap –paint** [ *subcommands* ]

Enables and disables allocation and reallocation notification

**dheap –tag_alloc** *subcommand start_address* [ *end_address*]

Displays the Memory Debugger's version number

**dheap –version**

### dhold

Holds processes

dhold –process

Holds threads

dhold –thread

### dkill

Terminates execution of target processes

dkill

### dlappend

Appends list elements to a TotalView variable

dlappend *variable-name value* [ ... ]

### dlist

Displays code relative to the current list location

dlist [ –n *num-lines* ]

Displays code relative to a named location

dlist *source-loc* [ –n *num-lines* ]

Displays code relative to the current execution location

dlist –e [ –n *num-lines* ]

### dll

Manages shared libraries

TV::dll *action* [ *dll-id-list* ] [ *other-args* ]

### dload

Loads debugging information

dload [ –g *gid* ] [ –r *hname*] [ –e ] *executable*

### dmstat

Displays memory use information

dmstat

### dnext

Steps source lines, stepping over subroutines

dnext [ *num-steps* ]

### dnexti

Steps machine instructions, stepping over subroutines

dnexti [ *num-steps* ]

### dout

Executes until just after the place that called the current routine

dout [ *frame-count* ]

### dprint

Prints the value of a variable or expression

dprint *variable_or_expression*

### dptsets

Shows the status of processes and threads in an array of P/T expressions

dptsets [ *ptset_array* ] ...

## drerun

Restarts processes

```
drerun [ cmd_arguments ] [ < infile ]
        [ > [ > ][ & ] outfile ]
        [ 2> [ > ] errfile ]
```

## drestart

Restarts a checkpoint on AIX

```
drestart [ –halt ] [ –g gid ] [ –r host ] [ –no_same_hosts ]
```

Restarts a checkpoint on SGI

```
drestart [ process-state ] [ –no_unpark ] [ –g gid ] [ –r host ]
        [ –ask_attach_parallel | –no_attach_parallel ]
        [ –no_preserve_ids ] checkpoint-name
```

## drun

Starts or restarts processes

```
drun [ cmd_arguments ] [ < infile ]
        [ > [ > ][ & ] outfile ]
        [ 2> [ > ] errfile ]
```

## dset

Creates or changes a CLI state variable

```
dset [ –new ] debugger-var value
```

Views current CLI state variables

```
dset [ debugger-var ]
```

Sets the default for a CLI state variable

```
dset -set_as_default debugger-var value
```

## dstatus

Shows current status of processes and threads

```
dstatus
```

## dstep

Steps lines, stepping into subfunctions

```
dstep [ num-steps ]
```

## dstepi

Steps machine instructions, stepping into subfunctions

```
dstepi [ num-steps ]
```

## dunhold

Releases a process

```
dunhold –process
```

Releases a thread

```
dunhold –thread
```

## dunset

Restores a CLI variable to its default value

```
dunset debugger-var
```

Restores all CLI variables to their default values

```
dunset –all
```

### duntil

Runs to a line

duntil *line-number*

Runs to an address

duntil –address *addr*

Runs into a function

duntil *proc-name*

### dup

Moves up the call stack

dup [ *num-levels* ]

### dwait

Blocks command input until the target processes stop

dwait

### dwatch

Defines a watchpoint for a variable

dwatch *variable* [ –length *byte-count* ] [ –p | –g | –t ]
[ [ –l *lang* ] –e *expr* ] [ –t *type* ]

Defines a watchpoint for an address

dwatch –address *addr* –length *byte-count* [ –p | –g | –t ]
[ [ –l *lang* ] –e *expr* ] [ –t *type* ]

### dwhat

Determines what a name refers to

dwhat *symbol-name*

### dwhere

Displays locations in the call stack

dwhere [ *num-levels* ] [ –a ]

### dworker

Adds or removes a thread from a workers group

dworker { *number* | *boolean* }

### errorCodes

Returns a list of all error code tags

TV::errorCodes

Returns or raises error information

TV::errorCodes *number_or_tag* [ –raise [ *message* ] ]

### exit

Terminates the debugging session

exit [ –force ]

### expr

Manipulates values created by dprint –nowait

TV::expr action [ *susp-eval-id* ] [ *other-args* ]

### focus_groups
Returns a list of groups in the current focus

TV::focus_groups

### focus_processes
Returns a list of processes in the current focus

TV::focus_processes [ –all | –group | –process | –thread ]

### focus_threads
Returns a list of threads in the current focus

TV::focus_threads [ –all | –group | –process | –thread ]

### group
Gets and sets group properties

TV::group *action* [ *object-id* ] [ *other-args* ]

### help
Displays help information

help [ *topic* ]

### hex2dec
Converts to decimal

TV::hex2dec *number*

### process
Gets and sets process properties

TV::process *action* [ *object-id* ] [ *other-args* ]

### quit
Terminates the debugging session

quit [ –force ]

### read_symbols
Reads symbols from libraries

TV::read_symbols –lib *lib-name-list*

Reads symbols from libraries associated with a stack frame

TV::read_symbols –frame [*number*]

Reads symbols for all stacks in the backtrace

TV::read_symbols –stack

### respond
Provides responses to commands

TV::respond *response command*

### scope
Sets and gets internal scope properties

TV::scope *action* [ *object-id* ] [ *other-args* ]

### source_process_startup
"Sources" a .tvd file when a process is loaded

TV::source_proccess_startup *process_id*

### stty

Sets terminal properties

stty [ *stty-args* ]

### symbol

Returns or sets internal TotalView symbol information

TV::symbol *action* [ *object-id* ] [ *other-args* ]

### thread

Gets and sets thread properties

TV::thread *action* [ *object-id* ] [ *other-args* ]

### type

Gets and sets type properties

TV::type *action* [ *object-id* ] [ *other-args* ]

### type_transformation

Creates type transformations and examines properties

TV::type_transformation *action* [ *object-id* ] [ *other-args* ]

### unalias

Removes an alias

unalias *alias-name*

Removes all aliases

unalias –all

# CLI Commands 2

This chapter contains detailed descriptions of CLI commands.

## Command Overview

This section lists all of the CLI commands. It also contains a short explanation of what each command does.

### General CLI Commands

The CLI commands in this group provide information on the general CLI operating environment:

- **alias**: Creates or views pseudonym for commands and arguments.
- **capture**: Allows commands that print information to instead send their output to a variable.
- **dlappend**: Appends list elements to a TotalView variable.
- **dset**: Changes or views values of TotalView variables.
- **dunset**: Restores default settings of TotalView variables.
- **help**: Displays help information.
- **stty**: Sets terminal properties.
- **unalias**: Removes a previously defined alias.

### CLI Initialization and Termination Commands

These commands initialize and terminate the CLI session, and add processes to CLI control:

- **dattach**: Brings one or more processes currently executing in the normal runtime environment (that is, outside TotalView) under TotalView control.
- **ddetach:** Detaches TotalView from a process.
- **ddlopen**: Dynamically loads shared object libraries.
- **dgroups**: Manipulates and manages groups.
- **dkill:** Kills existing user processes, leaving debugging information in place.

- **dload:** Loads debugging information about the program into TotalView and prepares it for execution.
- **drerun:** Restarts a process.
- **drun:** Starts or restarts the execution of user processes under control of the CLI.
- **exit, quit:** Exits from TotalView, ending the debugging session.

## Program Information Commands

The following commands provide information about a program's current execution location, and allow you to browse the program's source files:

- **ddown:** Navigates through the call stack by manipulating the current frame.
- **dflush**: Unwinds the stack from computations.
- **dga**: Displays global array variables.
- **dlist**: Browses source code relative to a particular file, procedure, or line.
- **dmstat**: Displays memory usage information.
- **dprint:** Evaluates an expression or program variable and displays the resulting value.
- **dptsets**: Shows the status of processes and threads in a P/T set.
- **dstatus:** Shows the status of processes and threads.
- **dup:** Navigates through the call stack by manipulating the current frame.
- **dwhat:** Determines what a name refers to.
- **dwhere:** Prints information about the thread's stack.

## Execution Control Commands

The following commands control execution:

- **dcont:** Continues execution of processes and waits for them.
- **dfocus:** Changes the set of processes, threads, or groups upon which a CLI command acts.
- **dgo:** Resumes execution of processes (without blocking).
- **dhalt:** Suspends execution of processes.
- **dhold**: Holds threads or processes.
- **dnext:** Executes statements, stepping over subfunctions.
- **dnexti:** Executes machine instructions, stepping over subfunctions.
- **dout**: Runs out of current procedure.
- **dstep:** Executes statements, moving into subfunctions if required.
- **dstepi:** Executes machine instructions, moving into subfunctions if required.
- **dunhold:** Releases held threads.
- **duntil:** Executes statements until a statement is reached.
- **dwait:** Blocks command input until processes stop.
- **dworker:** Adds or removes threads from a workers group.

## Action Points

The following action point commands define and manipulate the points at which the flow of program execution should stop so that you can examine debugger or program state:

- **dactions**: Views information on action point definitions and their current status; this command also saves and restores action points.
- **dbarrier**: Defines a process barrier breakpoint.
- **dbreak:** Defines a breakpoint.
- **ddelete**: Deletes an action point.
- **ddisable**: Temporarily disables an action point.
- **denable**: Re-enables an action point that has been disabled.
- **dwatch:** Defines a watchpoint.

## Other Commands

The commands in this category do not fit into any of the other categories:

- **dassign:** Changes the value of a scalar variable.
- **dcache**: Clears the remote library cache.
- **dcheckpoint**: Creates a file that can later be used to restart a program.
- **dheap**: Displays information about the heap.
- **drestart**: Restarts a checkpoint.

## alias

Creates or views pseudonyms for commands

*Format*: Creates a new user-defined pseudonym for a command

**alias** *alias-name defn-body*

Views previously defined aliases

**alias** [ *alias-name* ]

*Arguments*:

| | |
|---|---|
| *alias-name* | The name of the command pseudonym being defined. |
| *defn-body* | The text that Tcl substitutes when it encounters *alias-name*. |

*Description*: The **alias** command associates a name you specify with text that you define. This text can contain one or more commands. After you create an alias, you can use it in the same way as a native TotalView or Tcl command. In addition, you can include an alias as part of a definition of another alias.

If you do not enter an *alias-name* argument, the CLI displays the names and definitions of all aliases. If you only specify an *alias-name* argument, the CLI displays the definition of the alias.

Because the **alias** command can contain Tcl commands, you must ensure that *defn-body* complies with all Tcl expansion, substitution, and quoting rules.

The TotalView global startup file, **tvdinit.tvd**, defines a set of default aliases. All the common commands have one- or two-letter aliases. (You can obtain a list of these commands by typing **alias**—being sure not to use an argument—in the CLI window.)

You cannot use an alias to redefine the name of a CLI-defined command. You can, however, redefine a built-in CLI command by creating your own Tcl procedure. For example, the following procedure disables the built-in **dwatch** command. When a user types **dwatch**, the CLI executes this code instead of the built-in CLI code.

```
proc dwatch {} {
   puts “The dwatch command is disabled”
}
```

The CLI does not parse *defn-body* (the command’s definition) until it is used. Therefore, you can create aliases that are nonsensical or incorrect. The CLI only detects errors when it tries to execute your alias.

When you obtain help for a command, the help text includes information for TotalView predefined aliases.

*Examples*:

| | |
|---|---|
| `alias nt dnext` | Defines a command called **nt** that executes the **dnext** command. |
| `alias nt` | Displays the definition of the **nt** alias. |
| `alias` | Displays the definitions of all aliases. |

`alias m {dlist main}`

Defines an alias called **m** that lists the source code of function **main()**.

`alias step2 {dstep; dstep}`

Defines an alias called **step2** that does two **dstep** commands. This new command applies to the focus that exists when someone uses this alias.

`alias step2 {s ; s}`

Creates an alias that performs the same operations as the one in the previous example. It differs in that it uses the alias for **dstep**. You could also create the following alias which does the same thing:
**alias step2 {s 2}**.

`alias step1 {f p1. dstep}`

Defines an alias called **step1** that steps the first user thread in process 1. All other threads in the process run freely while TotalView steps the current line in your program.

## capture

Returns a command's output as a string

*Format*: **capture** [ **–out** | **–err** | **–both** ] [ **–f** *filename* ] *command*

*Arguments*:

| | |
|---|---|
| **–out** | Tells the CLI to only capture output that is sent to **stdout**. This option is the default. |
| **–err** | Tells the CLI to send the output it captures to **stderr**. |
| **–both** | Tells the CLI to send the output it captures to **stdout** and **stderr**. |
| **–f** *filename* | Tells the CLI to send the output it captures to *filename*. |
| *command* | The CLI command (or commands) whose output is being captured. If you are specifying more than one command, you must enclose them within braces (**{ }**). |

*Description*: The **capture** command executes *command*, capturing all output that would normally go to the console into a string. After *command* completes, it returns the string. This command is analogous to the UNIX shell's back-tick feature (`*command*`). The **capture** command lets you obtain the printed output of any CLI command so that you can assign it to a variable or otherwise manipulate it.

*Examples*:

```
set save_stat [ capture st ]
```

Saves the current process status to a Tcl variable.

```
set vbl [ capture {foreach i {1 2 3 4} \
            {p int2_array($i )}} ]
```

Saves the printed output of four array elements into a Tcl variable. Here is sample output:

```
int2_array(1) = -8 (0xfff8)
int2_array(2) = -6 (0xfffa)
int2_array(3) = -4 (0xfffc)
int2_array(4) = -2 (0xfffe)
```

Because the **capture** command records all of the information sent to it by the commands in the **foreach** loop, you do not have to use a **dlist** command.

```
exec cat << [ capture help commands ] > cli_help.txt
```

Writes the help text for all TotalView commands to the **cli_help.txt** file.

```
set ofile [open cli_help.txt w]
capture -f $ofile help commands
close $ofile
```

Also writes the help text for all TotalView commands to the **cli_help.txt** file. This set of commands is more efficient than the previous command because the captured data is not buffered.

## dactions

Displays information, and saves and reloads action points

*Format:* Displays information about action points

**dactions** [ *ap-id-list* ] [ **–at** *source-loc* ] [ **–enabled** | **–disabled** ]

Saves action points to a file.

**dactions –save** [ *filename* ]

Loads previously saved action points

**dactions –load** [ *filename* ]

*Arguments:*

| | |
|---|---|
| *ap-id-list* | A list of action point identifiers. If you specify individual action points, the information that appears is limited to these points.<br>If you omit this argument, TotalView displays summary information about all action points in the processes in the focus set. If you enter one ID, TotalView displays full information for it. If you enter more than one ID, TotalView just displays summary information for each. |
| **–at** *source-loc* | Displays the action points at *source-loc*. |
| **–enabled** | Shows only enabled action points. |
| **–disabled** | Shows only disabled action points. |
| **–save** | Writes information about action points to a file. |
| **–load** | Restores action point information previously saved in a file. |
| *filename* | The name of the file into which TotalView reads and writes action point information. If you omit this file name, TotalView writes action point information to a file named *program_name*.**TVD.v3breakpoints**, where *program_name* is the name of your program. |

*Description:* The **dactions** command displays information about action points in the processes in the current focus. If you do not indicate a focus, the default focus is at the process level. The information is printed; it is not returned.

This command also lets you obtain the action point identifier. You will need to use this identifier when you delete, enable, and disable action points.

*The identifier is returned when TotalView creates the action point. The* CLI *prints this* ID *when the thread stops at an action point.*

You can include action point identifiers as arguments to the command when more detailed information is needed. The **–enabled** and **–disabled** options restrict output to action points in one of these states.

You cannot use the **dactions** command when you are debugging a core file or before TotalView loads executables.

The **–save** option tells TotalView to write action point information to a file so that either you or TotalView can restore your action points later. The **–load** option tells TotalView to immediately read the saved file. If you use

the *filename* argument with either of these options, TotalView either writes to or reads from this file. If you do not use this argument, TotalView uses a file named *program_name*.TVD.v3breakpoints where *program_name* is the name of your program. TotalView writes this file into the directory in which your program resides.

The information saved includes expression information associated with the action point and whether the action point is enabled or disabled. For example, if your program's name is **foo**, TotalView writes this information to **foo.TVD.v3breakpoints**.

*TotalView does not save information about watchpoints.*

If a file with the default name exists, TotalView can read this information when it starts your program. When TotalView exits, it can create the default. For more information, see the **File** > **Preference** Action Points Page information in the online Help.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| ac | dactions | Displays all action points |

*Examples:*

`ac -at 81`

Displays information about the action points on line 81. (This example uses the alias instead of the full command name.) Here is the output from this command:

```
ac –at 81
1 shared action point for group 3:
   1 addr=0x10001544 [arrays.F#81] Enabled
      Share in group: true
      Stop when hit: group
```

`dactions 1 3`

Displays information about action points 1 and 3, as follows:

```
2 shared action points for process 1:
   1 addr=0x100012a8 [arrays.F#56] Enabled
   3 addr=0x100012c0 [arrays.F#57] Enabled
```

`dfocus p1 dactions`

Displays information about all action points defined in process 1.

`dfocus p1 dactions -enabled`

Displays information about all enabled action points in process 1.

## dassign

Changes the value of a scalar variable

*Format*: **dassign** *target value*

*Arguments*:

| | |
|---|---|
| *target* | The name of a scalar variable in your program. |
| *value* | A source-language expression that evaluates to a scalar value. This expression can use the name of another variable. |

*Description*: The **dassign** command evaluates an expression and replaces the value of a variable with the evaluated result. The location can be a scalar variable, a dereferenced pointer variable, or an element in an array or structure.

The default focus for the **dassign** command is *thread*. If you do not change the focus, this command acts upon the *thread of interest*. If the current focus specifies a width that is wider than **t** (thread) and is not **d** (default), **dassign** iterates over the threads in the focus set and performs the assignment in each. In addition, if you use a list with the **dfocus** command, the **dassign** command iterates over each list member.

The CLI interprets each symbol name in the expression according to the current context. Because the value of a source variable might not have the same value across threads and processes, the value assigned can differ in your threads and processes. If the data type of the resulting value is incompatible with that of the target location, you must cast the value into the target's type. (*Casting* is described in Chapter 12 of the *TotalView Users Guide*.)

You need to know the following about assigning characters and strings:

- If you are assigning a character to a *target*, place the character value within single-quotation marks; for example, **'c'**.
- You can use the standard C language escape character sequences; for example, **\n and \t**. These escape sequences can also be in a character or string assignment.
- If you are assigning a string to a *target*, place the string within quotation marks. However, you must escape the quotation marks so they are not interpreted by Tcl; for example, **\"The quick brown fox\"**.

If *value* contains an expression, the TotalView expression system evaluates the expression

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| as | dassign | Changes a scalar variable's value |

*Examples*:

`dassign scalar_y 102`
Stores the value 102 in each occurrence of variable **scalar_y** for all processes and threads in the current set.

`dassign i 10*10`
Stores the value 100 in variable **i**.

`dassign i i*i`
: Does not work and the CLI displays an error message. If **i** is a simple scalar variable, you can use the following statements:

```
set x [lindex [capture dprint i] 2]
dassign i [expr $x * $x]
```

`f {p1 p2 p3} as scalar_y 102`
: Stores the value 102 in each occurrence of variable **scalar_y** contained in processes 1, 2, and 3.

## dattach

Brings currently executing processes under CLI control

*Format:* dattach [ –g *gid* ] [ –r *hname* ]
[ –ask_attach_parallel | –no_attach_parallel ]
[ –c *corefile-name* ]
[ –e ] *filename pid-list*

*Arguments:*

–g *gid*
: Sets the control group for the processes being added to group *gid*. This group must already exist. (The CLI **GROUPS** variable contains a list of all groups. See **GROUPS** on page 161 for more information.)

–r *hname*
: The host on which the process is running. The CLI launches a TotalView Debugger Server on the host machine if one is not already running there. See the *Setting Up Parallel Debugging Sessions* chapter of the *TotalView Users Guide* for information on the launch command used to start this server.

Setting a host sets it for all PIDs attached to in this command. If you do not name a host machine, the CLI uses the local host.

–ask_attach_parallel
: Asks whether TotalView should attach to parallel processes of a parallel job. The default is to automatically attach to processes. For additional information, see the Dynamic Libraries Page in the **File** > **Preferences** Dialog Box in the online Help.

–no_attach_parallel
: Do not attach to any additional parallel processes in a parallel job. For additional information, see the Dynamic Libraries Page in the **File** > **Preferences** Dialog Box in the online Help.

-c *corefile-name*
: Tells the CLI that it should load the core file named in the argument that follows. If you use this option, you must also special a file name (*filename*).

–e
: Tells the CLI that the next argument is a file name. You need to use this argument if the file name begins with a dash (–) or only uses numeric characters.

*filename*
: The name of the executable. Setting an executable here sets it for all PIDs being attached to in this command. If you do not include this argument, the CLI tries to determine the executable file from the process. Some architectures do not allow this to occur.

*pid-list*
: A list of system-level process identifiers (such as a UNIX PID) naming the processes that TotalView controls. All PIDs must reside on the same system, and they are placed in the same control group.

If you need to place the processes in different groups or attach to processes on more than one system, you must use multiple **dattach** commands.

*Description:* The **dattach** command tells TotalView to attach to one or more processes, making it possible to continue process execution under CLI control.

This command returns the TotalView process ID (DPID) as a string. If you specify more than one process in a command, the **dattach** command returns a list of DPIDs instead of a single value.

TotalView places all processes to which it attaches in one **dattach** command in the same control group. This lets you place all processes in a multiprocess program executing on the same system in the same control group.

If a program has more than one executable, you must use a separate **dattach** command for each one.

If you have not loaded *filename* already, the CLI searches for it. The search includes all directories in the **EXECUTABLE_PATH** CLI variable.

The process identifiers specified in the *pid-list* must refer to existing processes in the runtime environment. TotalView attaches to the processes, regardless of their execution states.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| at | dattach | Brings the process under CLI control |

*Examples:*

`dattach mysys 10020`

Loads debugging information for **mysys** and brings the process known to the run-time system by PID 10020 under CLI control.

`dattach -e 123 10020`

Loads file 123 and brings the process known to the run-time system by PID 10020 under CLI control.

`dattach -g 4 -r Enterprise myfile 10020`

Loads **myfile** that is executing on the host named **Enterprise** into group 4, and brings the process known to the run-time system by PID 10020 under CLI control. If a TotalView Debugger Server (**tvdsvr**) is not running on **Enterprise**, the CLI will start it.

`dattach my_file 51172 52006`

Loads debugging information for **my_file** and brings the processes corresponding to PIDs 51172 and 52006 under CLI control.

```
set new_pid [dattach -e mainprog 123]
dattach -r otherhost -g $CGROUP($new_pid) -e slave 456
```

Begins by attaching to **mainprog** running on the local host. It then attaches to **slave** running on the **otherhost** host and inserts them both in the same control group.

## dbarrier

Defines a process or thread barrier breakpoint

*Format:* Creates a barrier breakpoint at a source location

**dbarrier** *source-loc* [ **–stop_when_hit** *width* ]
[ **–stop_when_done** *width* ]

Creates a barrier breakpoint at an address

**dbarrier –address** *addr* [ **–stop_when_hit** *width* ]
[ **–stop_when_done** *width* ]

*Arguments:*

*source-loc*
The barrier breakpoint location as a line number or as a string that contains a file name, function name, and line number, each separated by **#** characters (for example, **#file#line**). If you omit parts of this specification, the CLI creates them for you. For more information, see "*Qualifying Symbol Names*" in Chapter 12 of the *TotalView Users Guide*.

**–address** *addr*
The barrier breakpoint location as an absolute address in the address space of the program.

**–stop_when_hit** *width*
Tells the CLI what else to stop when it stops the thread that arrives at a barrier point.

If you do not use this option, the value of the **BARRIER_STOP_ALL** variable indicates what TotalView stops.

This command's *width* argument indicates what else TotalView stops. You can enter one of the following three values:

- **group** Stops all processes in the control group when the execution reaches the barrier point.
- **process** Stops the process that hit the barrier.
- **none** Stops the thread that hit the barrier; that is, the thread is held and all other threads continue running. If you apply this width to a process barrier breakpoint, TotalView stops the process that hit the breakpoint.

**–stop_when_done** *width*
After all processes or threads reach the barrier, the CLI releases all processes and threads held at the barrier. (*Released* means that these threads and processes can run.) Setting this option tells the CLI to stop additional threads contained in the same **group** or **process**.

If you do not use this option, the value of the **BARRIER_STOP_WHEN_DONE** variable indicates what else TotalView stops.

The *width* argument indicates what else is stopped. You can enter one of the following three values:

- **group** Stops the entire control group when the barrier is satisfied.

**process** Stops the processes that contain threads in the satisfaction set when the barrier is satisfied.

**none** Stops the satisfaction set. For process barriers, **process** and **none** have the same effect. This is the default if the **BARRIER_STOP_WHEN_DONE** variable is **none**.

*Description:* The **dbarrier** command sets a process or thread barrier breakpoint that triggers when execution arrives at a location. This command returns the ID of the newly created breakpoint.

You most often use the **dbarrier** command to synchronize a set of threads. The P/T set defines which threads the barrier affects. When a thread reaches a barrier, it stops, just as it does for a breakpoint. The difference is that TotalView prevents—that is, holds—each thread that reaches the barrier from responding to resume commands (for example, **dstep**, **dnext**, and **dgo**) until all threads in the affected set arrive at the barrier. When all threads reach the barrier, TotalView considers the barrier to be *satisfied* and releases these threads. They are just *released*; they are not continued. That is, TotalView leaves them stopped at the barrier. If you continue the process, those threads stopped at the barrier also run along with any other threads that were not participating with the barrier. After the threads are released, they can respond to resume commands.

If the process is stopped and then continued, the held threads, including the ones waiting on an unsatisifed barrier, do not run. Only unheld threads run.

The satisfaction set for the barrier is determined by the current focus. If the focus group is a thread group, TotalView creates a thread barrier:

- When a thread hits a process barrier, TotalView holds the thread's process.
- When a thread hits a thread barrier, TotalView holds the thread; TotalView might also stop the thread's process or control group. While they are stopped, neither is held.

TotalView determines the default focus width based on the setting of the **SHARE_ACTION_POINT** variable. If it is set to true, the default is group. Otherwise, it is process.

TotalView determines what processes and threads are part of the satisfaction set by taking the intersection of the share group with the focus set. (Barriers cannot extend beyond a share group.)

The CLI displays an error message if you use an inconsistent focus list.

*Barriers can create deadlocks. For example, if two threads participate in two different barriers, each could be left waiting at different barriers, barriers that can never be satisfied. A deadlock can also occur if a barrier is set in a procedure that is never invoked by a thread in the affected set. If a deadlock occurs, use the* **ddelete** *command to remove the barrier, since deleting the barrier also releases any threads held at the barrier.*

The **–stop_when_hit** option tells TotalView what other threads to stop when a thread arrives at a barrier.

The **–stop_when_done** option controls the set of additional threads that TotalView stops when the barrier is finally satisfied. That is, you can also stop an additional collection of threads after the last expected thread arrives and all the threads held at the barrier are released. Normally, you want to stop the threads contained in the control group.

If you omit a *stop* option, TotalView sets the default behavior by using the **BARRIER_STOP_ALL** and **BARRIER_STOP_WHEN_DONE** variables. For more information, see the **dset** command.

The **none** argument for these options tells the CLI not to stop additional threads.

- If **–stop_when_hit** is **none** when a thread hits a thread barrier, TotalView stops only that thread; it does not stop other threads.
- If **–stop_when_done** is **none**, TotalView does not stop additional threads, aside from the ones that are already stopped at the barrier.

TotalView places the barrier point in the processes or groups specified in the current focus, as follows:

- If the current focus does not indicate an explicit group, the CLI creates a process barrier across the share group.
- If the current focus indicates a process group, the CLI creates a process barrier that is satisfied when all members of that group reach the barrier.
- If the current focus indicates a thread group, TotalView creates a thread barrier that is satisfied when all members of the group arrive at the barrier.

The following example illustrates these differences. If you set a barrier with the focus set to a control group (the default), TotalView creates a process barrier. This means that the **–stop_when_hit** value is set to **process** even though you specified **thread**.

```
d1.<> dbarrier 580 -stop_when_hit thread
2
d1.<> ac 2
1 shared action point for group 3:
  2 addr=0x120005598 [../regress/fork_loop.cxx#580]
Enabled (barrier)
   Share in group: true
   Stop when hit: process
   Stop when done: process
   process barrier; satisfaction set = group 1
```

However, if you create the barrier with a specific workers focus, the stop when hit property remains set to **thread**:

```
1.<> baw 580 -stop_when_hit thread
1
d1.<> ac 1
1 unshared action point for process 1:
  1 addr=0x120005598 [../regress/fork_loop.cxx#580]
                  Enabled (barrier)
```

```
Share in group: false
Stop when hit: thread
Stop when done: process
thread barrier; satisfaction set = group 2
```

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| ba | dbarrier | Defines a barrier. |
| baw | {dfocus pW dbarrier –stop_when_done process} | Creates a thread barrier across the worker threads in the process of interest. TotalView sets the set of threads stopped when the barrier is satisfied to the process that contains the satisfaction set. |
| BAW | {dfocus gW dbarrier –stop_when_done group} | Creates a thread barrier across the worker threads in the share group of interest. The set of threads stopped when the barrier is satisfied is the entire control group. |

*Examples:*

`dbarrier 123`
Stops each process in the control group when it arrives at line 123. After all processes arrive, the barrier is satisfied and TotalView releases all processes.

`dfocus {p1 p2 p3} dbarrier my_proc`
Holds each thread in processes 1, 2, and 3 as it arrives at the first executable line in procedure **my_proc**. After all threads arrive, the barrier is satisfied and TotalView releases all processes.

`dfocus gW dbarrier 642 -stop_when_hit none`
Sets a thread barrier at line 642 in the workers group. The process is continued automatically as each thread arrives at the barrier. That is, threads that are not at this line continue running.

## dbreak

Defines a breakpoint

*Format*: Creates a breakpoint at a source location

**dbreak** *source-loc* [ –p | –g | –t ] [ [ –l *lang* ] –e *expr* ]

Creates a breakpoint at an address

**dbreak –address** *addr* [ –p | –g | –t] [ [ –l *lang* ] –e *expr* ]

*Arguments*:

| | |
|---|---|
| *source-loc* | The breakpoint location specified as a line number or as a string that contains a file name, function name, and line number, each separated by **#** characters (for example, **#file#line**). Defaults are constructed if you omit parts of this specification. For more information, see "*Qualifying Symbol Names*" in Chapter 12 of the *TotalView Users Guide*. |
| **–address** *addr* | The breakpoint location specified as an absolute address in the address space of the program. |
| **–p** | Tells TotalView to stop the process that hit this breakpoint. You can set this option as the default by setting the **STOP_ALL** variable to **process**. See **dset** on page 88 for more information. |
| **–g** | Tells TotalView to stop all processes in the process's control group when execution reaches the breakpoint. You can set this option as the default by setting the **STOP_ALL** variable to **group**. See **dset** on page 88 for more information. |
| **–t** | Tells TotalView to stop the thread that hit this breakpoint. You can set this option as the default by setting the **STOP_ALL** variable to **thread**. See **dset** on page 88 for more information. |
| **–l** *lang* | Sets the programming language used when you are entering expression *expr*. The languages you can enter are **c**, **c++**, **f7**, **f9**, and **asm** (for C, C++, FORTRAN 77, Fortran 9x, and assembler, respectively). If you do not specify a language, TotalView assumes that you wrote the expression in the same language as the routine at the breakpoint. |
| **–e** *expr* | When the breakpoint is hit, TotalView evaluates expression *expr* in the context of the thread that hit the breakpoint. The language statements and operators you can use are described in Chapter 14 of the *TotalView Users Guide*. |

*Description*: The **dbreak** command defines a breakpoint or evaluation point that TotalView triggers when execution arrives at the specified location. This command returns the ID of the new breakpoint.

Each thread stops when it arrives at a breakpoint.

Specifying a procedure name without a line number tells the CLI to set an action point at the beginning of the procedure. If you do not name a file, the default is the file associated with the current source location.

The CLI might not be able to set a breakpoint at the line you specify. This occurs when a line does not contain an executable statement.

If you try to set a breakpoint at a line at which the CLI cannot stop execution, it sets one at the nearest following line where it can halt execution.

When the CLI displays information on a breakpoint's status, it displays the location where execution actually stops.

If the CLI encounters a *stop group* breakpoint, it suspends each process in the group as well as the process that contains the triggering thread. The CLI then shows the identifier of the triggering thread, the breakpoint location, and the action point identifier.

TotalView determines the default focus width based on the setting of the **SHARE_ACTION_POINT** variable. If it is set to **true**, the default is group. Otherwise, it is process.

One possibly confusing aspect of using expressions is that their syntax differs from that of Tcl. This is because you need to embed code written in Fortran, C, or assembler in Tcl commands. In addition, your expressions often include TotalView built-in functions. For example, if you want to use the TotalView **$tid** built-in function, you need to type it as **\$tid**.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| b | break | Sets a breakpoint |
| bt | {dbreak t} | Sets a breakpoint only on the thread of interest |

*Examples:*

For all examples, assume that the current process set is **d2.<** when the breakpoint is defined.

`dbreak 12`
Suspends process 2 when it reaches line 12. However, if the **STOP_ALL** variable is set to **group**, all other processes in the group are stopped. In addition, if you set the **SHARE_ACTION_POINT** variable to **true**, the breakpoint is placed in every process in the group.

`dbreak -address 0x1000764`
Suspends process 2 when execution reaches address 0x1000764.

`b 12 -g`
Suspends all processes in the current control group when execution reaches line 12.

`dbreak 57 -l f9 -e {goto $63}`
Causes the thread that reaches the breakpoint to transfer to line 63. The host language for this statement is Fortran 90 or Fortran 95.

`dfocus p3 b 57 -e {goto $63}`

In process 3, sets the same evaluation point as the previous example.

## dcache

Clears the remote library cache

*Format*: **dcache –flush**

*Arguments*:

| | |
|---|---|
| **–flush** | Delete all files from the library cache that are not currently being used. |

*Description*: The **dcache –flush** command tells TotalView to remove the library files that it places in your cache. This cache is located in the **.totalview/lib_cache** subdirectory contained in your home directory.

When you are debugging programs on remote systems that use libraries that either do not exist on the host or whose version differ, TotalView copies the library files into your cache. This cache can become large.

TotalView automatically deletes cached library files that it hasn't used in the last week. If you need to reclaim additional space, this command removes files not currently being used and that are not quite old enough for TotalView to automatically delete.

## dcheckpoint

Creates a checkpoint image of processes (IBM and SGI)

*Format:* Creates a checkpoint on SGI IRIX

**dcheckpoint** [ *after_checkpointing* ] [ **–by** *process_set* ] [ **–no_park** ]
[ **–ask_attach_parallel** | **–no_attach_parallel** ]
[ **–no_preserve_ids** ] [ **–force** ] *checkpoint-name*

Creates a checkpoint on IBM AIX

**dcheckpoint** [ **–delete** | **–halt** ]

*Arguments:*

*after_checkpointing* Defines the state of the process both before and after the checkpoint. Use one of the following options:

- **–delete** Processes exit after the checkpoint occurs.
- **–detach** (SGI only) Processes continue running after the checkpoint occurs. In addition, TotalView detaches from them.
- **–go** (SGI only) Processes continue running after the checkpoint occurs.
- **–halt** Processes halt after the checkpoint occurs.

**–by** *process_set* (SGI only) Indicates the set of processes to checkpoint. If you do not use a *process_set* option, TotalView only checkpoints the focus process. (On AIX, the checkpoint is the scope of the Parallel Environment job.) Your options are:

- **ash** Checkpoints the array session.
- **pgid** Checkpoints the entire UNIX process group.
- **sid** Checkpoints the entire process session.

**–no_park** (SGI only) Tells TotalView not to *park* all processes before it begins checkpointing them. If you use this option, you must use the **drestart** command's **–no_unpark** option. If you restart the checkpoint from a shell, you must use this option.

**–ask_attach_parallel** (SGI only) Asks whether TotalView reattaches to parallel processes of a parallel job. (Some systems automatically detach you from processes being checkpointed.)

**–no_attach_parallel** (SGI only) Tells TotalView not to reattach to processes from which the checkpointing processes detached. (Some systems automatically detach you from processes being checkpointed.)

**–no_preserve_ids** (SGI only) Lets TotalView assign new IDs when it restarts a checkpoint. If you do not use this option, TotalView uses the same IDs.

**–force** (SGI only) Tells TotalView to overwrite an existing checkpoint.

*checkpoint-name* (SGI only) Specifies the name being assigned to the checkpoint. TotalView ignores this name if you are creating a checkpoint on an IBM/RS6000 machine.

*Description:* The **dcheckpoint** command saves program and process information to the *checkpoint-name* file. This information includes process and group IDs. Later, you use the **drestart** command to restart the program.

*This command does not save TotalView breakpoint information. If you need to save tis information, use the* **dactions** *command.*

The following restrictions exist when you are trying to checkpoint IRIX processes:

- IRIX does not checkpoint a process that is running remotely and which communicates using sockets. Since the TotalView Debugger Server (**tvdsvr**) uses sockets to redirect **stdin**, **stdout**, and **stderr**, you need to use the **drun** command to modify the way your processes send information to a **tty** before you create a checkpoint.
- If you are using SGI MPI, you need to use the **-cpr** command-line option. Use the ASH option with MPI checkpoints

The *after_checkpointing* options let you specify what happens after the checkpoint operation concludes. If you do not specify an option, the CLI tells the checkpointed processes to stop. This lets you investigate a program's state at the checkpoint position. In contrast, the **–go** option tells the CLI to let the processes continue to run. You use the **–detach** and **–halt** options less frequently. The **–detach** option shuts down the CLI and leaves the processes running. This command's **–halt** option is similar to the **–detach** option, differing only in that processes started by the CLI and TotalView also terminate.

The *process_set* options tell TotalView which processes to checkpoint. Although the focus set can only contain one process, you can also include processes in the same process group, process session, process hierarchy, or array session in the same checkpoint. If you do not use one of the **–by** options, TotalView only checkpoints the focus process.

If the focus group contains more than one process, the CLI displays an error message.

Before TotalView begins checkpointing your program, it temporarily stops (that is, *parks*) the processes that are being checkpointed. Parking ensures that the processes do not run freely after a **dcheckpoint** or **drestart** operation. (If they did, your code would begin running before you get control of it.) If you plan to restart the checkpoint file outside of TotalView, you must use the **–no_park** option.

When you create the checkpoint, the CLI detaches from processes before they are checkpointed. By default, the CLI automatically reattaches to them. If you do not want this to occur, use the **–no_attach_parallel** option to tell the CLI not to reattach, or use the **–ask_attach_parallel** option to tell the CLI to ask you whether to reattach.

*Examples:*

`dcheckpoint check1`

Checkpoints the current process. TotalView writes the checkpoint information to the *check1* file. These processes stop.

`f3 dcheckpoint check1`

Checkpoints process 3. Process 3 stops. TotalView writes the checkpoint information to the *check1* file.

`f3 dcheckpoint -go check1`

Checkpoints process 3. Process 3 continues to run. TotalView writes the checkpoint information to the *check1* file.

`f3 dcheckpoint -by pgid -detach check1`

Checkpoints process 3 and all other processes in the same UNIX process group. All of the checkpointed processes continue running but they run detached from the CLI. TotalView writes the checkpoint information to the *check1* file.

## dcont

Continues execution and waits for execution to stop

*Format*: dcont

*Arguments*: This command has no arguments

*Description*: The **dcont** command continues all processes and threads in the current focus, and then waits for all of them to stop.

This command is a Tcl macro, with the following definition:

```
proc dcont {args} {uplevel dgo; "dwait $args" }
```

You often want this behavior in scripts. You seldom want to do interactively.

*You can interrupt this action by typing Ctrl+C. This tells TotalView to stop executing these processes.*

A **dcont** command completes when all threads in the focus set of processes stop executing. If you do not indicate a focus, the default focus is the Process of Interest.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| co | dcont | Resume |
| CO | {dfocus g dcont} | Resume at group-level |

*Examples*:

`dcont`
Resumes execution of all stopped threads that are not held and which belong to processes in the current focus. (This command does not affect threads that TotalView is holding held at barriers.) The command blocks further input until all threads in all target processes stop. After the CLI displays its prompt, you can enter additional commands.

`dfocus p1 dcont`
Resumes execution of all stopped threads that are not held and which belong to process 1. The CLI does not accept additional commands until the process stops.

`dfocus {p1 p2 p3} co`
Resumes execution of all stopped threads that are not held and which belong to processes 1, 2, and 3.

`CO`
Resumes execution of all stopped threads that are not held and which belong to the current group.

## ddelete

Deletes action points

*Format*: Deletes the specified action points

**ddelete** *action-point-list*

Deletes all action points

**ddelete –a**

*Arguments*:

| | |
|---|---|
| *action-point-list* | A list of the action points to delete. |
| **–a** | Tells TotalView to delete all action points in the current focus. |

*Description*: The **ddelete** command permanently removes one or more action points. The argument to this command tells the CLI which action points to delete. The **–a** option tells the CLI to delete all action points.

If you delete a barrier point, the CLI releases the processes and threads held at it.

If you do not indicate a focus, the default focus is the Process of Interest.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| de | ddelete | Deletes action points |

*Examples*:

`ddelete 1 2 3` Deletes action points 1, 2, and 3.

`ddelete -a` Deletes all action points associated with processes in the current focus.

`dfocus {p1 p2 p3 p4} ddelete -a`
Deletes all the breakpoints associated with processes 1 through 4. Breakpoints associated with other threads are not affected.

`dfocus a de -a`
Deletes all action points known to the CLI.

## ddetach

Detaches from processes

*Format*: ddetach

*Arguments*: This command has no arguments

*Description*: The **ddetach** command detaches the CLI from all processes in the current focus. This *undoes* the effects of attaching the CLI to a running process; that is, the CLI releases all control over the process, eliminates all debugger state information related to it (including action points), and allows the process to continue executing in the normal run-time environment.

You can detach any process controlled by the CLI; the process being detached does not have to be originally loaded with a **dattach** command.

After this command executes, you are no longer able to access program variables, source location, action point settings, or other information related to the detached process.

If a single thread serves as the set, the CLI detaches the process that contains the thread. If you do not indicate a focus, the default focus is the Process of Interest.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| det | ddetach | Detaches from processes |

*Examples*:

`ddetach` Detaches the process or processes that are in the current focus.

`dfocus {p4 p5 p6} det` Detaches processes 4, 5, and 6.

`dfocus g2 det` Detaches all processes in the control group associated with process 2.

## ddisable

Temporarily disables action points

*Format*: Disables the specified action points

**ddisable** *action-point-list* [ **–block** *number-list*]

Disables all action points

**ddisable –a**

*Arguments*:

| | |
|---|---|
| *action-point-list* | A list of the action points to disable. |
| **–block** *number-list* | If you set a breakpoint on a line that is ambiguous, use this option to say which instances to disable. You can obtain a list of these numbers if you use the **dactions** command. |
| **–a** | Tells TotalView to disable all action points. |

*Description*: The **ddisable** command temporarily deactivates action points. This command does not, however, delete them.

You can explicitly name the IDs of the action points to disable or you can disable all action points.

If you do not indicate a focus, the default focus is the Process of Interest.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| di | ddisable | Temporarily disables action points |

*Examples*:

`ddisable 3 7` Disables the action points whose IDs are 3 and 7.

`di -a` Disables all action points in the current focus.

`dfocus {p1 p2 p3 p4} ddisable -a`
Disables all action points associated with processes 1 through 4. Action points associated with other processes are not affected.

`di 1 -block 3 4`
Disables the action points associated with blocks 3 and 4. That is, one logical action point can map to more than one actual action point if you set the action point at an ambiguous location.

`ddisable 1 2 -block 3 4`
Disables the action points associated with blocks 3 and 4 in action points 1 and 2.

## ddlopen

Dynamically loads shared object libraries

*Format*: Dynamically loads a shared object library

**ddlopen** [ **–now** | **–lazy** ] [ **–local** | **–global** ] [ **–mode** *int* ] *filespec*

Displays information about shared object libraries

**ddlopen** [ **–list** *dll-ids*... ]

*Arguments*:

| | |
|---|---|
| **–now** | Includes **RTLD_NOW** in the **dlopen** command's mode argument. (Now means immediately resolve all undefined symbols.) |
| **–lazy** | Includes **RTLD_LAZY** in the **dlopen** command's mode argument. (Lazy means that the **dlopen()** function does not try to resolve unresolved symbols. Instead, symbols are resolved as code is executed.) |
| **–local** | Includes **RTLD_GLOBAL** in the **dlopen** command's mode argument. (Local means that library symbols are not available to libraries that the program subsequently loads.) This argument is the default. |
| **–global** | Includes **RTLD_LOCAL** in the **dlopen** command's mode argument. (Global means that library symbols are available to libraries that the program subsequently loads.) |
| **–mode** *int* | The integer arguments are ORed into the other mode flags passed to the **dlopen()** function. (See your operating system's documentation for information on these flags.) |
| *filespec* | The shared library to load. |
| **–list** | Displays information about the listed DLL IDs. If you omit this option or use the **–list** without a DLL id list, TotalView displays information about all DLL IDs. |
| *dll-ids* | A list of one or more DLL IDs. |

*Description*: The **ddlopen** command dynamically loads shared object libraries, or lists the shared object libraries that you loaded using this or the **Tools > Dynamic Libraries** command.

If use a *filespec* argument, TotalView performs a **dlopen** operation on this file in each process in the current P/T set. If you are running on the IBM AIX operating system, you can add a parenthesized library module name to the end of the *filespec* argument.

**dlopen**(3), **dlerror**(3), *and other related routines are not part of the default runtime libraries on* AIX, *Solaris, and Red Hat Linux. Instead, they are in the* **libdl** *system library. Consequently, you must link your program using the* **–ldl** *option if you want to use the* **ddlopen** *command.*

The **–now** and **–lazy** options indicate whether **dlopen** immediately resolves unresolved symbol references or defer resolving them until the target program references them. If you don't use either option, TotalView uses your

operating system's default. (Not all platforms support both alternatives. For example, AIX treats **RTLD_LAZY** the same as **RTLD_NOW**).

The **–local** and **–global** options determine if symbols from the newly loaded library are available to resolve references. If you don't use either option, TotalView uses the target operating system's default. (HP Tru 64 UNIX doesn't support either alternative; its operation is equivalent to using the **–global** option. IRIX, Solaris, and Linux only support the **–global** option; if you don't specify an option, the default is the **–local** option.)

After you enter this command, the CLI waits until all **dlopen** calls complete across the current focus. The CLI then returns a unique *dll-id* and displays its prompt, which means that you can enter additional CLI commands. However, if an event occurs (for example, a **$stop,** a breakpoint in user function called by static object constructors, a SEGV, and so on), the **ddlopen** command throws an exception that describes the event. The first exception subcode in the **errorCode** variable is the DLL ID for the suspended **dlopen()** function call.

If an error occurs while executing the **dlopen()** function, TotalView calls the **dlerror()** function in the target process, and then prints the returned string.

A DLL ID describes a shareable object that was dynamically loaded by the **ddlopen** command. You can use the **TV:dll** command to obtain information about and delete these objects. If all **dlopen()** calls return immediately, the **ddlopen** command returns a unique DLL ID that you can also use with the **TV::dll** command.

Every DLL ID is also a valid breakpoint ID, representing the expressions used to load and unload DLLs; you can manipulate these breakpoints using the **TV::expr** command.

If you do not use a *filespec* argument or if you use the **–list** option without using a DLL ID argument, TotalView prints information about objects loaded using **ddlopen**. If you do use a DLL ID argument, TotalView prints information about DLLs loaded into all processes in the focus set; otherwise, TotalView prints information about just those DLLs. The **ddlopen** command prints its output directly to the console.

The **ddlopen** command calls the **dlopen()** function and it can change the string returned by the **dlerror()** function. I t can also change the values returned to the application by any subsequent **dlerror()** call.

*Examples:*

`ddlopen "mpistat.so"`

Loads **mpistat.so** library file. The returned argument lists the process into which TotalView loaded the library.

`dfocus g ddlopen "mpistat.so(mpistat.o)"`

Loads the module **mpistat.o** in the AIX DLL library **mpistat.so** into all members of the current process's control group:

`ddlopen -lazy -global "mpistat.so"`
: Loads **mpistat.so** into process 1, and does not resolve outstanding application symbol requests to point to **mpistat**. However, TotalView uses the symbols in this library if it needs them.

`ddlopen`
: Prints the list of shared objects dynamically loaded by the **ddlopen** command.

## ddown

Moves down the call stack

*Format:* **ddown** [ *num-levels* ]

*Arguments:*

| | |
|---|---|
| *num-levels* | Number of levels to move down. The default is 1. |

*Description:* The **ddown** command moves the selected stack frame down one or more levels. It also prints the new frame's number and function name.

Call stack movements are all relative, so using the **ddown** command effectively moves down in the call stack. (If up is in the direction of the **main()** function, then down is back to where you were before you moved through stack frames.)

Frame 0 is the most recent—that is, the currently executing—frame in the call stack, frame 1 corresponds to the procedure that invoked the currently executing frame, and so on. The call stack's depth is increased by one each time a procedure is entered, and decreased by one when it is exited.

The command affects each thread in the focus. That is, if the current width is process, the **ddown** command acts on each thread in the process. You can specify any collection of processes and threads as the target set.

In addition, the **ddown** command modifies the current list location to be the current execution location for the new frame; this means that a **dlist** command displays the code that surrounds this new location.

The context and scope changes made by this command remain in effect until the CLI executes a command that modifies the current execution location (for example, the **dstep** command), or until you enter either a **dup** or **ddown** command.

If you tell the CLI to move down more levels than exist, the CLI simply moves down to the lowest level in the stack, which was the place where you began moving through the stack frames.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| d | ddown | Moves down the call stack |

*Examples:*

`ddown`

Moves down one level in the call stack. As a result, for example, **dlist** commands that follow refers to the procedure that invoked this one. The following example shows what prints after you enter this command:

```
0 check_fortran_arrays_ PC=0x10001254,
   FP=0x7fff2ed0 [arrays.F#48]
```

`d 5`

Moves the current frame down five levels in the call stack.

# denable

Enables action points

*Format*: Enables some action points

**denable** *action-point-list* [ **–block** *number-list*]

Enables all disabled action points in the current focus

**denable –a**

*Arguments*:

| | |
|---|---|
| *action-point-list* | The identifiers of the action points being enabled. |
| **–a** | Tells TotalView to enable all action points. |
| **–block** *number-list* | If you set a breakpoint on a line that is ambiguous, this option names which instances to enable. You can obtain a list of these numbers if you use the **dactions** command. |

*Description*: The **denable** command reactivates action points that you previously disabled with the **ddisable** command. The **–a** option tells the CLI to enable all action points in the current focus.

If you did not save the ID values of disabled action points, you can use the **dactions** command to obtain a list of this information.

If you do not indicate a focus, the default focus is the Process of Interest.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| en | denable | Enables action points |

*Examples*:

`denable 3 4` Enables two previously identified action points.

`dfocus {p1 p2} denable -a`
Enables all action points associated with processes 1 and 2. This command does not affect settings associated with other processes.

`en -a` Enables all action points associated with the current focus.

`f a en -a` Enables all actions points in all processes.

`en 1 -block 3 4`
Enables the action points associated with blocks 3 and 4. That is, one logical action point can map to more than one actual action point if you set the action point at an ambiguous location.

`denable 1 2 -block 3 4`
Enables the action points associated with blocks 3 and 4 in action points 1 and 2.

## dflush

Unwinds stack from suspended computations

*Format*: Removes the top-most suspended expression evaluation

**dflush**

Removes the computation indicated by a suspended evaluation ID and all those that precede it

**dflush** *susp-eval-id*

Removes all suspended computations

**dflush –all**

*Arguments*:

| | |
|---|---|
| *susp-eval-id* | The ID returned or thrown by the **dprint** command or which is printed by the **dwhere** command. |
| **–all** | Flushes all suspended evaluations in the current focus. |

*Description*: The **dflush** command unwinds the stack to eliminate frames generated by suspended computations. Typically, these can occur if you used the **dprint –nowait** command. However, this situation can occur, for example, if an error occurred in a function call in an eval point, in an expression in a **Tools** > **Evaluate** window, or if you use a **$stop** function.

You can use this command in the following ways:

- If you don't use an argument, the CLI unwinds the top-most suspended evaluation in all threads in the current focus.
- If you use a *susp-eval-id*, the CLI unwinds each stack of all threads in the current focus, flushing all pending computations up to and including the frame associated with the ID.
- If you use the **–all** option, the CLI flushes all suspended evaluations in all threads in the current focus.

If no evaluations are suspended, the CLI ignores this command. If you do not indicate a focus, the default focus is the Thread of Interest.

*Examples*: The following example uses the **dprint** command to place five suspended routines on the stack. It then uses the **dflush** command to remove them. This example uses the **dflush** command in three different ways.

```
#
# Create 5 suspended functions
#
d1.<> dprint -nowait nothing2(7)
7
Thread 1.1 hit breakpoint 4 at line 310 in "nothing2(int)"
d1.<> dprint -nowait nothing2(8)
8
Thread 1.1 hit breakpoint 4 at line 310 in "nothing2(int)"
d1.<> dprint -nowait nothing2(9)
9
Thread 1.1 hit breakpoint 4 at line 310 in "nothing2(int)"
```

```
d1.<> dprint -nowait nothing2(10)
10
Thread 1.1 hit breakpoint 4 at line 310 in "nothing2(int)"
d1.<> dprint -nowait nothing2(11)
11
Thread 1.1 hit breakpoint 4 at line 310 in "nothing2(int)"
...

#
# The top of the call stack looks like:
#

d1.<> dwhere
   0 nothing2    PC=0x00012520, FP=0xffbef130 [fork.cxx#310]
   1 ***** Eval Function Call (11) ****************
   2 nothing2    PC=0x00012520, FP=0xffbef220 [fork.cxx#310]
   3 ***** Eval Function Call (10) ****************
   4 nothing2    PC=0x00012520, FP=0xffbef310 [fork.cxx#310]
   5 ***** Eval Function Call (9) ****************
   6 nothing2    PC=0x00012520, FP=0xffbef400 [fork.cxx#310]
   7 ***** Eval Function Call (8) ****************
   8 nothing2    PC=0x00012520, FP=0xffbef4f0 [fork.cxx#310]
   9 ***** Eval Function Call (7) ****************
  10 forker      PC=0x00013fd8, FP=0xffbef648 [fork.cxx#1120]
  11 fork_wrap   PC=0x00014780, FP=0xffbef6c8 [fork.cxx#1278]
    ...

#
# Use the dflush commandto remove the last item pushed
# onto the stack. Notice the frame associated with “11”
# is no longer there.
#

d1.<> dflush
d1.<> dwhere
   0 nothing2    PC=0x00012520, FP=0xffbef220 [fork.cxx#310]
   1 ***** Eval Function Call (10) ****************
   2 nothing2    PC=0x00012520, FP=0xffbef310 [fork.cxx#310]
   3 ***** Eval Function Call (9) ****************
   4 nothing2    PC=0x00012520, FP=0xffbef400 [fork.cxx#310]
   5 ***** Eval Function Call (8) ****************
   6 nothing2    PC=0x00012520, FP=0xffbef4f0 [fork.cxx#310]
   7 ***** Eval Function Call (7) ****************
   8 forker      PC=0x00013fd8, FP=0xffbef648 [fork.cxx#1120]
   9 fork_wrap   PC=0x00014780, FP=0xffbef6c8 [fork.cxx#1278]

#
# Use the dflush command with a suspened ID argument to remove
# all frames up to and including the one associated with
# suspended ID 9. This means that IDs 7 and 8 remain.
#
```

```
d1.<> dflush 9
# Top of call stack after dflush 9
d1.<> dwhere
   0 nothing2    PC=0x00012520, FP=0xffbef400 [fork.cxx#310]
   1 ***** Eval Function Call (8) ****************
   2 nothing2    PC=0x00012520, FP=0xffbef4f0 [fork.cxx#310]
   3 ***** Eval Function Call (7) ****************
   4 forker      PC=0x00013fd8, FP=0xffbef648 [fork.cxx#1120]
   5 fork_wrap   PC=0x00014780, FP=0xffbef6c8 [fork.cxx#1278]

#
# Use dflush -all to remove all frames. Only the frames
# associated with the program remain.
#

d1.<> dflush -all
# Top of call stack after dflush -all
d1.<> dwhere
   0 forker      PC=0x00013fd8, FP=0xffbef648 [fork.cxx#1120]
   1 fork_wrap   PC=0x00014780, FP=0xffbef6c8 [fork.cxx#1278]
```

## dfocus

Changes the current (Process/Thread P/T) set

*Format:* Changes the target of future CLI commands to this P/T set

**dfocus** *p/t-set*

Executes a command in this P/T set

**dfocus** *p/t-set command*

*Arguments:*

| | |
|---|---|
| *p/t-set* | A set of processes and threads. This set defines the target upon which the CLI commands that follow will act. |
| *command* | A CLI command that operates on its own local focus. |

*Description:* The **dfocus** command changes the set of processes, threads, and groups upon which a command acts. This command can change the focus for all commands that follow it or just the command that immediately follows.

The **dfocus** command always expects a P/T value as its first argument. This value can either be a single arena specifier or a list of arena specifiers. The default focus is **d1.<**, which selects the first user thread. The **d** (for default) indicates that each CLI command is free to use its own default width.

If you enter an optional *command*, the focus is set temporarily, and the CLI executes the *command* in the new focus. After the *command* executes, the CLI restores focus to its original value. The *command* argument can be a single command or a list.

If you use a *command* argument, the **dfocus** command returns the result of this command's execution. If you do not enter use a *command* argument, the **dfocus** command returns the focus as a string value.

*Instead of a P/T set, you can type a P/T set expression. These expressions are described in "Using P/T Set Operators" in Chapter 11 of the TotalView Users Guide.*

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| f | dfocus | Changes the object upon which a command acts |

*Examples:*

| | |
|---|---|
| `dfocus g dgo` | Continues the TotalView group that contains the focus process. |
| `dfocus p3 {dhalt; dwhere}` | Stops process 3 and displays backtraces for each of its threads. |
| `dfocus 2.3` | Sets the focus to thread 3 of process 2, where 2 and 3 are TotalView process and thread identifier values. The focus becomes **d2.3**. |
| `dfocus 3.2`<br>`dfocus .5` | Sets and then resets command focus. A focus command that includes a dot and omits the process value |

tells the CLI to use the current process. Thus, this sequence of commands changes the focus to *process* 3, *thread* 5 (**d3.5**).

`dfocus g dstep`
Steps the current group. Although the thread of interest is determined by the current focus, this command acts on the entire group that contains that thread.

`dfocus {p2 p3} {dwhere ; dgo}`
Performs a backtrace on all threads in processes 2 and 3, and then tells these processes to execute.

`f 2.3 {f p w; f t s; g}`
Executes a backtrace (**dwhere**) on all the threads in process 2, steps thread 3 in process 2 (without running any other threads in the process), and continues the process.

`dfocus p1`
Changes the current focus to include just those threads currently in process 1. The width is set to process. The CLI sets the prompt to **p1.<**.

`dfocus a`
Changes the current set to include all threads in all processes. After you execute this command, your prompt changes to **a1.<**. This command alters CLI behavior so that actions that previously operated on a thread now apply to all threads in all processes.

`dfocus gW dstatus`
Displays the status of all worker threads in the control group. The width is group level and the target is the workers group.

`dfocus pW dstatus`
Displays the status of all worker threads in the current focus process. The width is process level and the target is the workers group.

`f {breakpoint(a) | watchpoint(a)} st`
Shows all threads that are stopped at breakpoints or watchpoints.

`f {stopped(a) - breakpoint(a)} st`
Shows all stopped threads that are not stopped at breakpoints.

Chapter 11 of the *TotalView Users Guide* contains additional **dfocus** examples.

# dga

Displays Global Array variables

*Format:* **dga** [–**lang** *lang_type*] [*handle_or_name*] [*slice*]

*Arguments:*

| | |
|---|---|
| –**lang** | Tells TotalView which language conventions to use when displaying information. If you omit this option, TotalView uses the language used by the thread of interest. |
| *lang_type* | Tells TotalView which language type it uses when displaying a global array. Your choices are either "**c**" or "**f**". |
| *handle_or_name* | Tells TotalView to display an array. This can either be a numeric handle or the name of the array. If you omit this argument, TotalView displays a list of all Global Arrays. |
| *slice* | Tells TotalView to only display a slice (that is, part of an array). If you are using C, you must place the array designators within braces **{}** because square brackets ([]) has special meaning in Tcl. |

*Description:* The **dga** command tells TotalView to display information about Global Arrays.

If the focus includes more than one process, TotalView prints a list for each process in the focus. Because the arrays are global, each list is identical. If there is more than one thread in the focus, TotalView prints the value of the array as it is seen from that thread.

In almost all cases, you should change the focus to **d2.<** so that you don't include a starter process such as **prun**.

*Examples:*

`dga` TotalView displays a list of Global Arrays; for example:

```
lb_dist
  Handle        -1000
  Ghosts        yes
  C type        <double>[129][129][27]
  Fortran Type    \
                <double precision(27,129,129)

bc_mask
  Handle        -999
  Ghosts        yes
  C type        long[129][129]
  Fortran Type  <integer>(129,129)
```

`dga bc_mask (:2,:2)` Displays a slice of the **bc_mask** variable; for example:

```
bc_mask(:2,:2) = {
  (1,1) = 1 (0x00000001)
  (2,1) = 1 (0x00000001)
  (1,2) = 1 (0x00000001)
  (2,2) = 0 (0x00000000)
}
```

`dga -lang c -998 {[:1]{:1]}`

Displays the same **bc_mask** variable as in the previous example in C format. In this case, the command refers to the variable to by its handle.

# dgo

Resumes execution of processes

*Format*: **dgo**

*Arguments*: This command has no arguments

*Description*: The **dgo** command tells all nonheld processes and threads in the current focus to resume execution. If the process does not exist, this command creates it, passing it the default command arguments. These can be arguments passed into the CLI, or they can be the arguments set with the **drerun** command. If you are also using the TotalView GUI, you can set this value by using the **Process** > **Startup Parameters** command.

If a process or thread is held, it ignores this command.

You cannot use a **dgo** command when you are debugging a core file, nor can you use it before the CLI loads an executable and starts executing it.

If you do not indicate a focus, the default focus is the Process of Interest.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| g | dgo | Resumes execution |
| G | {dfocus g dgo} | Resume group |

*Examples*:

| | |
|---|---|
| `dgo` | Resumes execution of all stopped threads that are not held and which belong to processes in the current focus. (Threads held at barriers are not affected.) |
| `G` | Resumes execution of all threads in the current control group. |
| `f p g` | Continues the current process. Only threads that are not held can run. |
| `f g g` | Continues all processes in the control group. Only processes and threads that are not held are allowed to run. |
| `f gL g` | Continues all threads in the share group that are at the same PC as the thread of interest. |
| `f pL g` | Continues all threads in the current process that are at the same PC as the thread of interest. |
| `f t g` | Continues a single thread. |

## dgroups

Manipulates and manages groups

*Format*: Adds members to thread and process groups

**dgroups –add** [ **–g** *gid* ] [ *id-list* ]

Deletes groups

**dgroups –delete** [ **–g** *gid* ]

Intersects a group with a list of processes and threads

**dgroups –intersect** [ **–g** *gid* ] [ *id-list* ]

Prints process and thread group information

**dgroups** [ **–list** ] [ *pattern-list* ]

Creates a new thread or process group

**dgroups –new** [ *thread_or_process* ] [ **–g** *gid* ] [ *id-list* ]

Removes members from thread or process groups

**dgroups –remove** [ **–g** *gid* ] [ *id-list* ]

*Arguments*:

| | |
|---|---|
| **–g** *gid* | The group ID upon which the command operates. The *gid* value can be an existing numeric group ID, an existing group name, or, if you are using the **–new** option, a new group name. |
| *id-list* | A Tcl list that contains process and thread IDs. Process IDs are integers; for example, 2 indicates process 2. Thread IDs define a *pid.tid* pair and look like decimal numbers; for example, 2.3 indicates process 2, thread 3. If the first element of this list is a group tag, such as the word **control**, the CLI ignores it. This makes it easy to insert all members of an existing group as the items to be used in any of these operations. (See the **dset** command's discussion of the **GROUP(gid)** variable for information on group designators.) These words appear in some circumstances when TotalView returns lists of elements in P/T sets. |
| *pattern-list* | A pattern to be matched against group names. The pattern is a Tcl regular expression. |
| *thread_or_process* | Keywords that tell TotalView to create a new process or thread group. You can specify one of the following arguments: **t**, **thread**, **p**, or **process**. |

*Description*: The **dgroups** command lets you perform the following functions:

- Add members to process and thread groups.
- Create a group.
- Intersect a group with a set of processes and threads.
- Delete groups.
- Display the name and contents of groups.
- Remove members from a group.

## dgroups –add

The **dgroups –add** command adds members to one or more thread or process groups. TotalView adds each of these threads and processes to the group. If you add a:

- Process to a thread group, TotalView adds all of its threads.
- Thread to a process group, TotalView adds the thread's parent process.

You can abbreviate the **–add** option to **–a**.

The CLI returns the ID of this group.

You can explicitly name the items being added by using an *id-list* argument. If you do not use an *id-list* argument, the CLI adds the threads and processes in the current focus. Similarly, you can name the group to which the CLI adds members if you use the **–g** option. If you omit the **–g** option, the CLI uses the groups in the current focus.

If the *id-list* argument contains processes, and the target is a thread group, the CLI adds all threads from these processes. If it contains threads and the target is a process group, TotalView adds the parent process for each thread.

*If you specify an id-list argument and you also use the* **–g** *option, the* CLI *ignores the focus. You can use two* **dgroups -add** *commands instead.*

If you try to add the same object more than once to a group, the CLI only adds it once.

TotalView does not let you use this command to add a process to a control group. If you need to perform this operation, you can use the **CGROUP(dpid)** variable; for example:

```
dset CGROUP($mypid) $new_group_id
```

## dgroups –delete

The **dgroups –delete** command deletes the target group. You can only delete groups that you create; you cannot delete groups that TotalView creates.

## dgroups –intersect

The **dgroups –intersect** command intersects a group with a set of processes and threads. If you intersect a thread group with a process, the CLI includes all of the process's threads. If you intersect a process group with a thread, the CLI uses the thread's process.

After this command executes, the group no longer contains members that were not in this intersection.

You can abbreviate the **–intersect** option to **–i**.

### dgroups –list

The **dgroups –list** command prints the name and contents of process and thread groups. If you specify a *pattern-list* as an argument, the CLI only prints information about groups whose names match this pattern. When entering a list, you can specify a *pattern*. The CLI matches this pattern against the list of group names by using the Tcl **regex** command.

*If you do not enter a pattern, the* CLI *only displays groups that you have created which have nonnumeric names.*

The CLI returns information from this command; the information is not returned.

You can abbreviate **–list** to **–l**.

### dgroups –new

The **dgroups –new** command creates a new thread or process group and adds threads and processes to it. If you use a name with the **–g** option, the CLI uses that name for the group ID; otherwise, it assigns a new numeric ID. If the group you name already exists, the CLI replaces it with the newly created group.

The CLI returns the ID of the newly created group.

You can explicitly name the items being added by using an *id-list* argument. If you do not use an *id-list* argument, the CLI adds the threads and processes in the current focus.

If the *id-list* argument contains processes, and the target is a thread group, the CLI adds all threads from these processes. If it contains threads and the target is a process group, TotalView adds the parent process for each thread.

*If you use an id-list argument and also use the* **–g** *option, the* CLI *ignores the focus.You can use two* **dgroups -add** *commands instead.*

If you are adding more than one object and one of these objects is a duplicate, TotalView adds the nonduplicate objects to the group.

You can abbreviate the **–new** option to **–n**.

### dgroups –remove

The **dgroups –remove** command removes members from one or more thread or process groups. If you remove a process from a thread group, TotalView removes all of its threads. If remove a thread from a process group, TotalView removes its parent process.

You cannot remove processes from a control group. You can, however, move a process from one control group to another by using the **dset** command to assign it to the **CGROUP(dpid)** variable group.

Also, you cannot use this command on read-only groups, such as share groups.

You can abbreviate the **–remove** option to **–r**.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| gr | dgroups | Manipulates a group |

*Examples:*

**dgroups –add**

`f tW gr -add` Adds the focus thread to its workers group.

`dgroups -add` Adds the current focus thread to the current focus group.

`set gid [dgroups -new thread ($CGROUP(1))]`
Creates a new thread group that contains all threads from all processes in the control group for process 1.

`f $a_group/9 dgroups -add`
Adds process 9 to a user-defined group.

**dgroups –delete**

`gr -delete -g mygroup`
Deletes the **mygroup** group.

**dgroups –intersect**

`dgroups -intersect -g 3 3.2`
Intersects thread 3.2 with group 3. If group 3 is a thread group, this command removes all threads except 3.2 from the group; if it is a process group, this command removes all processes except process 3 from it.

`f tW gr -i` Intersects the focus thread with the threads in its workers group.

`f gW gr -i -g mygroup`
Removes all nonworker threads from the **mygroup** group.

**dgroups –list**

`dgroups -list` Tells TotalView to display information about all named groups; for example:

```
ODD_P: {process 1 3}
EVEN_P: {process 2 4}
```

`gr -l *` Tells TotalView to display information about groups in the current focus.

```
1: {control 1 2 3 4}
2: {workers 1.1 1.2 1.3 1.4 2.1 2.2 2.3
2.4 3.1
   3.2 3.3 3.4 4.1 4.2 4.3 4.4}
3: {share 1 2 3 4}
ODD_P: {process 1 3}
EVEN_P: {process 2 4}
```

### dgroups –new

`gr -n t -g mygroup $GROUP($CGROUP(1))`

Creates a new thread group named **mygroup** that contains all threads from all processes in the control group for process 1.

`set mygroup [dgroups -new]`

Creates a new process group that contains the current focus process.

### dgroups –remove

`dgroups -remove -g 3 3.2`

Removes thread 3.2 from group 3.

`f W dgroups -add`

Marks the current thread as being a worker thread.

`f W dgroups -r` Indicates that the current thread is not a worker thread.

## dhalt

Suspends execution of processes

*Format*: dhalt

*Arguments*: This command has no arguments

*Description*: The **dhalt** command stops all processes and threads in the current focus.

If you do not indicate a focus, the default focus is the Process of Interest.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| h | dhalt | Suspends execution |
| H | {dfocus g dhalt} | Suspends group execution |

*Examples*:

`dhalt` Suspends execution of all *running* threads belonging to processes in the current focus. (This command does not affect threads held at barriers.)

`f t 1.1 h` Suspends execution of thread 1 in process 1. Note the difference between this command and **f 1.< dhalt**. If the focus is set as thread level, this command halts the first user thread, which is probably thread 1.

## dheap

Controls heap debugging

*Format*: Shows Memory Debugger state

**dheap** [ **–status** ]

Shows information about a backtrace

**dheap –backtrace** [ *subcommands* ]

Enables or disables the Memory Debugger

**dheap { –enable | –disable }**

Enables and disables the retaining (hoarding) of freed memory blocks

**dheap –hoard** [ *subcommands* ]

Displays Memory Debugger information

**dheap –info** [ *subcommands* ]

Indicates whether an address is within a deallocated block

**dheap –is_dangling** *address*

Locates memory leaks

**dheap –leaks** [ **–check_interior** ]

Enables or disables Memory Debugger event notification

**dheap –[no]notify**

Paints memory with a distinct pattern

**dheap –paint** [ *subcommands* ]

Enables and disables allocation and reallocation notification

**dheap –tag_alloc** *subcommand* [ *start_address* [ *end_address*] ]

Displays the Memory Debugger's version number

**dheap –version**

*Description*: The dheap command is described in Chapter 3 of the *Debugging Memory Problems Using TotalView* Guide.

# dhold

Holds threads or processes

*Format:*

Holds processes

**dhold –process**

Holds threads

**dhold –thread**

*Arguments:*

| | |
|---|---|
| **–process** | Holds processes in the current focus. You can abbreviate the **–process** option to **–p**. |
| **–thread** | Holds threads in the current focus. You can abbreviate the **–thread** option to **–t**. |

*Description:*

The **dhold** command holds the threads and processes in the current focus.

*You cannot hold system manager threads. In all cases, holding threads that aren't part of your program always involves some risk.*

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| hp | {dhold –process} | Holds the focus process |
| HP | {f g dhold –process} | Holds all processes in the focus group |
| ht | {f t dhold –thread} | Holds the focus thread |
| HT | {f g dhold –thread} | Holds all threads in the focus group |
| htp | {f p dhold –thread} | Holds all threads in the focus process |

*Examples:*

| | |
|---|---|
| `f W HT` | Holds all worker threads in the focus group. |
| `f s HP` | Holds all processes in the share group. |
| `f $mygroup/ HP` | Holds all processes in the group identified by the contents of **mygroup**. |

## dkill

Terminates execution of processes

*Format*: dkill

*Arguments*: This command has no arguments

*Description*: The **dkill** command terminates all processes in the current focus.

Because the executables associated with the defined processes are still loaded, using the **drun** command restarts the processes.

The **dkill** command alters program state by terminating all processes in the affected set. In addition, TotalView destroys any spawned processes when the process that created them is killed. The **drun** command can only restart the initial process.

If you do not indicate a focus, the default focus is the Process of Interest. If, however, you kill the primary process for a control group, all of the slave processes are killed.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| k | dkill | Terminates a process's execution |

*Examples*:

`dkill` Terminates all threads belonging to processes in the current focus.

`dfocus {p1 p3} dkill`
Terminates all threads belonging to processes 1 and 3.

## dlappend

Appends list elements to a TotalView variable

*Format*: **dlappend** *variable-name value* [ ... ]

*Arguments*:

| | |
|---|---|
| *variable-name* | The variable to which values are appended. |
| *value* | The values to append. |

*Description*: The **dlappend** command appends list elements to a TotalView variable. The **dlappend** command performs the same function as the Tcl **lappend** command, differing in that **dlappend** does not create a new debugger variable. That is, the following Tcl command creates a variable named **foo**:

```
lappend foo 1 3 5
```

In contrast, the following command displays an error message:

```
dlappend foo 1 3 5
```

*Examples*:

`dlappend TV::process_load_callbacks my_load_callback`

Adds the **my_load_callback** function to the list of functions in the **TV::process_load_callbacks** variable.

## dlist

Displays source code lines

*Format*: Displays source code relative to the current list location

**dlist** [ –**n** *num-lines* ]

Displays source code relative to a named place

**dlist** *source-loc* [ –**n** *num-lines* ]

Displays source code relative to the current execution location

**dlist** –**e** [ –**n** *num-lines* ]

*Arguments*:

–**n** *num-lines* — Displays this number of lines rather than the default number. (The default is the value of the **MAX_LIST** variable.) If *num-lines* is negative, the CLI displays lines before the current location, and additional **dlist** commands show preceding lines in the file rather than succeeding lines.

This option also sets the value of the **MAX_LIST** variable to *num-lines*.

*source-loc* — The location at which the CLI begins displaying information. Specify this location as a line number or as a string that contains a file name, function name, and line number, each separated by **#** characters; for example: **file#func#line**. (For more information, see "*Qualifying Symbol Names*" in Chapter 11 of the *TotalView Users Guide*.) The CLI creates defaults if you omit parts of this specification.

–**e** — Sets the display location to include the current execution point of the thread of interest. If you use **dup** and **ddown** commands to select a buried stack frame, this location includes the PC (program counter) for that stack frame.

*Description*: The **dlist** command displays source code lines relative to a place in the source code. (This position is called the *list location*.) The CLI prints this information; it is not returned. If you do not specify *source-loc* or –**e**, the command continues where the previous list command stopped. To display the thread's execution point, use the **dlist** –**e** command.

If you enter a file or procedure name, the listing begins at the file or procedure's first line.

The default focus for this command is thread level. If your focus is at process level, TotalView acts on each thread in the process.

The first time you use the **dlist** command after you focus on a different thread—or after the focus thread runs and stops again—the location changes to include the current execution point of the new focus thread.

The CLI expands tabs in the source file as blanks in the output. The **TAB_WIDTH** variable controls the tab stop width, which has a default value of 8. If **TAB_WIDTH** is set to –1, no tab processing is done, and the CLLI displays tabs using their ASCII value.

All lines appear with a line number and the source text for the line. The following symbols are also used:

@ An action point is set at this line.

> The PC for the current stack frame is at the indicated line and this is the leaf frame.

= The PC for the current stack frame is at the indicated line and this is a buried frame; this frame has called another function so that this frame is not the active frame.

These correspond to the marks shown in the backtrace displayed by the **dwhere** command that indicates the selected frame.

Here are some general rules:

- The initial display location is **main()**.
- The CLI sets the display location to the current execution location when the focus is on a different thread.

If the *source-loc* argument is not fully qualified, the CLI looks for it in the directories named in the CLI **EXECUTABLE_PATH** variable.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| l | dlist | Displays lines |

*Examples:* The following examples assume that the **MAX_LIST** variables equals 20, which is its initial value.

`dlist` Displays 20 lines of source code, beginning at the current list location. The list location is incremented by 20 when the command completes.

`dlist 10` Displays 20 lines, starting with line 10 of the file that corresponds to the current list location. Because this uses an explicit value, the CLI ignores the previous command. The list location is changed to line 30.

`dlist -n 10` Displays 10 lines, starting with the current list location. The value of the list location is incremented by 10.

`dlist -n -50` Displays source code preceding the current list location; shows 50 lines, ending with the current source code location. The list location is decremented by 50.

`dlist do_it` Displays 20 lines in procedure **do_it**. Changes the list location so that it is the twentieth line of the procedure.

`dfocus 2.< dlist do_it`
Displays 20 lines in the **do_it** routine associated with process 2. If the current source file is named **foo**, you can also specify this as **dlist foo#do_it**, naming the executable for process 2.

`dlist -e` Displays 20 lines starting 10 lines above the current execution location.

`f 1.2 l -e` Lists the lines around the current execution location of thread 2 in process 1.

`dfocus 1.2 dlist -e -n 10`

Produces essentially the same listing as the previous example, differing in that it displays 10 lines.

`dlist do_it.f#80 -n 10`

Displays 10 lines, starting with line 80 in file **do_it.f**. Updates the list location to line 90.

## dload

Loads debugging information

*Format*: **dload** [ –**g** *gid* ] [ –**r** *hname* ] [ –**e** ] *executable*

*Arguments*:

| | |
|---|---|
| –**g** *gid* | Sets the control group for the process being added to the group ID specified by *gid*. This group must already exist. (The CLI **GROUPS** variable contains a list of all groups.) |
| –**r** *hname* | The host on which the process will run. The CLI launches a TotalView Debugger Server on the host machine if one is not already running there. (See Chapter 5, "*Setting Up Parallel Debugging Sessions*" in the *TotalView Users Guide* for information on the server launch commands.) |
| –**e** | Indicates that the next argument is a file name. You need to use this argument if the file name begins with a dash or only uses numeric characters. |
| *executable* | A fully or partially qualified file name for the file corresponding to the program. |

*Description*: The **dload** command creates a new TotalView process object for the *executable* file. The **dload** command returns the TotalView ID for the new object.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| lo | dload | Loads debugging information |

*Examples*:

`dload do_this`
Loads the debugging information for the **do_this** executable into the CLI. After this command completes, the process does not yet exist and no address space or memory is allocated to it.

`lo -g 3 -r other_computer do_this`
Loads the debugging information for the **do_this** executable that is executing on the **other_computer** machine into the CLI. This process is placed into group 3.

`f g3 lo -r other_computer do_this`
Does not do what you would expect it to do because the **dload** command ignores the focus command. Instead, this does exactly the same thing as the previous example.

`dload -g $CGROUP(2) -r slowhost foo`
Loads another process based on image **foo** on machine **slowhost**. TotalView places this process in the same group as process 2.

## dmstat

Displays memory use information

*Format:* dmstat

*Arguments:* This command has no arguments

*Description:* The **dmstat** command displays information about how your program is using memory. The CLI returns memory information in three parts, as follows:

- **Memory usage summary**: Indicates the minimum and maximum amounts of memory used by the text and data segments, the heap, and the stack, as well as the virtual memory stack usage and the virtual memory size.
- **Individual process statistics**: Shows the amount of memory that each process is currently using.
- **Image information**: Lists the name of the image, the image's text size, the image's data size, and the set of processes using the image.

The following table contains definitions of the columns the CLI displays:

| Column | Description |
|---|---|
| text | The amount of memory used to store your program's machine code instructions. The text segment is sometimes called the code segment. |
| data | The amount of memory used to store initialized and uninitialized data. |
| heap | The amount of memory currently being used for data created at run time; for example, calls to the **malloc()** function allocate space on the heap while the **free()** function releases it. |
| stack | The amount of memory used by the currently executing routine and all of the routines in its backtrace.<br>If this is a multithreaded process, TotalView only shows information for the main thread's stack. Note that the stacks of other threads might not change over time on some architectures.<br>On some systems, the space allocated for a thread is considered part of the heap.<br>For example, if your main routine invokes function **foo()**, the stack contains two groups of information—these groups are called frames. The first frame contains the information required for the execution of your main routine, and the second, which is the current frame, contains the information needed by the **foo()** function. If **foo()** invokes the **bar()** function, the stack contains three frames. When **foo()** finishes executing, the stack only contains one frame. |

| Column | Description |
|---|---|
| stack_vm | The logical size of the stack is the difference between the current value of the stack pointer and the address from which the stack originally grew. This value can differ from the size of the virtual memory mapping in which the stack resides. For example, the mapping can be larger than the logical size of the stack if the process previously had a deeper nesting of procedure calls or made memory allocations on the stack, or it can be smaller if the stack pointer has advanced but the intermediate memory has not been touched.<br>The **stack_vm** value is this size difference. |
| vm_size | The sum of the sizes of the mappings in the process's address space. |

*Examples:*

`dmstat`

**dmstat** is sensitive to the focus, as this example from a four-process program shows:

```
process: text      data    heap  stack  [stack_vm]   vm_size
   1   (9271): 1128.54K  16.15M   9976       10432   [16384]

image information:
                     image_name      text        data  dpids
 ....ry/forked_mem_exampleLINUX      2524    16778479  1
      /lib/i686/libpthread.so.0     32172       27948  1
            /lib/i686/libc.so.6   1050688      122338  1
             /lib/ld-linux.so.2     70240       10813  1
```

`dfocus a dmstat`

The CLI prints the following for a four-process program:

```
     process:     text   data  heap  stack [stack_vm] vm_size
 1    (9979): 1128.54K 16.15M 14072 273168 [  278528]  17.69M
 5    (9982): 1128.54K 16.15M  9976  10944 [   16384]  17.44M
 6    (9983): 1128.54K 16.15M  9976  10944 [   16384]  17.44M
 7    (9984): 1128.54K 16.15M  9976  10944 [   16384]  17.44M

maximum:
 1    (9979): 1128.54K 16.15M 14072 273168 [  278528]  17.69M
minimum
 5    (9982): 1128.54K 16.15M  9976  10944 [   16384]  17.44M

image information:
                    image_name     text        data  dpids
....ry/forked_mem_exampleLINUX     2524    16778479  1 5 6 7
     /lib/i686/libpthread.so.0    32172       27948  1 5 6 7
           /lib/i686/libc.so.6  1050688      122338  1 5 6 7
            /lib/ld-linux.so.2    70240       10813  1 5 6 7
```

## dnext

Steps source lines, stepping over subroutines

*Format:* **dnext** [ *num-steps* ]

*Arguments:*

| | |
|---|---|
| *num-steps* | An integer greater than 0, indicating the number of source lines to be executed. |

*Description:* The **dnext** command executes source lines; that is, it advances the program by steps (source line statements). However, if a statement in a source line invokes a routine, the **dnext** command executes the routine as if it were one statement; that is, it steps *over* the call.

The optional *num-steps* argument tells the CLI how many **dnext** operations to perform. If you do not specify *num-steps*, the default is 1.

The **dnext** command iterates over the arenas in its focus set, performing a thread-level, process-level, or group-level step in each arena, depending on the width of the arena. The default width is **process** (**p**).

For more information on stepping in processes and threads, see **dstep** on page 91.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| n | dnext | Runs the thread of interest one statement while allowing other threads in the process to run. |
| N | {dfocus g dnext} | A group stepping command. This searches for threads in the share group that are at the same PC as the thread of interest, and steps one such aligned thread in each member one statement. The rest of the control group runs freely. |
| nl | {dfocus L dnext} | Steps the process threads in lockstep. This steps the thread of interest one statement and runs all threads in the process that are at the same PC as the thread of interest to the same statement. Other threads in the process run freely. The group of threads that is at the same PC is called the *lockstep group*.<br>This alias does not force process width. If the default focus is set to **group**, this steps the group. |
| NL | {dfocus gL dnext} | Steps lockstep threads in the group. This steps all threads in the share group that are at the same PC as the thread of interest one statement. Other threads in the control group run freely. |

| Alias | Definition | Description |
|---|---|---|
| nw | {dfocus W dnext} | Steps worker threads in the process. This steps the thread of interest one statement, and runs all worker threads in the process to the same (goal) statement. The nonworker threads in the process run freely.<br>This alias does not force process width. If the default focus is set to **group**, this steps the group. |
| NW | {dfocus gW dnext} | Steps worker threads in the group. This steps the thread of interest one statement, and runs all worker threads in the same share group to the same statement. All other threads in the control group run freely. |

*Examples:*

`dnext` Steps one source line.

`n 10` Steps ten source lines.

`N` Steps one source line. It also runs all other processes in the group that are in the same lockstep group to the same line.

`f t n` Steps the thread one statement.

`dfocus 3. dnext` Steps process 3 one step.

## dnexti

Steps machine instructions, stepping over subroutines

*Format:* **dnexti** [ *num-steps* ]

*Arguments:*

| | |
|---|---|
| *num-steps* | An integer greater than 0, indicating the number of instructions to be executed. |

*Description:* The **dnexti** command executes machine-level instructions; that is, it advances the program by a single instruction. However, if the instruction invokes a subfunction, the **dnexti** command executes the subfunction as if it were one instruction; that is, it steps *over* the call. This command steps the thread of interest while allowing other threads in the process to run.

The optional *num-steps* argument tells the CLI how many **dnexti** operations to perform. If you do not specify *num-steps*, the default is 1.

The **dnexti** command iterates over the arenas in the focus set, performing a thread-level, process-level, or group-level step in each arena, depending on the width of the arena. The default width is **process** (**p**).

For more information on stepping in processes and threads, see **dstep** on page 91.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| ni | dnexti | Runs the thread of interest one instruction while allowing other threads in the process to run. |
| NI | {dfocus g dnexti} | A group stepping command. This searches for threads in the share group that are at the same PC as the thread of interest, and steps one such aligned thread in each member one instruction. The rest of the control group runs freely. |
| nil | {dfocus L dnexti} | Steps the process threads in lockstep. This steps the thread of interest one instruction, and runs all threads in the process that are at the same PC as the thread of interest to the same statement. Other threads in the process run freely. The group of threads that is at the same PC is called the *lockstep group*. This alias does not force process width. If the default focus is set to **group**, this steps the group. |
| NIL | {dfocus gL dnexti} | Steps lockstep threads in the group. This steps all threads in the share group that are at the same PC as the thread of interest one instruction. Other threads in the control group run freely. |

| Alias | Definition | Description |
|---|---|---|
| niw | {dfocus W dnexti} | Steps worker threads in the process. This steps the thread of interest one instruction, and runs all worker threads in the process to the same (goal) statement. The nonworker threads in the process run freely.<br>This alias does not force process width. If the default focus is set to **group**, this steps the group. |
| NIW | {dfocus gW dnexti} | Steps worker threads in the group. This steps the thread of interest one instruction, and runs all worker threads in the same share group to the same statement. All other threads in the control group run freely. |

*Examples:*

`dnexti` Steps one machine-level instruction.

`ni 10` Steps ten machine-level instructions.

`NI` Steps one instruction and runs all other processes in the group that were executing at that instruction to the next instruction.

`f t n` Steps the thread one machine-level instruction.

`dfocus 3. dnexti`
Steps process 3 one machine-level instruction.

## dout

Executes until just after the place that called the current routine

*Format*: **dout** [ *frame-count* ]

*Arguments*: *frame-count* An integer that specifies that the thread returns out of this many levels of subroutine calls. If you omit this number, the thread returns from the current level.

*Description*: The **dout** command runs a thread until it returns from either of the following:

- The current subroutine.
- One or more nested subroutines.

When you specify process width, TotalView allows all threads in the process that are not running to this goal to run free. (Specifying process width is the default.)

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| ou | dout | Runs the thread of interest out of the current function, while allowing other threads in the process to run. |
| OU | {dfocus g dout} | Searches for threads in the share group that are at the same PC as the thread of interest, and runs one such aligned thread in each member out of the current function. The rest of the control group runs freely. This is a group stepping command. |
| oul | {dfocus L dout} | Runs the process threads in lockstep. This runs the thread of interest out of the current function, and also runs all threads in the process that are at the same PC as the thread of interest out of the current function. Other threads in the process run freely. The group of threads that is at the same PC is called the *lockstep group*.<br>This alias does not force process width. If the default focus is set to **group**, this steps the group. |
| OUL | {dfocus gL dout} | Runs lockstep threads in the group. This runs all threads in the share group that are at the same PC as the thread of interest out of the current function. Other threads in the control group run freely. |

| Alias | Definition | Description |
|---|---|---|
| ouw | {dfocus W dout} | Runs worker threads in the process. This runs the thread of interest out of the current function and runs all worker threads in the process to the same (goal) statement. The nonworker threads in the process run freely.<br>This alias does not force process width. If the default focus is set to **group**, this steps the group. |
| OUW | {dfocus gW dout} | Runs worker threads in the group. This runs the thread of interest out of the current function and also runs all worker threads in the same share group out of the current function. All other threads in the control group run freely. |

For additional information on the different kinds of stepping, see the **dstep** on page 91 command information.

*Examples:*

| | |
|---|---|
| `f t ou` | Runs the current thread of interest out of the current subroutine. |
| `f p dout 3` | Unwinds the process in the current focus out of the current subroutine to the routine three levels above it in the call stack. |

## dprint

Evaluates and displays information

*Format*: Prints the value of a variable

**dprint** [ **–nowait** ] *variable*

Prints the value of an expression

**dprint** [ **–nowait** ] *expression*

*Arguments*:

| | |
|---|---|
| **–nowait** | Tells TotalView to evaluate the expression in the background. You need to use **TV::expr** to obtain the results, as they are not displayed. |
| *variable* | A variable whose value is displayed. The variable can be local to the current stack frame or it can be global. If the variable being displayed is an array, you can qualify the variable's name with a slice that tells the CLI to display a portion of the array, |
| *expression* | A source-language expression to evaluate and print. Because *expression* must also conform to Tcl syntax, you must enclose it within quotation marks it if it includes any blanks, and in braces (**{}**) if it includes brackets (**[ ]**), dollar signs (**$**), quotation marks (**"**), or other Tcl special characters. |

*Description*: The **dprint** command evaluates and displays a variable or an expression. The CLI interprets the expression by looking up the values associated with each symbol and applying the operators. The result of an expression can be a scalar value or an aggregate (array, array slice, or structure).

If an event such as a **$stop**, SEGV, breakpoint occurs, the **dprint** command throws an exception that describes the event. The first exception subcode returned by **TV::errorCodes** is the *susp-eval-id* (a suspension-evaluation-ID). You can use this to manipulate suspended evaluations with the **dflush** and **TV::expr** commands.

If you use the **–nowait** option, TotalView evaluates the expression in the background. It also returns a *susp-eval-id* that you can use to obtain the results of the evaluation.

As the CLI displays data, it passes the data through a simple *more* processor that prompts you after it displays each screen of text. At this time, you can press the Enter key to tell the CLI to continue displaying information. Entering **q** tells the CLI to stop printing this information.

Since the **dprint** command can generate a considerable amount of output, you might want to use the **capture** command described on page 18 to save the output to a variable.

Structure output appears with one field printed per line; for example:

```
sbfo = {
   f3 = 0x03 (3)
   f4 = 0x04 (4)
   f5 = 0x05 (5)
   f20 = 0x000014 (20)
   f32 = 0x00000020 (32)
}
```

Arrays print in a similar manner; for example:

```
foo = {
   [0][0] = 0x00000000 (0)
   [0][1] = 0x00000004 (4)
   [1][0] = 0x00000001 (1)
   [1][1] = 0x00000005 (5)
   [2][0] = 0x00000002 (2)
   [2][1] = 0x00000006 (6)
   [3][0] = 0x00000003 (3)
   [3][1] = 0x00000007 (7)
}
```

You can append a slice to the variable's name to tell the CLI to display a portion of an array; for example:

```
d.1<> p {master_array[::10]}
  master_array(::10) = {
   (1) = 1 (0x00000001)
   (11) = 1331 (0x00000533)
   (21) = 9261 (0x0000242d)
   (31) = 29791 (0x0000745f)
   (41) = 68921 (0x00010d39)
   (51) = 132651 (0x0002062b)
   (61) = 226981 (0x000376a5)
   (71) = 357911 (0x00057617)
   (81) = 531441 (0x00081bf1)
   (91) = 753571 (0x000b7fa3)
}
```

The slice is placed within **{}** symbols. This prevents Tcl from trying to evaluate the information in the bracket (**[]**) characters. As an alternative, you can escape the brackets; for example, **\[ \]**.

The CLI evaluates the expression or variable in the context of each thread in the target focus. Thus, the overall format of **dprint** output is as follows:

```
first process or thread:
   expression result

second process or thread:
   expression result

...

last process or thread:
   expression result
```

TotalView lets you cast variables and cast a variable to an array. If you are casting a variable, the first array address is the address of the variable. For example, assume the following declaration:

```
float bint;
```

The following statement displays the variable as an array of one integer:

```
dprint {(int \[1\])bint:
```

If the expression is a pointer, the first addresses is the value of the pointer. Here is an array declaration:

```
float bing[2], *bp = bint;
```

TotalView assumes the first array address is the address of what **bp** is pointing to. So, the following command displays the array:

```
dprint {(int \[2\])bp}
```

You can also use the **dprint** command to obtain values for your computer's registers. For example, on most architectures, **$r1** is register 1. To obtain the contents of this register, type:

```
dprint \$r1
```

You must precede the dollar sign (**$**) with a backslash to escape it since the register's name includes the **$**. This **$** is not the standard indicator that tells Tcl to fetch a variable's value. Chapter 10, *"Architectures,"* on page 239 lists the mnemonic names assigned to registers.

*Do not use a $ when asking the* **dprint** *command to display your program's variables.*

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| p | dprint | Evaluates and displays information |

*Examples:*

`dprint scalar_y`
Displays the values of variable **scalar_y** in all processes and threads in the current focus.

`p argc`
Displays the value of **argc**.

`p argv`
Displays the value of **argv**, along with the first string to which it points.

`p {argv[argc-1]}`
Prints the value of **argv[argc-1]**. If the execution point is in **main()**, this is the last argument passed to **main()**.

`dfocus p1 dprint scalar_y`
Displays the values of variable **scalar_y** for the threads in process 1.

`f 1.2 p array`**x**
Displays the values of the array **arrayx** for the second thread in process 1.

`for {set i 0} {$i < 100} {incr i} {p argv\[$i\]}`

If **main()** is in the current scope, prints the program's arguments followed by the program's environment strings.

`f {t1.1 t2.1 t3.1} dprint {f()}`

Evaluates a function contained in three threads. Each thread is in a different process:

```
Thread 1.1:
f(): 2
Thread 2.1:
f(): 3
Thread 3.1:
f(): 5
```

`f {t1.1 t2.1 t3.1} dprint -nowait {f()}`

**1**

Evaluates a function without waiting. Later, you can obtain the results using **TV::expr**. The number displayed immediately after the command, which is "1", is the *susp-eval-id*. The following example shows how to get this result:

```
f t1.1 TV::expr get 1 result
2
f t2.1 TV::expr get 1 result
Thread 1.1:
f(): 2
Thread 2.1:
f(): 3
Thread 3.1:
f(): 5
3
f t3.1 TV::expr get 1 result
5
```

## dptsets

Shows the status of processes and threads

*Format*: **dptsets** [ *ptset_array* ] ...

*Arguments*:

*ptset_array* An optional array that indicates the P/T sets to show. An element of the array can be a number or it can be a more complicated P/T expression. (For more information, see "*Using P/T Set Operators*" in Chapter 11 of the *TotalView Users Guide*.)

*Description*: The **dptsets** command shows the status of each process and thread in a Tcl array of P/T expressions. These array elements are P/T expressions (see Chapter 11 of the *TotalView Users Guide*), and the elements' array indices are strings that label each element's section in the output.

If you do not use the optional *ptset_array* argument, the CLI supplies a default array that contains all P/T set designators: **error**, **existent**, **held**, **running**, **stopped**, **unheld**, and **watchpoint**.

*Examples*: The following example displays information about processes and threads in the current focus:

```
d.1<> dptsets
unheld:
1:     808694   Stopped [fork_loopSGI]
  1.1: 808694.1 Stopped PC=0x0d9cae64
  1.2: 808694.2 Stopped PC=0x0d9cae64
  1.3: 808694.3 Stopped PC=0x0d9cae64
  1.4: 808694.4 Stopped PC=0x0d9cae64

existent:
1:     808694   Stopped [fork_loopSGI]
  1.1: 808694.1 Stopped PC=0x0d9cae64
  1.2: 808694.2 Stopped PC=0x0d9cae64
  1.3: 808694.3 Stopped PC=0x0d9cae64
  1.4: 808694.4 Stopped PC=0x0d9cae64

watchpoint:

running:

held:

error:

stopped:
1:     808694   Stopped [fork_loopSGI]
  1.1: 808694.1 Stopped PC=0x0d9cae64
  1.2: 808694.2 Stopped PC=0x0d9cae64
  1.3: 808694.3 Stopped PC=0x0d9cae64
  1.4: 808694.4 Stopped PC=0x0d9cae64
...
```

The following example creates a two-element P/T set array, and then displays the results. Notice the labels in this example.

```
d1.<> set set_info(0) breakpoint(1)
breakpoint(1)
d1.<> set set_info(1) stopped(1)
stopped(1)
d1.<> dptsets set_info
0:
1:     892484   Breakpoint  [arraySGI]
  1.1: 892484.1 Breakpoint  PC=0x10001544, [array.F#81]

1:
1:     892484   Breakpoint  [arraySGI]
  1.1: 892484.1 Breakpoint  PC=0x10001544, [array.F#81]
```

The array index to **set_info** becomes a label identifying the type of information being displayed. In contrast, the information within parentheses in the **breakpoint** and **stopped** functions identifies the arena for which the function returns information.

If you use a number as an array index, you might not remember what is being printed. The following very similar example shows a better way to use these array indices:

```
d1.<> set set_info(my_breakpoints) breakpoint(1)
breakpoint(1)
d1.<> set set_info(my_stopped) stopped(1)
stopped(1)
d1.<> dptsets set_info
my_stopped:
1:     882547   Breakpoint  [arraysSGI]
  1.1: 882547.1 Breakpoint  PC=0x10001544,
[arrays.F#81]

my_breakpoints:
1:     882547   Breakpoint  [arraysSGI]
  1.1: 882547.1 Breakpoint  PC=0x10001544,
[arrays.F#81]
```

The following commands also create a two-element array. This example differs in that the second element is the difference between three P/T sets.

```
d.1<> set mystat(system) a-gW
d.1<> set mystat(reallystopped) \
      stopped(a)-breakpoint(a)-watchpoint(a)
d.1<> dptsets t mystat
system:
Threads in process 1 [regress/fork_loop]:
1.-1:  21587.[-1] Running PC=0x3ff805c6998
1.-2:  21587.[-2] Running PC=0x3ff805c669c
...
Threads in process 2 [regress/fork_loop.1]:
2.-1:  15224.[-1] Stopped PC=0x3ff805c6998
2.-2:  15224.[-2] Stopped PC=0x3ff805c669c
...
```

```
reallystopped:
2.2    224.2 Stopped PC=0x3ff800d5758
2.-1   5224.[-1] Stopped PC=0x3ff805c6998
2.-2:  15224.[-2] Stopped PC=0x3ff805c669c
...
```

## drerun

Restarts processes

*Format:* **drerun** [ *cmd_args* ] [ *in_operation* ]
[ *out_operations* ]
[ *error_operations* ]

*Arguments:*

*cmd_args* — The arguments to be used for restarting a process.

*in_operation* — Names the file from which the CLI reads input.

- < *infile* — Reads from *infile* instead of **stdin**. *infile* indicates a file from which the launched process reads information.

*out_operations* — Names the file to which the CLI writes output. In the following, *outfile* indicates the file into which the launched processes writes information.

- > *outfile* — Sends output to *outfile* instead of **stdout**.
- >& *outfile* — Sends output and error messages to *outfile* instead of **stdout** and **stderr**.
- >>& *outfile* — Appends output and error messages to *outfile*.
- >> *outfile* — Appends output to *outfile*.

*error_operations* — Names the file to which the CLI writes error output. In the following, *errfile* indicates the file into which the launched processes writes error information.

- 2> *errfile* — Sends error messages to *errfile* instead of **stderr**.
- 2>>*errfile* — Appends error messages to *errfile*.

*Description:* The **drerun** command restarts the process that is in the current focus set from its beginning. The **drerun** command uses the arguments stored in the **ARGS(dpid)** and **ARGS_DEFAULT** variables. These are set every time you run the process with different arguments. Consequently, if you do not specify the arguments that the CLI uses when restarting the process, it uses the arguments you used when the CLI previously ran the process. (See **drun** on page 86 for more information.)

The **dererun** command differs from the **drun** command in that:

- If you do not specify an argument, the **drerun** command uses the default values. In contrast, the **drun** command clears the argument list for the program. This means that you cannot use an empty argument list with the **drerun** command to tell the CLI to restart a process and expect that it does not use any arguments.
- If the process already exists, the **drun** command does not restart it. (If you must use the **drun** command, you must first kill the process.) In contrast, the **drerun** command kills and then restarts the process.

The arguments to this command are similar to the arguments used in the Bourne shell.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| rr | {drerun} | Restarts processes |

*Examples:*

`drerun`
Reruns the current process. Because it doesn't use arguments, the process restarts using its previous values.

`rr -firstArg an_argument -aSecondArg a_second_argument`
Reruns the current process. The CLI does not use the process's default arguments because replacement arguments exist.

## drestart

Restarts a checkpoint (IBM and SGI only)

*Format:* Restarts a checkpoint on IBM AIX

**drestart** [ **–halt** ] [ **–g** *gid* ] [ **–r** *host* ] [ **–no_same_hosts** ]

Restarts a checkpoint on SGI IRIX

**drestart** [ *process-state* ] [ **–no_unpark** ] [ **–g** *gid* ] [ **–r** *host* ]
[ **–ask_attach_parallel** | **–no_attach_parallel** ]
[ **–no_preserve_ids** ] *checkpoint-name*

*Arguments:*

*process_state* Defines the state of the process both before and after the checkpoint. If you do not specify a process state, parallel processes are held immediately after the place where the checkpoint occurred. The CLI attaches to these created parallel processes. You can use one of the following options:

- **–detach** (SGI only) Although TotalView starts checkpointed processes, it does not attach to them.
- **–go** (SGI only) TotalView starts checkpointed parallel processes and attaches to them.
- **–halt** TotalView stops checkpointed processes after it restarts them.

**–no_unpark** (SGI only) Indicates that the checkpoint was created outside of TotalView or that you used the **dcheckpoint** command's **–no_park** option when you created the checkpoint file.

**–g** *gid* Names the control group into which TotalView places all created processes.

**–r** *host* Names the remote host upon which the restart occurs.

**–ask_attach_parallel** (SGI only) Asks if the CLI automatically attaches to the parallel processes being created. This is most often used in procedures.

**–no_attach_parallel** (SGI only) Attach only to the base process. That is, the CLI does not attach to the parallel processes being created.

**–no_preserve_ids** (SGI only) Use new IDs after it restarts the processes. If you omit this option, TotalView causes the process to use the same process, group, session, or **ash** IDs after it restarts.

**–no_same_hosts** (IBM only) Restart can use any available hosts. If you do not use this option, the restart occurs on the same hosts upon which the program was executing when the checkpoint file was made. If these hosts are not available, the restart operation fails.

*checkpoint-name* The file name used when the checkpoint file was saved.

*Description:* The **drestart** command restores and restarts all of the checkpointed processes. By default, the CLI attaches to the base process. You have the following choices, among others:

- If there are parallel processes related to this base process, TotalView attaches to them.
- If you do not want the CLI to automatically attach to these parallel processes, use the **–no_attach_parallel** option.
- If you do not know if there are parallel processes, if you want the user to decide, or if you are using this command in a Tcl procedure, use the **–ask_parallel_process** option.

### Restarting on AIX using LoadLeveler

On the RS/6000, if you want to debug a **LoadLeveler poe** job from the point at which the checkpoint was made, you must resubmit the program as a **LoadLeveler** job to restart the checkpoint. You also need to set the **MP_POE_RESTART_SLEEP** environment variable to an appropriate number of seconds. After you restart **poe**, start TotalView and attach to **poe**.

*When attaching to* **poe**, *parallel tasks are not yet created, so do not try to attach to any of them. Also, use the* **–no_attach_parallel** *option when using the* **dattach** *command.*

You cannot restart the checkpoint using the **drestart** command. **poe** will tell TotalView when it is time to attach to the parallel task so that it can complete the restart operation.

*Examples:*

`drestart check1`

Restarts the processes checkpointed in the **check1** file. The CLI automatically attaches to parallel processes. This is an SGI checkpoint because it specifies a name.

`drestart -no_unpark check1`

Restarts the processes checkpointed in the **check1** file. This file was either created outside of TotalView or it was created using the **–no_park** option. This is an SGI checkpoint because it specifies a name.

# drun

Starts or restarts processes

*Format:* **drun** [ *cmd_arguments* ] [ *in_operation infile* ]
[ *out_operations outfile* ]
[ *error_operations errfile* ]

*Arguments:*

*cmd_arguments* — The argument list passed to the process.

*in_operation* — Names the file from which the CLI reads input.

- < *infile* — Reads from *infile* instead of **stdin**. *infile* indicates a file from which the launched process reads information.

*out_operations* — Names the file to which the CLI writes output. In the following, *outfile* indicates the file into which the launched processes writes information.

- > *outfile* — Sends output to *outfile* instead of **stdout**.
- >& *outfile* — Sends output and error messages to *outfile* instead of **stdout** and **stderr**.
- >>& *outfile* — Appends output and error messages to *outfile*.
- >> *outfile* — Appends output to *outfile*.

*error_operations* — Names the file to which the CLI writes error output. In the following, *errfile* indicates the file into which the launched processes writes error information.

- 2> *errfile* — Sends error messages to *errfile* instead of **stderr**.
- 2>>*errfile*

*Description:* The **drun** command launches each process in the current focus and starts it running. The CLI passes the command arguments to the processes. You can also indicate I/O redirection for input and output information. Later in the session, you can use the **drerun** command to restart the program.

The arguments to this command are similar to the arguments used in the Bourne shell.

In addition, the CLI uses the following variables to hold the default argument list for each process:

**ARGS_DEFAULT** — The CLI sets this variable if you use the **–a** command-line *option* when you started the CLI or TotalView. (This option passes command-line arguments that TotalView uses when it invokes a process.) This variable holds the default arguments that TotalView passes to a process when the process has no default arguments of its own.

**ARGS(dpid)** — An array variable that contains the command-line arguments. The index *dpid* is the process ID. This variable holds a process's default arguments. It is always set by the **drun** command, and it also contains any arguments you used when executing a **drerun** command.

If more than one process is launched with a single **drun** command, each receives the same command-line arguments.

In addition to setting these variables by using the **–a** *command-line* option or specifying *cmd_arguments* when you use this or the **drerun** command, you can modify these variables directly with the **dset** and **dunset** commands.

You can only use this command to tell TotalView to execute initial processes, because TotalView cannot directly run processes that your program spawns. When you enter this command, the initial process must have terminated; if it was not terminated, you are told to kill it and retry. (You could, use the **drerun** command instead because the **drerun** commands first kills the process.)

The first time you use the **drun** command, TotalView copies arguments to program variables. It also sets up any requested I/O redirection. If you re-enter this command for processes that TotalVIew previously started—or use it when you use the **dattach** command to attach to a process—the CLI reinitializes your program.



### Issues With Using IBM poe

Both **poe** and the CLI can interfere with one another because each believes that it owns **stdin**. Because **poe** is trying to manage **stdin** on behalf of your processes, it continually reads from **stdin**, acquiring all characters that it sees. This means that the CLI never sees these characters. If your target process does not use **stdin**, you can use the **–stdinmode none** option. Unfortunately, this option is incompatible with **poe –cmdfile** option that is used when specifying **–pgmmodel mpmd**.

If you encounter these problems, redirect **stdin** within the CLI; for example:

```
drun < in.txt
```

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| r | drun | Starts or restarts processes |

*Examples*:

`drun`
Tells the CLI to begin executing processes represented in the current focus.

`f {p2 p3} drun`
Begins execution of processes 2 and 3.

`f 4.2 r`
Begins execution of process 4. This is the same as **f 4 drun**.

`dfocus a drun`
Restarts execution of all processes known to the CLI. If they were not previously killed, you are told to use the **dkill** command and then try again.

`drun < in.txt`
Restarts execution of all processes in the current focus, setting them up to get standard input from **in.txt** file.

## dset

Changes or views CLI variables

*Format*: Changes a CLI variable

**dset** *debugger-var value*

Views current CLI variables

**dset** [ *debugger-var* ]

Sets the default for a CLI variable

**dset –set_as_default** *debugger-var value*

*Arguments*:

| | |
|---|---|
| *debugger-var* | Name of a CLI variable. |
| *value* | Value to be assigned to *debugger-var*. |
| **–set_as_default** | Sets the value to use as the variable's default. This option is most often used by system administrators to set site-specific defaults in the global **.tvdrc** startup script. Values set using this option replace the CLI built-in default. |

*Description*: The **dset** command sets the value of CLI debugger variables. CLI and TotalView variables are described in Chapter 4, "*TotalView Variables*," on page 159.

If you type use the **dset** command with no arguments, the CLI displays the names and current values for all TotalView CLI variables in the global namespace. If you use only one argument, the CLI returns and displays that variable's value.

The second argument defines the value that replaces a variable's previous value. You must enclose it in quotation marks if it contains more than one word.

If you do not use an argument, the CLI only displays variables in the current namespace. To show all variables in a namespace, enter the namespace name immediately followed by a double colon; for example, **TV::**.

You can use an asterisk (*) as a wildcard character to tell the CLI to match more than one string; for example, **TV::g*** matches all variables in the **TV::** namespace beginning with **g**. For example, to view all variables in the **TV::** namespace, enter the following:

```
dset TV::
```

or:

```
dset TV::GUI::
```

You need to type the double colons at the end of this example when obtaining listings for a namespace. If you omit them, Tcl assumes that you are requesting information on a variable. For example, **dset TV::GUI** looks for a variable named GUI in the **TV** namespace.

*Examples*:

| | |
|---|---|
| `dset PROMPT "Fixme% "` | Sets the prompt to **Fixme%** followed by a space. |
| `dset *` | Displays all CLI variables and their current settings. |

`dset VERBOSE` Displays the current setting for output verbosity.

`dset EXECUTABLE_PATH ../test_dir;$EXECUTABLE_PATH`
Places **../test_dir** at the beginning of the previous value for the executable path.

```
dset -set_as_default TV::server_launch_string \
   {/use/this/one/tvdsvr}
```
Sets the default value of the **TV::server_launch_string**. If you change this value, you can later select the **Defaults** button within the **File > Preferences Launch String Page** to reset it to this value.

`dset TV::GUI::fixed_font_size 12`
Sets the TotalView GUI to display information using a 12-point, fixed-width font. Commands such as this are often found in a startup file.

## dstatus

Shows current status of processes and threads

*Format*: dstatus

*Arguments*: This command has no arguments

*Description*: The **dstatus** command prints information about the current state of each process and thread in the current focus.

If you have not changed the focus, the default width is process. In this case, the **dstatus** command shows the status for each thread in process 1. In contrast, if you set the focus to **g1.<**, the CLI displays the status for every thread in the control group that contains process 1.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| st | dstatus | Shows current status |
| ST | {dfocus g dstatus} | Shows group status |

*Examples*:

`dstatus`

Displays the status of all processes and threads in the current focus; for example:

```
1:     42898    Breakpoint  [arraysAIX]
  1.1: 42898.1  Breakpoint  \
                PC=0x100006a0, [./arrays.F#87]
```

`f a st`

Displays the status for all threads in all processes.

`f p1 st`

Displays the status of the threads associated with process 1. If the focus is at its default (**d1.<**), this is the same as typing **st**.

`ST`

Displays the status of all processes and threads in the control group having the focus process; for example:

```
1:     773686    Stopped  [fork_loop_64]
  1.1: 773686.1  Stopped  PC=0x0d9cae64
  1.2: 773686.2  Stopped  PC=0x0d9cae64
  1.3: 773686.3  Stopped  PC=0x0d9cae64
  1.4: 773686.4  Stopped  PC=0x0d9cae64
2:     779490    Stopped  [fork_loop_64.1]
  2.1: 779490.1  Stopped  PC=0x0d9cae64
  2.2: 779490.2  Stopped  PC=0x0d9cae64
  2.3: 779490.3  Stopped  PC=0x0d9cae64
  2.4: 779490.4  Stopped  PC=0x0d9cae64
```

`f W st`

Shows status for all worker threads in the focus set. If the focus is set to **d1.<**, the CLI shows the status of each worker thread in process 1.

`f W ST`

Shows status for all worker threads in the control group associated with the current focus.

In this case, TotalView merges the **W** and **g** specifiers in the **ST** alias. The result is the same as if you had entered **f gW st**.

`f L ST`

Shows status for every thread in the share group that is at the same PC as the thread of interest.

## dstep

Steps lines, stepping into subfunctions

*Format:* **dstep** [ *num-steps* ]

*Arguments:*

| | |
|---|---|
| *num-steps* | An integer greater than 0, indicating the number of source lines to execute. |

*Description:* The **dstep** command executes source lines; that is, it advances the program by steps (source lines). If a statement in a source line invokes a subfunction, the **dstep** command steps into the function.

The optional *num-steps* argument tells the CLI how many **dstep** operations to perform. If you do not specify *num-steps*, the default is 1.

The **dstep** command iterates over the arenas in the focus set by doing a thread-level, process-level, or group-level step in each arena, depending on the width of the arena. The default width is **process** (**p**).

If the width is **process**, the **dstep** command affects the entire process that contains the thread being stepped. Thus, although the CLI is only stepping one thread, all other threads in the same process also resume executing. In contrast, the **dfocus t dstep** command tells the CLI that to only step the *thread of interest*.

*On systems having identifiable manager threads, the* **dfocus t dstep** *command allows the manager threads as well as the thread of interest to run.*

The action taken on each term in the focus list depends on whether its width is thread, process, or group, and on the group specified in the current focus. (If you do not explicitly specify a group, the default is the control group.)

If some thread hits an action point other than the goal breakpoint during a step operation, that ends the step.

### Group Width

The behavior depends on the group specified in the arena:

| | |
|---|---|
| Process group | TotalView examines that group and identifies each process having a thread stopped at the same location as the thread of interest. TotalView selects one matching thread from each matching process. TotalView then runs all processes in the group and waits until the thread of interest arrives at its goal location; each selected thread also arrives there. |
| Thread group | The behavior is similar to process width behavior except that all processes in the program control group run, rather than just the process of interest. Regardless of which threads are in the group of interest, TotalView only waits for threads that are in the same share group as the thread of interest. This is because it is not useful to run threads executing in different images to the same goal. |

### Process Width (default)

The behavior depends on the group specified in the arena. Process width is the default.

**Process group** TotalView allows the entire process to run, and execution continues until the thread of interest arrives at its goal location. TotalView plants a temporary breakpoint at the goal location while this command executes. If another thread reaches this goal breakpoint first, your program continues to execute until the thread of interest reaches the goal.

**Thread group** TotalView runs all threads in the process that are in that group to the same goal as the thread of interest. If a thread arrives at the goal that is not in the group of interest, this thread also stops there. The group of interest specifies the set of threads for which TotalView waits. This means that the command does not complete until all threads in the group of interest are at the goal.

### Thread Width

Only the thread of interest is allowed to run. (This is not supported on all systems.)

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| s | dstep | Runs the thread of interest one statement, while allowing other threads in the process to run. |
| S | {dfocus g dstep} | Searches for threads in the share group that are at the same PC as the thread of interest, and steps one such aligned thread in each member one statement. The rest of the control group runs freely. This is a group stepping command. |
| sl | {dfocus L dstep} | Steps the process threads in lockstep. This steps the thread of interest one statement, and runs all threads in the process that are at the same PC as the thread of interest to the same (goal) statement. Other threads in the process run freely. The group of threads that is at the same PC is called the *lockstep group*. This alias does not force process width. If the default focus is set to **group**, this steps the group. |

| Alias | Definition | Description |
|---|---|---|
| SL | {dfocus gL dstep} | Steps lockstep threads in the group. This steps all threads in the share group that are at the same PC as the thread of interest one statement. Other threads in the control group run freely. |
| sw | {dfocus W dstep} | Steps worker threads in the process. This steps the thread of interest one statement, and runs all worker threads in the process to the same (goal) statement. The nonworker threads in the process run freely. This alias does not force process width. If the default focus is set to **group**, this steps the group. |
| SW | {dfocus gW dstep} | Steps worker threads in the group. This steps the thread of interest one statement, and runs all worker threads in the same share group to the same (goal) statement. All other threads in the control group run freely. |

*Examples:*

| | |
|---|---|
| `dstep` | Executes the next source line, stepping into any procedure call it encounters. Although the CLI only steps the current thread, other threads in the process run. |
| `s 15` | Executes the next 15 source lines. |
| `f p1.2 dstep` | Steps thread 2 in process 1 by one source line. This also resumes execution of all threads in process 1; they halt as soon as thread 2 in process 1 executes its statement. |
| `f t1.2 s` | Steps thread 2 in process 1 by one source line. No other threads in process 1 execute. |

## dstepi

Steps machine instructions, stepping into subfunctions

*Format:* **dstepi** [ *num-steps* ]

*Arguments:*

| | |
|---|---|
| *num-steps* | An integer greater than 0, indicating the number of instructions to execute. |

*Description:* The **dstepi** command executes assembler instruction lines; that is, it advances the program by single instructions.

The optional *num-steps* argument tells the CLI how many **dstepi** operations to perform. If you do not specify *num-steps*, the default is 1.

For more information, see **dstep** on page 91.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| si | dstepi | Runs the thread of interest one instruction while allowing other threads in the process to run. |
| SI | {dfocus g dstepi} | Searches for threads in the share group that are at the same PC as the thread of interest, and steps one such aligned thread in each member one instruction. The rest of the control group runs freely. This is a group stepping command. |
| sil | {dfocus L dstepi} | Steps the process threads in lockstep. This steps the thread of interest one instruction, and runs all threads in the process that are at the same PC as the thread of interest to the same instruction. Other threads in the process run freely. The group of threads that is at the same PC is called the *lockstep group*.<br>This alias does not force process width. If the default focus is set to **group**, this steps the group. |
| SIL | {dfocus gL dstepi} | Steps lockstep threads in the group. This steps all threads in the share group that are at the same PC as the thread of interest one instruction. Other threads in the control group run freely. |

| Alias | Definition | Description |
|---|---|---|
| siw | {dfocus W dstepi} | Steps worker threads in the process. This steps the thread of interest one instruction, and runs all worker threads in the process to the same (goal) statement. The nonworker threads in the process run freely.<br>This alias does not force process width. If the default focus is set to **group**, this steps the group. |
| SIW | {dfocus gW dstepi} | Steps worker threads in the group. This steps the thread of interest one instruction, and runs all worker threads in the same share group to the same statement. All other threads in the control group run freely. |

*Examples:*

| | |
|---|---|
| `dstepi` | Executes the next machine instruction, stepping into any procedure call it encounters. Although the CLI only steps the current thread, other threads in the process run. |
| `si 15` | Executes the next 15 instructions. |
| `f p1.2 dstepi` | Steps thread 2 in process 1 by one instruction, and resumes execution of all other threads in process 1; they halt as soon as thread 2 in process 1 executes its instruction. |
| `f t1.2 si` | Steps thread 2 in process 1 by one instruction. No other threads in process 1 execute. |

## dunhold

Releases a held process or thread

*Format*: Releases a process

**dunhold –process**

Releases a thread

**dunhold –thread**

*Arguments*:

**–process** Tells TotalView to release processes in the current focus. You can abbreviate the **–process** option argument to **–p**.

**–thread** Tells TotalView to release threads in the current focus. You can abbreviate the **–thread** option to **–t**.

*Description*: The **dunhold** command releases the threads or processes in the current focus. You cannot hold or release system manager threads.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| uhp | {dfocus p dunhold -process} | Releases the process of interest |
| UHP | {dfocus g dunhold -process} | Releases the processes in the focus group |
| uht | {dfocus t dunhold –thread} | Releases the thread of interest |
| UHT | {dfocus g dunhold –thread} | Releases all threads in the focus group |
| uhtp | {dfocus p dunhold –thread} | Releases the threads in the current process |

*Examples*:

`f w uhtp` Releases all worker threads in the focus process.

`htp; uht` Holds all threads in the focus process except the thread of interest.

## dunset

Restores default settings for variables

*Format*: Restores a CLI variable to its default value

**dunset** *debugger-var*

Restores all CLI variables to their default values

**dunset –all**

*Arguments*:

| | |
|---|---|
| *debugger-var* | Name of the CLI variable whose default setting is being restored. |
| **–all** | Restores the default settings of all CLI variables. |

*Description*: The **dunset** command reverses the effects of any previous **dset** commands, restoring CLI variables to their default settings. See Chapter 4, "*TotalView Variables*," on page 159 for information on these variables.

Tcl variables (those created with the Tcl **set** command) are not affected by this command.

If you use the **–all** option, the **dunset** command affects all changed CLI variables, restoring them to the settings that existed when the CLI session began. Similarly, specifying *debugger-var* tells the CLI to restore that one variable.

*Examples*:

| | |
|---|---|
| `dunset PROMPT` | Restores the prompt string to its default setting; that is, **{[dfocus]>}**. |
| `dunset -all` | Restores all CLI variables to their default settings. |

## duntil

Runs the process until a target place is reached

*Format*: Runs to a line

**duntil** *line-number*

Runs to an address

**duntil –address** *addr*

Runs into a function

**duntil** *proc-name*

*Arguments*:

| | |
|---|---|
| *line-number* | A line number in your program. |
| **–address** *addr* | An address in your program. |
| *proc-name* | The name of a procedure, function, or subroutine in your program. |

*Description*: The **duntil** command runs the thread of interest until execution reaches a line or absolute address, or until it enters a function.

If you use a process or group width, all threads in the process or group that are not running to the goal are allowed to run. If one of the secondary threads arrives at the goal before the thread of interest, the thread continues running, ignoring this goal. In contrast, if you specify thread width, only the thread of interest runs.

The **duntil** command differs from other step commands when you apply it to a group, as follows:

| | |
|---|---|
| Process group | TotalView runs the entire group, and the CLI waits until all processes in the group have at least one thread that has arrived at the goal breakpoint. This lets you *sync* up all the processes in a group in preparation for group-stepping them. |
| Thread group | TotalView runs the process (for **p** width) or the control group (for **g** width) and waits until all the running threads in the group of interest arrive at the goal. |

There are some differences between how processes and threads run using the **duntil** command and other stepping commands. Here is how this command determines what it runs:

- **Process Group Operation**: TotalView examines the thread of interest to see if it is already at the goal. If it is, TotalView does not run the process of interest. Similarly, TotalView examines all other processes in the share group, and it only runs processes that do not have a thread at the goal. It also runs members of the control group that are not in the share group.
- **Group-Width Thread Group Operation**: TotalView identifies all threads in the entire control group that are not at the goal. Only those threads run. Although TotalView runs share group members in which all worker threads are already at the goal, it does not run the workers. TotalView also runs processes in the control group that are outside the

share group. The **duntil** command operation ends when all members of the focus thread group are at the goal.

- **Process-Width Thread Group Operation**: TotalView identifies all threads in the entire focus process that are not already at the goal. Only those threads run. The **duntil** command operation ends when all threads in the process that are also members of the focus group arrive at the goal.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| un | duntil | Runs the thread of interest until it reaches a target, while allowing other threads in the process to run. |
| UN | {dfocus g duntil} | Runs the entire control group until every process in the share group has at least one thread at the goal. Processes that have a thread at the goal do not run. |
| unl | {dfocus L duntil} | Runs the thread of interest until it reaches the target, and runs all threads in the process that are at the same PC as the thread of interest to the same target. Other threads in the process run freely. The group of threads that is at the same PC is called the *lockstep group*.<br>This does not force process width. If the default focus is set to **group**, this runs the group. |
| UNL | {dfocus gL duntil} | Runs lockstep threads in the share group until they reach the target. Other threads in the control group run freely. |
| unw | {dfocus W duntil} | Runs worker threads in the process to a target. The nonworker threads in the process run freely.<br>This does not force process width. If the default focus is set to **group**, this runs the group. |
| UNW | {dfocus gW duntil} | Runs worker threads in the same share group to a target. All other threads in the control group run freely. |

*Examples:*

| | |
|---|---|
| `UNW 580` | Runs all worker threads to line 580. |
| `un buggy_subr` | Runs to the start of the **buggy_subr** routine. |

## dup

Moves up the call stack

*Format*: **dup** [ *num-levels* ]

*Arguments*: *num-levels* Number of levels to move up. The default is **1**.

*Description*: The **dup** command moves the current stack frame up one or more levels. It also prints the new frame number and function.

Call stack movements are all relative, so **dup** effectively "moves up" in the call stack. ("Up" is in the direction of **main()**.)

Frame 0 is the most recent—that is, currently executing—frame in the call stack; frame 1 corresponds to the procedure that invoked the currently executing frame, and so on. The call stack's depth is increased by one each time a your program enters a procedure, and decreases by one when your program exits from it. The effect of the **dup** command is to change the context of commands that follow. For example, moving up one level lets you access variables that are local to the procedure that called the current routine.

Each **dup** command updates the frame location by adding the appropriate number of levels.

The **dup** command also modifies the current list location to be the current execution location for the new frame, so a subsequent the **dlist** command displays the code surrounding this location. Entering the **dup 2** command (while in frame 0) followed by a **dlist** command, for instance, displays source lines centered around the location from which the current routine's parent was invoked. These lines are in frame 2.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| u | dup | Moves up the call stack |

*Examples*:

`dup` Moves up one level in the call stack. As a result, subsequent **dlist** commands refer to the procedure that invoked this one. After this command executes, it displays information about the new frame; for example:

```
1 check_fortran_arrays_ PC=0x10001254,
   FP=0x7fff2ed0 [arrays.F#48]
```

`dfocus p1 u 5` Moves up five levels in the call stack for each thread involved in process 1. If fewer than five levels exist, the CLI moves up as far as it can.

## dwait

Blocks command input until the target processes stop

*Format*: dwait

*Arguments*: This command has no arguments

*Description*: The **dwait** command tells the CLI to wait for all threads in the current focus to stop or exit. Generally, this command treats the focus the same as other CLI commands.

If you interrupt this command—typically by entering Ctrl+C—the CLI manually stops all processes in the current focus before it returns.

Unlike most other CLI commands, this command blocks additional CLI input until the blocking action is complete.

*Examples*:

`dwait`
Blocks further command input until all processes in the current focus have stopped (that is, none of their threads are still *running*).

`dfocus {p1 p2} dwait`
Blocks command input until processes 1 and 2 stop.

# dwatch

Defines a watchpoint

*Format*: Defines a watchpoint for a variable

**dwatch** *variable* [ **–length** *byte-count* ] [ **–g** | **–p** | **–t** ] [ [ **–l** *lang* ] **–e** *expr* ] [ **–t** *type* ]

Defines a watchpoint for an address

**dwatch –address** *addr* **–length** *byte-count* [ **–g** | **–p** | **–t** ] [ [**–l** *lang* ] **–e** *expr* ] [ **–t** *type* ]

*Arguments*:

| | |
|---|---|
| *variable* | A symbol name corresponding to a scalar or aggregate identifier, an element of an aggregate, or a dereferenced pointer. |
| **–address** *addr* | An absolute address in the file. |
| **–length** *byte-count* | The number of bytes to watch. If you enter a variable, the default is the variable's byte length.<br>If you are watching a variable, you only need to specify the amount of storage to watch if you want to override the default value. |
| **–g** | Tells TotalView to stop all processes in the process's control group when the watchpoint triggers. |
| **–p** | Tells TotalView to stop the process that hit this watchpoint. |
| **–t** | Tells TotalView to stop the thread that hit this watchpoint. |
| **–l** *lang* | Specifies the language in which you are writing an expression. The values you can use for *lang* are **c**, **c++**, **f7**, **f9**, and **asm**, for C, C++, FORTRAN 77, Fortran-9x, and assembler, respectively. If you do not use a language code, TotalView picks one based on the variable's type. If you only specify an address, TotalView uses the C language.<br>Not all languages are supported on all systems. |
| **–e** *expr* | When the watchpoint is triggered, evaluates *expr* in the context of the thread that hit the watchpoint. In most cases, you need to enclose the expression in braces (**{ }**). |
| **–t** *type* | The data type of **$oldval**/**$newval** in the expression. |

*Description*: The **dwatch** command defines a watchpoint on a memory location where the specified variables are stored. The watchpoint triggers whenever the value of the variable changes. The CLI returns the ID of the newly created watchpoint.

*Watchpoints are not available on Alpha Linux and* HP.

The value set in the **STOP_ALL** variable indicates which processes and threads stop executing.

The watched variable can be a scalar, array, record, or structure object, or a reference to a particular element in an array, record, or structure. It can also be a dereferenced pointer variable.

The CLI lets you obtain a variable's address in the following ways if your application demands that you specify a watchpoint with an address instead of a variable name:

- **dprint** *&variable*
- **dwhat** *variable*

The **dprint** command displays an error message if the variable is in a register.

*Chapter 14 of the TotalView Users Guide contains additional information on watchpoints.*

If you do not use the **–length** option, the CLI uses the length attribute from the program's symbol table. This means that the watchpoint applies to the data object named; that is, specifying the name of an array lets you watch all elements of the array. Alternatively, you can tell TotalView to watch a certain number of bytes, starting at the named location.

*In all cases, the* CLI *watches addresses. If you specify a variable as the target of a watchpoint, the* CLI *resolves the variable to an absolute address. If you are watching a local stack variable, the position being watched is just where the variable happened to be when space for the variable was allocated.*

The focus establishes the processes (not individual threads) for which the watchpoint is in effect.

The CLI prints a message showing the action point identifier, the location being watched, the current execution location of the triggering thread, and the identifier of the triggering threads.

One possibly confusing aspect of using expressions is that their syntax differs from that of Tcl. This is because you need to embed code written in Fortran, C, or assembler within Tcl commands. In addition, your expressions often include TotalView built-in functions.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| wa | dwatch | Defines a watchpoint |

*Examples:*

For these examples, assume that the current process set at the time of the **dwatch** command consists only of process 2, and that **ptr** is a global variable that is a pointer.

`dwatch *ptr` Watches the address stored in pointer **ptr** at the time the watchpoint is defined, for changes made by process 2. Only process 2 is stopped. The watchpoint location does not change when the value of **ptr** changes.

`dwatch {*ptr}`
Performs the same action as the previous example. Because the argument to the **dwatch** command contains a space, Tcl requires you to place the argument within braces.

`dfocus {p2 p3} wa *ptr`
Watches the address pointed to by **ptr** in processes 2 and 3. Because this example does not contain either a **–p** or **–g** option, the value of the **STOP_ALL** variable lets the CLI know if it should stop processes or groups.

`dfocus {p2 p3 p4} dwatch -p *ptr`
Watches the address pointed to by **ptr** in processes 2, 3, and 4. The **–p** option indicates that TotalView only stops the process triggering the watchpoint.

`wa * aString -length 30 -e {goto $447}`
Watches 30 bytes of data beginning at the location pointed to by **aString**. If any of these bytes change, execution control transfers to line 447.

```
wa my_vbl -type long
    -e {if ($newval == 0x11ffff38) $stop;}
```
Watches the **my_vbl** variable and triggers when **0x11ffff38** is stored in it.

`wa my_vbl -e {if (my_vbl == 0x11ffff38) $stop;}`
Performs the same function as the previous example. This example tests the variable directly rather than by using the **$newval** variable.

## dwhat

Determines what a name refers to

*Format:* **dwhat** *symbol-name*

*Arguments:*

*symbol-name* Fully or partially qualified name specifying a variable, procedure, or other source code symbol.

*Description:* The **dwhat** command tells the CLI to display information about a named entity in a program. The displayed information contains the name of the entity and a description of the name.

*To view information on* CLI *variables or aliases, you need to use the* **dset** *or* **alias** *commands.*

The focus constrains the query to a particular context.

The default width for this command is thread (t).

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| wh | dwhat | Determines what a name refers to |

*Examples:* The following examples show what the CLI displays when you enter one of the indicated commands.

```
dprint timeout   timeout = {
                    tv_sec = 0xc0089540 (-1073179328)
                    tv_usec = 0x000003ff (1023)
                 }
dwhat timeout    In thread 1.1:
                 Name: timeout; Type: struct timeval; Size:
                 8 bytes; Addr: 0x11fffefc0
                    Scope: #fork_loop.cxx#snore \
                        (Scope class: Any)
                    Address class: auto_var \
                       (Local variable)
wh timeval       In process 1:
                 Type name: struct timeval; Size: 8 bytes; \
                          Category: Structure
                    Fields in type:
                    {
                    tv_sec   time_t    (32 bits)
                    tv_usec  int       (32 bits)
                    }
dlist            20    float field3_float;
                 21    double field3_double;
                 22 en_check en1;
                 23
                 24 };
                 25
                 26 main ()
                 27 {
```

```
28    en_check vbl;
29    check_struct s_vbl;
30 >  vbl = big;
31    s_vbl.field2_char = 3;
32    return (vbl + s_vbl.field2_char);
33 }
```

`p vbl`

```
vbl = big (0)
```

`wh vbl`

In thread 2.3:

```
Name: vbl; Type: enum en_check; \
      Size: 4 bytes; Addr: Register 01
   Scope: #check_structs.cxx#main \
      (Scope class: Any)
   Address class: register_var (Register \
      variable)
```

`wh en_check`

In process 2:

```
Type name: enum en_check; Size: 4 bytes; \
      Category: Enumeration
   Enumerated values:
      big    = 0
      little= 1
      fat    = 2
      thin   = 3
```

`p s_vbl`

```
s_vbl = {
   field1_int = 0x800164dc (-2147392292)
   field2_char = '\377' (0xff, or -1)
   field2_chars = "\003"
   <padding> = '\000' (0x00, or 0)
   field3_int = 0xc0006140 (-1073716928)
   field2_uchar = '\377' (0xff, or 255)
   <padding> = '\003' (0x03, or 3)
   <padding> = '\000' (0x00, or 0)
   <padding> = '\000' (0x00, or 0)


   field_sub = {
      field1_int = 0xc0002980 (-1073731200)
      <padding> = '\377' (0xff, or -1)
      <padding> = '\003' (0x03, or 3)
      <padding> = '\000' (0x00, or 0)
      <padding> = '\000' (0x00, or 0)
      field2_long = 0x0000000000000000 (0)
   ...
}
```

`wh s_vbl`

In thread 2.3:

```
Name: s_vbl; Type: struct check_struct; \
      Size: 80 bytes; Addr: 0x11ffff240
   Scope: #check_structs.cxx#main \
      (Scope class: Any)
   Address class: auto_var (Local variable)
```

`wh check_struct`

In process 2:

```
Type name: struct check_struct; \
     Size: 80 bytes; Category: Structure
  Fields in type:
```

```
  {
  field1_int        int           (32 bits)
  field2_char       char          (8 bits)
  field2_chars      <string>[2]   (16 bits)
  <padding>         <char>        (8 bits)
  field3_int        int           (32 bits)
  field2_uchar      unsigned char(8 bits)
  <padding>         <char>[3]     (24 bits)
  field_sub         struct sub_st (320 bits){
     field1_int     int           (32 bits)
     <padding>      <char>[4]     (32 bits)
     field2_long    long          (64 bits)
     field2_ulong   unsigned long(64 bits)
     field3_uint    unsigned int (32 bits)
     en1            enum en_check (32 bits)
     field3_double  double        (64 bits)
  }
  ...
}
```

## dwhere

Displays locations in the call stack

*Format:* dwhere [ *num-levels* ] [ –a ]

*Arguments:*

*num-levels* Restricts output to this number of levels of the call stack. If you omit this option, the CLI shows all levels in the call stack.

–a Displays argument names and values in addition to program location information. If you omit this option, the CLI does not show argument names and values.

*Description:* The **dwhere** command prints the current execution locations and the call stacks—or sequences of procedure calls—that led to that point. The CLI shows information for threads in the current focus, with the default being to show information at the thread level.

Arguments control the amount of command output in two ways:

- The *num-levels* argument lets you control how many levels of the call stacks are displayed, counting from the uppermost (most recent) level. If you omit this argument, the CLI shows all levels in the call stack, which is the default.
- The –a option tells the CLI that it should also display procedure argument names and values for each stack level.

A **dwhere** command with no arguments or options displays the call stacks for all threads in the target set.

The **MAX_LEVELS** variable contains the default maximum number of levels the CLI displays when you do not use the *num-levels* argument.

Output is generated for each thread in the target focus.

*Command alias:*

| Alias | Definition | Description |
|---|---|---|
| w | dwhere | Displays the current location in the call stack |

*Examples:*

`dwhere`
Displays the call stacks for all threads in the current focus.

`dfocus 2.1 dwhere 1`
Displays just the most recent level of the call stack corresponding to thread 1 in process 2. This shows just the immediate execution location of a thread or threads.

`f p1.< w 5`
Displays the most recent five levels of the call stacks for all threads involved in process 1. If the depth of any call stack is less than five levels, all of its levels are shown.

This command is a slightly more complicated way of saying **f p1 w 5** because specifying a process width tells the **dwhere** command to ignore the thread indicator.

`w 1 -a`

Displays the current execution locations (one level only) of threads in the current focus, together with the names and values of any arguments that were passed into the current process.

## dworker

Adds or removes a thread from a workers group

*Format*: dworker { *number* | *boolean* }

*Arguments*:

*number* — If positive, marks the thread of interest as a worker thread by inserting it into the workers group.

*boolean* — If **true**, marks the thread of interest as a worker thread by inserting it into the workers group. If **false**, marks the thread as being a nonworker thread by removing it from the workers group.

*Description*: The **dworker** command inserts or removes a thread from the workers group.

If *number* is **0** or **false**, this command marks the thread of interest as a nonworker thread by removing it from the workers group. If *number* is **true** or is a positive value, this command marks the thread of interest as a worker thread by inserting it in the workers group.

Moving a thread into or out of the workers group has no effect on whether the thread is a manager thread. Manager threads are threads that are created by the pthreads package to manage other threads; they never execute user code, and cannot normally be controlled individually. TotalView automatically inserts all threads that are not manager threads into the workers group.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| wof | {dworker false} | Removes the focus thread from the workers group |
| wot | {dworker true} | Inserts the focus thread into the workers group |

## exit

Terminates the debugging session

*Format:* **exit** [ –force ]

*Arguments:*

| | |
|---|---|
| **–force** | Tells TotalView to exit without asking permission. This is most often used in scripts. |

*Description:* The **exit** command terminates the TotalView session.

After you enter this command, the CLI asks to exit. If you answer yes, TotalView exits. If you entered the CLI from the TotalView GUI, this command also closes the GUI window.

*If you had invoked the* CLI *from within the TotalView* GUI, *pressing Ctrl*+D *closes the* CLI *window without exiting from TotalView.*

TotalView destroys all processes and threads that it makes. Any processes that existed prior to the debugging session (that is, TotalView attached to them because you used the **dattach** command) are detached and left executing.

The **exit** and **quit** commands are interchangeable; they do the same thing.

*Examples:*

| | |
|---|---|
| `exit` | Exits TotalView, leaving any attached processes running. |

# help

Displays help information

*Format*: **help** [ *topic* ]

*Arguments*:

| | |
|---|---|
| *topic* | The topic or command for which the CLI prints information. |

*Description*: The **help** command prints information about the specified topic or command. If you do no use an argument, the CLI displays a list of the topics for which help is available.

If the CLI needs more than one screen to display the help information, it fills the screen with data and then displays a *more* prompt. You can press Enter to see more data or enter **q** to return to the CLI prompt.

When you type a topic name, the CLI attempts to complete what you type. The **help** command also allows you to enter one of the CLI built-in aliases; for example:

```
d1.<> he a
Ambiguous help topic "a". Possible matches:
    alias accessors arguments addressing_expressions
d1.<> he ac
"ac" has been aliased to "dactions":
dactions [ bp-ids ... ] [ -at <source-loc> ] [ -disabled | \
              -enabled ]
   Default alias: ac
...
d1.<> he acc
   The following commands provide access to the properties
   of TotalView objects:
   ...
```

You can use the **capture** command to place help information into a variable.

*Command alias*:

| Alias | Definition | Description |
|---|---|---|
| he | help | Displays help information |

*Examples*:

| | |
|---|---|
| `help help` | Prints information about the **help** command. |

## quit

Terminates the debugging session

*Format*: **quit** [ –force ]

*Arguments*: **–force** Tells the CLI that it should close all TotalView processes without asking permission.

*Arguments*: **–force** Tells TotalView to exit without asking permission. This is most often used in scripts.

*Description*: The **exit** command terminates the TotalView session.

After you enter this command, the CLI asks to exit. If you answer yes, TotalView exits. If you entered the CLI from the TotalView GUI, this command also closes the GUI window.

*If you had invoked the* CLI *from within the TotalView* GUI, *pressing Ctrl*+D *closes the* CLI *window without exiting from TotalView.*

TotalView destroys all processes and threads that it makes. Any processes that existed prior to the debugging session (that is, TotalView attached to them because you used the **dattach** command) are detached and left executing.

The **exit** and **quit** commands are interchangeable; they do the same thing.

*Examples*: `exit` Exits TotalView, leaving any attached processes running.

## stty

Sets terminal properties

*Format*: **stty** [ *stty-args* ]

*Arguments*:

| | |
|---|---|
| *stty-args* | One or more UNIX **stty** command arguments as defined in the **man** page for your operating system. |

*Description*: The CLI **stty** command executes a UNIX **stty** command on the **tty** associated with the CLI window. This lets you set all of your terminal's properties. However, this is most often used to set erase and kill characters.

If you start the CLI from a terminal by using the **totalviewcli** command, the **stty** command alters this terminal's environment. Consequently, the changes you make using this command are retained in the terminal after you exit.

If you omit the *stty-args* argument, the CLI displays information about your current settings.

The output from this command is returned as a string.

*Examples*:

| | |
|---|---|
| `stty` | Prints information about your terminal settings. The information it prints is the same as if you had entered **stty** while interacting with a shell. |
| `stty -a` | Prints information about all of your terminal settings. |
| `stty erase ^H` | Sets the *erase* key to Backspace. |
| `stty sane` | Resets the terminal's settings to values that the shell thinks they should be. If you are having problems with command-line editing, use this command. (The **sane** argument is not available in all environments.) |

## unalias

Removes a previously defined alias

*Format*: Removes an alias

**unalias** *alias-name*

Removes all aliases

**unalias –all**

*Arguments*:

| | |
|---|---|
| *alias-name* | The name of the alias to delete. |
| **–all** | Tells the CLI to remove all aliases. |

*Description*: The **unalias** command removes a previously defined alias. You can delete all aliases by using the **–all** option. Aliases defined in the **tvdinit.tvd** file are also deleted.

*Examples*:

| | |
|---|---|
| `unalias step2` | Removes the **step2** alias; **step2** is undefined and can no longer be used. If **step2** was included as part of the definition of another command, that command no longer works correctly. However, the CLI only displays an error message when you try to execute the alias that contains this removed alias. |
| `unalias -all` | Removes all aliases. |

# CLI Namespace Commands

3

This chapter contains detailed descriptions of CLI namespace commands.

## Command Overview

This section lists all of the CLI namespace commands. It also contains a short explanation of what each command does.

### Accessor Functions

The following functions, all within the TV:: namespace, access and set TotalView properties:

- **actionpoint:** Accesses and sets action point properties.
- **expr**: Manipulates values created by the dprint –nowait command.
- **focus_groups:** Returns a list containing the groups in the current focus.
- **focus_processes:** Returns a list of processes in the current focus.
- **focus_threads:** Returns a list of threads in the current focus.
- **group**: Accesses and sets group properties.
- **process:** Accesses and sets process properties.
- **scope**: Accesses and sets scope properties.
- **symbol**: Accesses and sets symbol properties.
- **thread:** Accesses and sets thread properties.
- **type:** Accesses and sets data type properties.
- **type_transformation**: Accesses and defines type transformations.

### Helper Functions

The following functions, all within the TV:: namespace, are most often used in scripts:

- **dec2hex:** Converts a decimal number into hexadecimal format.
- **dll**: Manages shared libraries.
- **errorCodes:** Returns or raises TotalView error information.
- **hex2dec:** Converts a hexadecimal number into decimal format.

- **read_symbols**: Reads shared library symbols.
- **respond**: Sends a response to a command.
- **source_process_startup**: Reads and executes a **.tvd** file when TotalView loads a process.

## actionpoint

Sets and gets action point properties

*Format:* TV::actionpoint *action* [ *object-id* ] [ *other-args* ]

*Arguments:*

*action* — The action to perform, as follows:

- **commands** — Displays the subcommands that you can use. The CLI responds by displaying these four *action* subcommands. There are no arguments to this subcommand.
- **get** — Retrieves the values of one or more action point properties. The *other-args* argument can include one or more property names. The CLI returns values for these properties in a list whose order is the same as the names you enter.

  If you use the **–all** option instead of the *object-id*, the CLI returns a list containing one (sublist) element for each object.
- **properties** — Lists the action point properties that TotalView can access. There are no arguments to this subcommand.
- **set** — Sets the values of one or more properties. The *other-args* argument contains property name and value pairs.

*object-id* — An identifier for the action point.

*other-args* — Arguments that the **get** and **set** actions use.

*Description:* The **TV::actionpoint** command lets you examine and set the following action point properties and states:

- **address** — The address of the action point.
- **enabled** — A value (either 1 or 0) indicating if the action point is enabled. A value of 1 means enabled. (settable)
- **expression** — The expression to execute at an action point. (settable)
- **id** — The ID of the action point.
- **language** — The language in which the action point expression is written.
- **length** — The length in bytes of a watched area. This property is only valid for watchpoints. (settable)
- **line** — The source line at which the action point is set. This property is not valid for watchpoints.
- **satisfaction_group** — The group that must arrive at a barrier for the barrier to be *satisfied*. (settable)
- **share** — A value (either 1 or 0) indicating if the action point is active in the entire share group. A value of 1 means that it is. (settable)
- **stop_when_done** — A value that indicates what is stopped when a barrier is satisfied (in addition to the satisfaction set). Values are **process**, **group**, or **none**. (settable)

**stop_when_hit** A value that indicates what is stopped when an action point is hit (in addition to the thread that hit the action point). Values are **process**, **group**, or **none**. (settable)

**type** The object's type. (See **type_values** for a list of possible types.)

**type_values** Lists values that can TotalView can assign to the **type** property: **break**, **eval**, **process_barrier**, **thread_barrier**, and **watch**.

*Examples*:

```
TV::actionpoint set 5 share 1 enable 1
```

Shares and enables action point 5.

```
f p3 TV::actionpoint set -all enable 0
```

Disables all the action points in process 3.

```
foreach p [TV::actionpoint properties] {
            puts [format "%20s %s" $p: \
            [TV::actionpoint get 1 $p]]
```

Dumps all the properties for action point 1. Here is what your output might look like:

```
                 address: 0x1200019a8
                 enabled: 0
              expression:
                      id: 1
                language:
                  length:
                    line: /temp/arrays.F#84
     satisfaction_group:
   satisfaction_process:
     satisfaction_width:
                   share: 1
          stop_when_done:
           stop_when_hit: group
                    type: break
             type_values: break eval
                          process_barrier
                          thread_barrier
                          watch
```

## dec2hex

Converts a decimal number into hexadecimal

*Format*: TV::dec2hex *number*

*Arguments*: *number* A decimal number to convert.

*Description*: The TV::dec2hex command converts a decimal number into hexadecimal. This command correctly manipulates 64-bit values, regardless of the size of a long value on the host system.

# dll

Manages shared libraries

*Format*: TV::dll *action* [ *dll-id-list* ] [ –all ]

*Arguments*:

*action* — The action to perform, as follows:

- **close** — Dynamically unloads the shared object libraries that were dynamically loaded by the **ddlopen** commands corresponding to the list of *dll-ids*.

  If you use the **–all** option, TotalView closes all of the libraries that it opened.
- **commands** — Displays the subcommands that you can use. The CLI responds by displaying these four *action* subcommands. There are no arguments to this subcommand.
- **get** — Retrieves the values of one or more **TV::dll** properties. The *other-args* argument can include one or more property names.

  If you use the **–all** option as the *dll-id-list*, the CLI returns a list containing one (sublist) element for each object.
- **properties** — Lists the **TV::dll** properties that TotalView can access. There are no arguments to this subcommand.
- **resolution_urgency_values** — Returns a list of values that this property can take. This list is operating-system specific, but always includes **{lazy now}**.
- **symbol_availability_values** — Returns a list of values that this property can take. This list is operating system specific, but always includes **{lazy now}**.

***dll-id-list*** — A list of one or more dll-ids. There are the IDs returned by the **ddlopen** command.

**–all** — Closes all shared libraries that you opened using the **ddlopen** command.

*Description*: The **TV::dll** command either closes shared libraries that were dynamically loaded with the **ddlopen** command or obtains information about loaded shared libraries.

*Examples*:

`TV::dll close 1` Closes the first shared library that you opened:

## errorCodes

Returns or raises TotalView error information

*Format*: Returns a list of all error code tags

**TV::errorCodes**

Returns or raises error information

**TV::errorCodes** *number_or_tag* [ **–raise** [ *message* ] ]

*Arguments*:

| | |
|---|---|
| *number_or_tag* | An error code mnemonic tag or its numeric value. |
| **–raise** | Raises the corresponding error. If you append a *message*, TotalView returns this string. Otherwise, TotalView uses the human-readable string for the error. |
| *message* | An optional string used when raising an error. |

*Description*: The **TV::errorCodes** command lets you manipulate the TotalView error code information placed in the Tcl **errorCodes** variable. The CLI sets this variable after every command error. Its value is intended to be easy to parse in a Tcl script.

When the CLI or TotalView returns an error, **errorCodes** is set to a list with the following format:

**TOTALVIEW** *error-code subcodes... string*

where:

- The first list element is always **TOTALVIEW**.
- The second list element is always the error code.
- The *subcodes* argument is not used at this time.
- The last list element is a string describing the error.

With a tag or number, this command returns a list containing the mnemonic tag, the numeric value of the tag, and the string associated with the error.

The **–raise** option tells the CLI to raise an error. If you add a message, that message is used as the return value; otherwise, the CLI uses its textual explanation for the error code. This provides an easy way to return errors from a script.

*Examples*:

```
foreach e [TV::errorCodes] {
            puts [eval format {"%20s %2d %s"} \
            [TV::errorCodes $e]]}
```

Displays a list of all TotalView error codes.

## expr

Manipulates values created by the dprint –nowait command

*Format:* TV::expr *action* [ *susp-eval-id* ] [ *other-args* ]

*Arguments:*

*action* — The action to perform, as follows:

- **commands** — Displays the subcommands that you can use. The CLI responds by displaying the subcommands shown here. Do not use additional arguments with this subcommand.
- **delete** — Deletes all data associated with a suspended ID. If you use this command, you can specify an *other-args* argument. If you use the **–done** option, the CLI deletes the data for all completed expressions; that is, those expressions for which **TV::expr get** *susp-eval-id* **done** returns 1. If you specify **–all**, the CLI deletes all data for all expressions.
- **get** — Gets the values of one or more **expr** properties. The *other-args* argument can include one or more values. The CLI returns these values in a list whose order is the same as the property names.

  If you use the **–all** option instead of *susp-eval-id*, the CLI returns a list containing one (sublist) element for each object.
- **properties** — Displays the properties that the CLI can access. Do not use additional arguments with this option.

*susp-eval-id* — The ID returned or thrown by the **dprint** command, or printed by the **dwhere** command.

*other-args* — Arguments required by the **delete** subcommand.

*Description:* The **TV::expr** command, in addition to showing you command information, returns and deletes values returned by a **dprint –nowait** command. You can use the following properties for this command:

- **done** — **TV::expr** returns 1 if the process associated with *susp-eval-id* has finished in all focus threads. Otherwise, it returns 0.
- **expression** — The expression to execute.
- **focus_threads** — A list of *dpid.dtid* values in which the expression is being executed.
- **id** — The *susp-eval-id* of the object.
- **initially_suspended_process** — A list of dpid IDs for the target processes that received control because they executed the function calls or compiled code. You can wait for processes to complete by entering the following:

```
dfocus p dfocus [TV::expr get \
   susp-eval-id \
   initially_suspended_processes] dwait
```

**result**

A list of pairs for each thread in the current focus. Each pair contains the thread as the first element and that thread's result string as the second element; for example:

```
d1.<> dfocus {1.1 2.1} TV::expr \
   get susp-eval-id result
{{1.1 2} {2.1 3}} d1.<>
```

The result of expression *susp-eval-id* in thread 1.1 is 2, and in thread 2.1 is 3.

**status**

A list of pairs for each thread in the current focus. Each pair contains the thread ID as the first element and that thread's status string as the second element. The possible status strings are **done**, **suspended**, and **{error** *diag***}**.

For example, if expression *susp-eval-id* finished in thread 1.1, suspended on a breakpoint in thread 2.1, and received a syntax error in thread 3.1, that expression's status property has the following value when **TV::expr** is focused on threads 1.1, 2.1, and 3.1:

```
d1.<> dfocus {t1.1 t2.1 t3.1} \
   TV::expr get 1 status
{1.1 done} {2.1 suspended} {3.1 {error
{Symbol nothing2 not found}}}
d1.<>
```

## focus_groups

Returns a list of groups in the current focus

*Format*: TV::focus_groups

*Arguments*: This command has no arguments

*Description*: The TV::focus_groups command returns a list of all groups in the current focus.

*Examples*: f d1.< TV::focus_groups

Returns a list containing one entry, which is the ID of the control group for process 1.

## focus_processes

Returns a list of processes in the current focus

*Format*: TV::focus_processes [ –all | –group | –process | –thread ]

*Arguments*:

| | |
|---|---|
| –all | Changes the default width to **all**. |
| –group | Changes the default width to **group**. |
| –process | Changes the default width to **process**. |
| –thread | Changes the default width to **thread**. |

*Description*: The **TV::focus_processes** command returns a list of all processes in the current focus. If the focus width is something other than **d** (default), the focus width determines the set of processes returned. If the focus width is **d**, the **TV::focus_processes** command returns process width. Using any of the options changes the default width.

*Examples*: `f g1.< TV::focus_processes`

Returns a list containing all processes in the same control as process 1.

## focus_threads

Returns a list of threads in the current focus

*Format*: TV::focus_threads [ –all | –group | –process | –thread ]

*Arguments*:

| | |
|---|---|
| –all | Changes the default width to **all**. |
| –group | Changes the default width to **group**. |
| –process | Changes the default width to **process**. |
| –thread | Changes the default width to **thread**. |

*Description*: The **TV::focus_threads** command returns a list of all threads in the current focus. If the focus width is something other than **d** (default), the focus width determines the set of threads returned. If the focus width is **d**, the **TV::focus_threads** command returns thread width. Using any of the options changes the default width.

*Examples*: `f p1.< TV::focus_threads`

Returns a list containing all threads in process 1.

## group

Sets and gets group properties

*Format:* TV::group *action* [ *object-id* ] [ *other-args* ]

*Arguments:*

*action* — The action to perform, as follows:

- **commands** — Displays the subcommands that you can use. The CLI responds by displaying these four *action* subcommands. Do not use additional arguments with this subcommand.
- **get** — Gets the values of one or more group properties. The *other-args* argument can include one or more property names. The CLI returns the values for these properties in a list in the same order as you entered the property names.

  If you use the **–all** option instead of *object-id*, the CLI returns a list containing one (sublist) element for each group.
- **properties** — Displays the properties that the CLI can access. Do not use additional arguments with this option.
- **set** — Sets the values of one or more properties. The *other-args* argument is a sequence of property name and value pairs.

*object-id* — The group ID. If you use the **–all** option, TotalView executes this operation on all groups in the current focus.

*other-args* — Arguments required by the **get** and **set** subcommands.

*Description:* The **TV::group** command lets you examine and set the following group properties and states:

- **count** — The number of members in a group.
- **id** — The ID of the object.
- **member_type** — The type of the group's members, either **process** or **thread**.
- **member_type_values** — A list of all possible values for the **member_type** property.
- **members** — A list of a group's processes or threads.
- **type** — The group's type. Possible values are **control**, **lockstep**, **share**, **user**, and **workers**.
- **type_values** — A list of all possible values for the **type** property.

*Examples:*

```
TV::group get 1 count
```

Returns the number of objects in group 1.

## hex2dec

Converts a hexadecimal number to decimal

*Format:* TV::hex2dec *number*

*Arguments:* *number* A hexadecimal number to convert.

*Description:* The TV::hex2dec command converts a hexadecimal number to decimal. You can type 0x before this value. The CLI correctly manipulates 64-bit values, regardless of the size of a long value.

## process

Sets and gets process properties

*Format*: TV::process *action* [ *object-id* ] [ *other-args* ]

*Arguments*:

*action* — The action to perform, as follows:

- **commands** — Displays the subcommands that you can use. The CLI responds by displaying these four *action* subcommands. Do not use other arguments with this subcommand.
- **get** — Gets the values of one or more process properties. The *other-args* argument can include one or more property names. The CLI returns these property values in a list whose order is the same as the names you enter.

  If you use the **–all** option instead of *object-id*, the CLI returns a list containing one (sublist) element for each object.
- **properties** — Displays the properties that the CLI can access. Do not use other arguments with this subcommand.
- **set** — Sets the values of one or more properties. The *other-args* arguments contains pairs of property names and values.

*object-id* — An identifier for a process. For example, **1** represents process 1. If you use the **–all** option, the operation executes upon all objects of this class in the current focus.

*other-args* — Arguments required by the **get** and **set** subcommands.

*Description*: The **TV::process** command lets you examine and set process properties and states, as the following list describes:

**clusterid** — The ID of the cluster containing the process. This is a number uniquely identifying the TotalView server that owns the process. The ID for the cluster TotalView is running in is always **0** (zero).

**duid** — The internal unique ID associated with an object.

**executable** — The program's name.

**heap_size** — The amount of memory currently being used for data created at runtime. Stated in a different way, the heap is an area of memory that your program uses when it needs to dynamically allocate memory. For example, calls to the **malloc()** function allocate space on the heap while the **free()** function releases the space.

**held** — A Boolean value (either **1** or **0**) indicating if the process is held. (**1** means that the process is held.)

**hostname** — The name of the process's host system.

**id** — The process ID.

**image_ids** — A list of the IDs of all the images currently loaded into the process both statically and dynamically. The first element of the list is the current executable.

**nodeid** The ID of the node upon which the process is running. The ID of each processor node is unique within a cluster.

**stack_size** The amount of memory used by the currently executing block or routines, and all the routines that have invoked it. For example, if your main routines invokes the **foo()** function, the stack contains two groups of information—these groups are called frames. The first frame contains the information required for the execution of your main routine and the second, which is the current frame, contains the information needed by the **foo()** function. If **foo()** invokes the **bar()** function, the stack contains three frames. When **foo()** finishes executing, the stack only contains one frame.

**stack_vm_size** The logical size of the stack is the difference between the current value of the stack pointer and the address from which the stack originally grew. This value can be different from the size of the virtual memory mapping in which the stack resides. For example, the mapping can be larger than the logical size of the stack if the process previously had a deeper nest of procedure calls or made memory allocations on the stack, or it can be smaller if the stack pointer has advanced but the intermediate memory has not been touched.

The **stack_vm_size** value is this difference in size.

**state** Current state of the process. See **state_values** for a list of states.

**state_values** A list of all possible values for the **state** property: **break**, **error**, **exited**, **running**, **stopped**, or **watch**.

**syspid** The system process ID.

**text_size** The amount of memory used to store your program's machine code instructions. The text segment is sometimes called the code segment.

**threadcount** The number of threads in the process.

**threads** A list of threads in the process.

**vm_size** The sum of the sizes of the mappings in the process's address space.

*Examples:*

`f g TV::process get -all id threads`

For each process in the group, creates a list with the process ID followed by the list of threads; for example:

```
{1 {1.1 1.2 1.4}} {2 {2.3 2.5}} {3 {3.1
3.7 3.9}}
```

`TV::process get 3 threads`

Gets the list of threads for process 3; for example:

```
1.1 1.2 1.4
```

`TV::process get 1 image_ids`

Returns a list of image IDs in process 1; for example:

```
1|1 1|2 1|3 1|4
```

## read_symbols

Reads shared library symbols

*Format*: Reads symbols from libraries

**TV::read_symbols –lib** *lib-name-list*

Reads symbols from libraries associated with a stack frame

**TV::read_symbols –frame** [*number*]

Reads symbols for all stack frames in the backtrace

**TV::read_symbols –stack**

*Arguments*:

**–lib** [*lib-name-list*] Tells TotalView to read symbols for all libraries whose names are contained within the *lib-name-list* argument. Each name can include the asterisk (*) and question mark (?) wildcard characters.

This command ignores the current focus; libraries for any process can be affected.

**–frame** [*number*] Tells TotalView to read the symbols for the library associated with the current stack frame. If you also enter a frame number, TotalView reads the symbols for the library associated with that frame.

**–stack** Reads the symbols for every frame in the backtrace. This is the same as right-clicking in the Stack Trace Pane and selecting the **Load All Symbols in Stack** command. If, while reading in a library, TotalView may also need to read in the symbols from additional libraries.

*Description*: The **TV::read_symbols** command reads debugging symbols from one or more libraries that TotalView has already loaded but whose symbols have not yet been read. They are not yet read because the libraries were included within either the **TV::dll_read_loader_symbols_only** or **TV::dll_read_no_symbols** lists.

For more information, see "*Preloading Shared Libraries*" in the "*Debugging Programs*" chapter of the *TotalView Users Guide*.

## respond

Provides responses to commands

*Format*: TV::respond *response command*

*Arguments*:

*response* — The response to one or more commands. If you include more than one response, separate the responses with newline characters.

*command* — One or more commands that the CLI executes.

*Description*: The TV::respond command executes a command. The *command* argument can be a single command or a list of commands. In most cases, you place this information in braces (**{}**). If the CLI asks questions while *command* is executing, you are not asked for the answer. Instead, the CLI uses the characters in the *response* string for the argument. If more than one question is asked and strings within the *response* argument have all been used, The TV::respond command starts over at the beginning of the *response* string. If *response* does not end with a newline, the TV::respond command appends one.

Do not use this command to suppress the MORE prompt in macros. Instead, use the following command:

```
dset LINES_PER_SCREEN 0
```

The most common values for *response* are **y** and **n**.

*If you are using the TotalView GUI and the CLI at the same time, your CLI command might cause dialog boxes to appear. You cannot use the* TV::respond *command to close or interact with these dialog boxes.*

*Examples*:

```
TV::respond {y} {exit}
```

Exits from TotalView. This command automatically answers the "Do you really wish to exit TotalView" question that the **exit** command asks.

```
set f1 y
set f2 exit
TV::respond $f1 $f2
```

A way to exit from TotalView without seeing the "Do you really wish to exit TotalView" question. This example and the one that preceded are not really what you would do as you would use the **exit –force** command.

## scope

Sets and gets internal scope properties

*Format:* TV::scope *action* [ *object-id* ] [ *other-args* ]

*Arguments:* *action* The action to perform, as follows:

- **cast** Attempts to find or create the type named by the *other-args* argument in the given scope.
- **commands** Displays the subcommands that you can use. The CLI responds by displaying the subcommands shown here. Do not use additional arguments with this subcommand.
- **dump** Dump all properties of all symbols in the scope and in the enclosed scope.
- **get** Returns properties of the symbols whose soids are specified. Specify the kinds of properties using the *other-args* argument.

  If you use the **–all** option instead of *object-id*, the CLI returns a list containing one (sublist) element for each object.
- **lookup** Look up a symbol by name. Specify the kind of lookup using the *other-args* argument. The values you can enter are:

  **by_language_rules**: Use the language rules of the language of the scope to find a single name.

  **by_path**: Look up a symbol using a pathname.

  **by_type_index**: Look up a symbol using a type index.

  **in_scope**: Look up a name in the given scope and in all enclosing scopes, and in the global scope.
- **lookup_keys** Displays the kinds of lookup operations that you can perform.
- **properties** Displays the properties that the CLI can access. Do not use additional arguments with this option. The arguments displayed are those that are displayed for the scope of all types. Additional properties also exist but are not shown.(Only the ones used by all are visible.) For more information, see **TV::symbol**.
- **walk** Walk the scope, calling Tcl commands at particular points in the walk. The commands are named using the following options:

  **–pre_scope** *tcl_cmd*: Names the commands called before walking a scope.

  **–pre_sym** *tcl_cmd*: Names the commands called before walking a symbol.

  **–post_scope** *tcl_cmd*: Names the commands called after walking a scope.

| | |
|---|---|
| | **–post_symbol** *tcl_cmd*: Names the commands called after walking a symbol.<br>*tcl_cmd*: Names the commands called for each symbol. |
| **object-id** | The ID of a scope. |
| *other-args* | Arguments required by the **get** subcommand. |

*Description*: The **TV::scope** command lets you examine and set a scope's properties and states.

## source_process_startup

Reads, then executes a .tvd file when a process is loaded

*Format*: TV::source_proccess_startup *process_id*

*Arguments*: *process_id* The PID of the current process.

*Description*: The TV::source_process_startup command loads and interprets the .tvd file associated with the current process. That is, if a file named *executable*.tvd exists, the CLI reads and then executes the commands in it.

## symbol

Gets and sets symbol properties

*Format:* TV::symbol *action* [ *object-id* ] [ *other-args* ]

*Arguments:* *action* The action to perform, as follows:

**commands** Displays the subcommands that you can use. The CLI responds by displaying the subcommands shown here. Do not use additional arguments with this subcommand.

**dump** Dumps all properties of the symbol whose soid (symbol object ID) is named. Do not use additional arguments with this command.

**get** Returns properties of the symbols whose soids are specified here. The *other-args* argument names the properties to be returned.

**properties** Displays the properties that the CLI can access. Do not use additional arguments with this option. These properties are discussed later in this section.

**read_delayed**
Only global symbols are initially read; other symbols are only partially read. This command forces complete symbol processing for the compilation units that contain the named symbols.

**resolve_final**
Performs a sequence of **resolve_next** operations until the symbol is no longer undiscovered. If you apply this operation to a symbol that is not undiscovered, it returns the symbol itself.

**resolve_next**
Some symbols only serve to hold a reference to another symbol. For example, a **typedef** is a reference to the aliased type, or a **const**-qualified type is a reference to the non-**const**s qualified type. These reference types are called *undiscovered symbols*. This operation, when performed on an undiscovered symbol, returns the symbol the type refers to. When this is performed on a symbol, it returns the symbol itself.

**rebind** Changes one or more structural properties of a symbol. These operations can crash TotalView or cause TotalView to produce inconsistent results. The properties that you can change are:

**address**: the new address:

**base_name**: the new base name. The symbol must be a base name.

**line_number**: the new line number. The symbol must be a line number symbol.

**loader_name**: the new loader name and a file name.

**scope**: the soid of a new scope owner.

| | |
|---|---|
| | **type_index**: the new type index, in the form <n, m, p>. The symbol must be a type. |
| **object-id** | The ID of a symbol. |
| *other-args* | Arguments required by the **get** subcommand. |

*Description:* The **TV::symbol** command lets you examine and set the symbol properties and states.

**Symbol Properties** The following table lists the properties associated with the symbols information that TotalView stores. Not all of this information will be useful when creating transformations. However, it is possible to come across some of these properties and this information will help you decide if you need to use it in your transformation. In general, the properties used in the transformation files that Etnus provided will be the ones that you will use.

| Symbol Kind | Has base_name | Has type_index | Property | | |
|---|---|---|---|---|---|
| aggregate_type | ✔ | ✔ | aggregate_kind<br>artificial<br>external_name | full_pathname<br>id<br>kind | length<br>logical_scope_owner<br>scope_owner |
| array_type | ✔ | ✔ | artificial<br>data_addressing<br>element_addressing<br>external_name<br>full_pathname<br>id | index_type_index<br>kind<br>logical_scope_owner<br>lower_bound<br>scope_owner<br>stride_bound | submembers<br>target_type_index<br>upper_bound<br>validator |
| block | ✔ | | address_class<br>artificial<br>full_pathname | id<br>kind<br>length | location<br>logical_scope_owner<br>scope_owner |
| char_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>logical_scope_owner | scope_owner |
| code_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>logical_scope_owner | scope_owner |
| common | ✔ | | address_class<br>artificial<br>full_pathname | id<br>kind<br>location | logical_scope_owner<br>scope_owner |
| ds_undiscovered_type | ✔ | ✔ | artificial<br>full_pathname<br>id | kind<br>logical_scope_owner<br>scope_owner | target_type_index |
| enum_type | ✔ | ✔ | artificial<br>enumerators<br>external_name | full_pathname<br>id<br>kind | logical_scope_owner<br>scope_owner<br>value_size |

| Symbol Kind | Has base_name | Has type_index | Property | | |
|---|---|---|---|---|---|
| error_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>length | logical_scope_owner<br>scope_owner |
| file | ✔ | | artificial<br>compiler_kind<br>delayed_symbol<br>demangler | full_pathname<br>id<br>kind<br>language | logical_scope_owner<br>scope_owner |
| float_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>length | logical_scope_owner<br>scope_owner |
| function_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>logical_scope_owner | scope_owner |
| image | ✔ | | artificial<br>full_pathname | id | kind |
| int_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>length | logical_scope_owner<br>scope_owner |
| label | ✔ | | address_class<br>artificial<br>full_pathname | id<br>kind<br>location | logical_scope_owner<br>scope_owner |
| linenumber | | | address_class<br>artificial<br>full_pathname | id<br>kind<br>location | logical_scope_owner<br>scope_owner |
| loader_symbol | | | address_class<br>artificial<br>full_pathname | id<br>kind<br>length | location<br>logical_scope_owner<br>scope_owner |
| member | ✔ | | address_class<br>artificial<br>full_pathname<br>id | inheritance<br>kind<br>location<br>logical_scope_owner | ordinal<br>scope_owner<br>type_index |
| module | ✔ | | artificial<br>full_pathname | id<br>kind | logical_scope_owner<br>scope_owner |
| named_constant | ✔ | | artificial<br>full_pathname<br>id | kind<br>length<br>logical_scope_owner | scope_owner<br>type_index<br>value |
| namespace | ✔ | | artificial<br>full_pathname | id<br>kind | logical_scope_owner<br>scope_owner |
| opaque_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>logical_scope_owner | scope_owner |

| Symbol Kind | Has base_name | Has type_index | Property | | |
|---|---|---|---|---|---|
| error_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>length | logical_scope_owner<br>scope_owner |
| file | ✔ | | artificial<br>compiler_kind<br>delayed_symbol<br>demangler | full_pathname<br>id<br>kind<br>language | logical_scope_owner<br>scope_owner |
| float_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>length | logical_scope_owner<br>scope_owner |
| function_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>logical_scope_owner | scope_owner |
| image | ✔ | | artificial<br>full_pathname | id | kind |
| int_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>length | logical_scope_owner<br>scope_owner |
| label | ✔ | | address_class<br>artificial<br>full_pathname | id<br>kind<br>location | logical_scope_owner<br>scope_owner |
| linenumber | | | address_class<br>artificial<br>full_pathname | id<br>kind<br>location | logical_scope_owner<br>scope_owner |
| loader_symbol | | | address_class<br>artificial<br>full_pathname | id<br>kind<br>length | location<br>logical_scope_owner<br>scope_owner |
| member | ✔ | | address_class<br>artificial<br>full_pathname<br>id | inheritance<br>kind<br>location<br>logical_scope_owner | ordinal<br>scope_owner<br>type_index |
| module | ✔ | | artificial<br>full_pathname | id<br>kind | logical_scope_owner<br>scope_owner |
| named_constant | ✔ | | artificial<br>full_pathname<br>id | kind<br>length<br>logical_scope_owner | scope_owner<br>type_index<br>value |
| namespace | ✔ | | artificial<br>full_pathname | id<br>kind | logical_scope_owner<br>scope_owner |
| opaque_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>logical_scope_owner | scope_owner |

| Symbol Kind | Has base_name | Has type_index | Property | | |
|---|---|---|---|---|---|
| pathname_reference_symbol | ✔ | | artificial<br>id<br>full_pathname | kind<br>lookup_scope<br>logical_scope_owner | resolved_symbol_pathname<br>scope_owner |
| pointer_type | | ✔ | artificial<br>external_name<br>full_pathname<br>id | kind<br>length<br>logical_scope_owner<br>scope_owner | target_type_index<br>validator |
| qualified_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>logical_scope_owner | qualification<br>scope_owner<br>target_type_index |
| soid_reference_symbol | ✔ | | artificial<br>full_pathname<br>id | kind<br>logical_scope_owner<br>resolved_symbol_id | scope_owner |
| stringchar_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>logical_scope_owner | scope_owner |
| subroutine | ✔ | | address_class<br>artificial<br>full_pathname<br>id | kind<br>length<br>location<br>logical_scope_owner | return_type_index<br>scope_owner<br>static_chain<br>static_chain_height |
| typedef | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>length | logical_scope_owner<br>scope_owner<br>target_type_index |
| variable | ✔ | | address_class<br>artificial<br>full_pathname<br>id | is_argument<br>kind<br>location<br>logical_scope_owner | ordinal<br>scope_owner<br>type_index |
| void_type | ✔ | ✔ | artificial<br>external_name<br>full_pathname | id<br>kind<br>length | logical_scope_owner<br>scope_owner |

The figure on the following page shows how these symbols are related. Here are definitions of the properties associated with these symbols.

**address_class** contains the location for a variety of objects such as a **func**, **global_var**, and a **tls_global**.

**aggregate_kind** One of the following: **struct**, **class**, or **union**.

**artificial** A Boolean (0 or 1) value where true indicates that the compiler generated the symbol.

**compiler_kind** The compiler or family of compiler used to create the file; for example, **gnu**, **xlc**, **intel**, and so on.

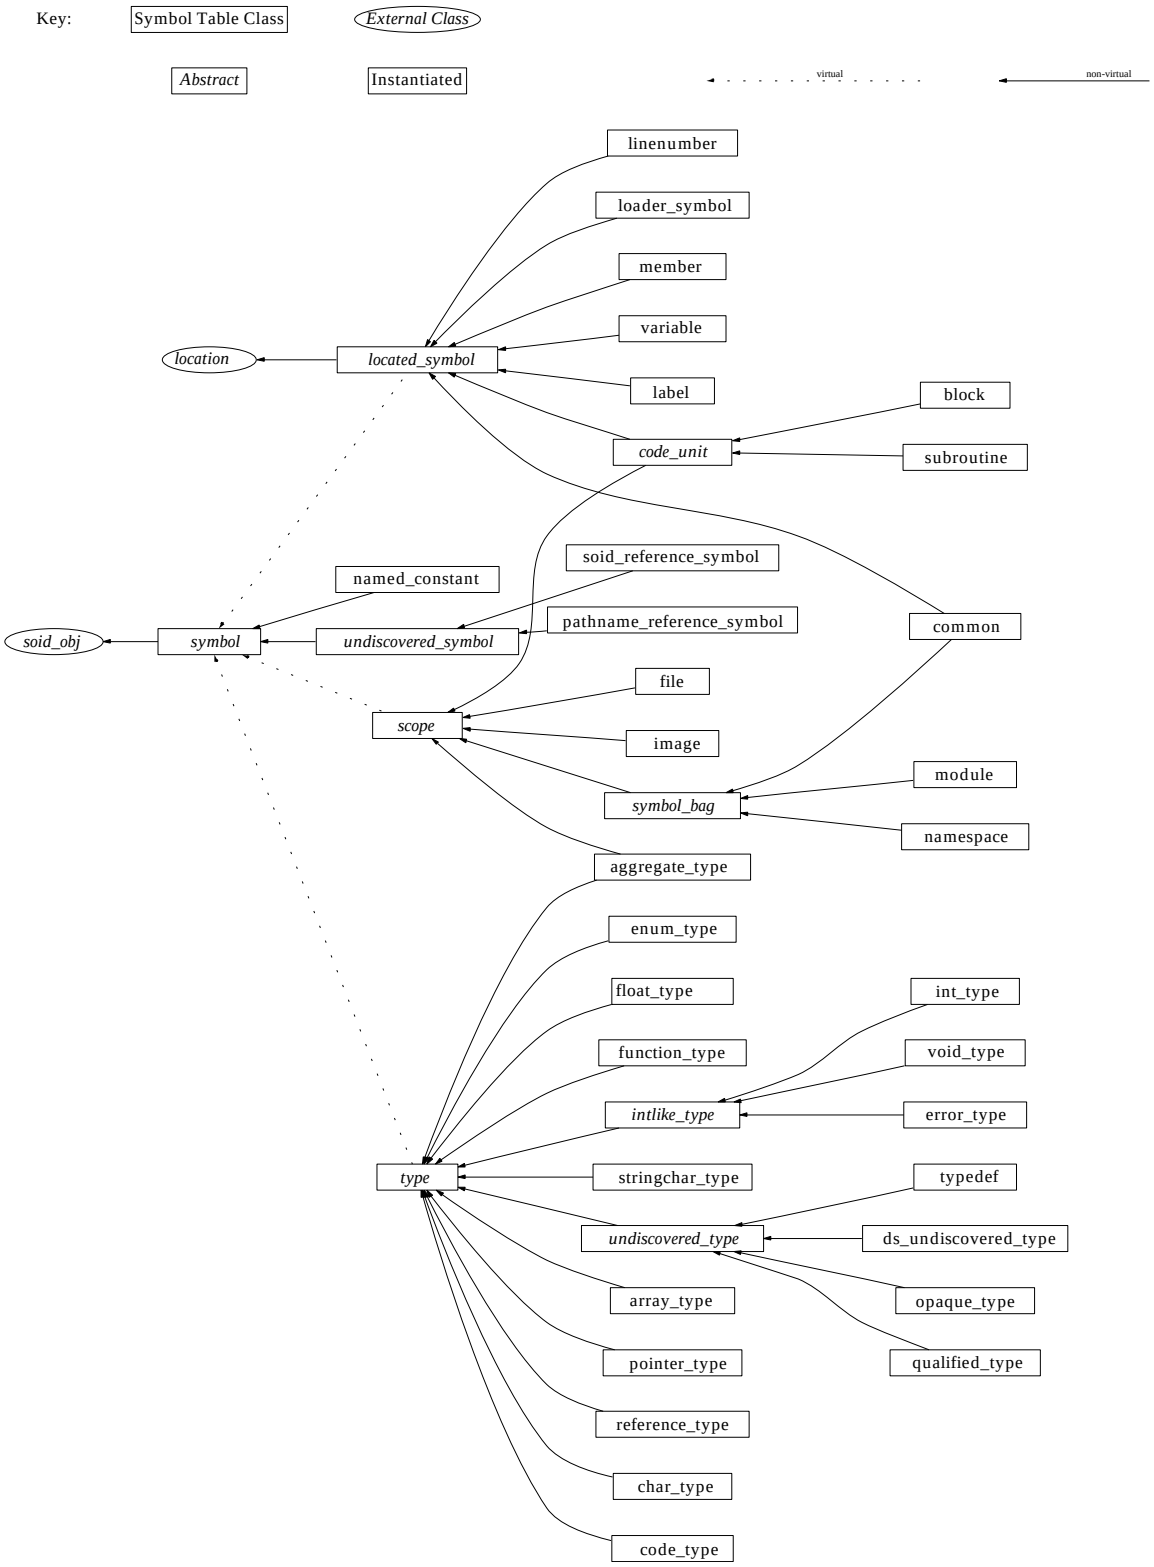
Key:
Symbol Table Class
External Class
Abstract
Instantiated
virtual
non-virtual
linenumber
loader_symbol
member
variable
location
located_symbol
label
block
code_unit
subroutine
soid_reference_symbol
named_constant
pathname_reference_symbol
common
soid_obj
symbol
undiscovered_symbol
file
scope
image
module
symbol_bag
namespace
aggregate_type
enum_type
float_type
int_type
function_type
void_type
intlike_type
error_type
type
stringchar_type
typedef
undiscovered_type
ds_undiscovered_type
array_type
opaque_type
pointer_type
qualified_type
reference_type
char_type
code_type

**data_addressing** Contains additional operands to get from the base of an object to its data; for example, a Fortran by-desc array contains a descriptor data structure. The variable points to the descriptor. If you do an **addc** operation on the descriptor, you can then do an **indirect** operation to locate the data.

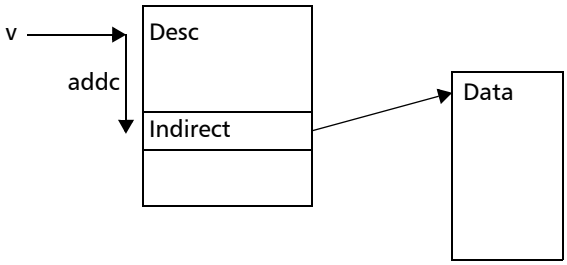


**delayed_symbol** Indicates if a symbol has been full or partially read-in. The following constants are or'd and returned: **skim**, **index**, **line**, and **full**.

**demangler** The name of demangler used by your compiler.

**element_addressing** The location containing additional operands that let you go from the data's base location to an element.

**enumerators** Name of the enumerator tags. For example, if you have something like **enum[R,G,B]**, the tags would be **R**, **G**, and **B**.

**external_name** When used in data types, it translates the object structure to the type name for the language. For example, if you have a pointer that points to an **int**, the external name is **int ***.

**full_pathname** This is the # separated static path to the variable; for example, **##image#file#externalname**... .

**id** The internal object handle for the symbol. These symbols always take the form *number|number.*

**index_type_index** The array type's index **type_index**; for example, this indicates if the index is a 16-, 32-, 64-bit, and so on.

**inheritance** For C++ variables, this string is as follows:
**[ virtual ] [ { private | protected | public } ]**
**[ base class ]**

**is_argument** A true/false value indicating if a variable was a parameter (dummy variable) passed into the function.

**kind** One of the symbol types listed in the first column of the previous table.

**language** A string containing a value such as C, C++, or Fortran.

**length** The byte size of the object. For example, this might represent the size of an array or a subroutine.

**location** The location in memory where an object's storage begins.

**logical_scope_owner**
The current scope's owner as defined by the language's rules.

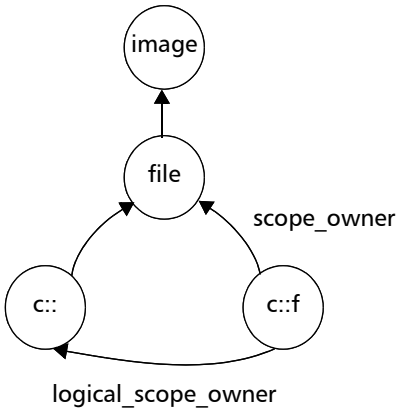


**lookup_scope** This is a pathname reference symbol that refers to the scope in which to look up a pathname.

**lower_bound** The location containing the array's lower bound. This is a numeric value, not the location of the first array item.

**ordinal** The order in which a member or variable occurred within a scope.

**qualification** A qualifier to a data type such as **const** or **volatile**. These can be chained together if there is more than one qualifier.

volatile const int




**resolved_symbol_id**
The soid to lookup in a soid reference symbol.

**resolved_symbol_pathname**
The pathname to lookup in a fortran reference symbol.

**return_type_index**
The data type of the value returned by a function.

**scope_owner** The ID of the symbol's scope owner. (This is illustrated by the figure within the **logical_scope_owner** definition.)

**static_chain** The location of a static link for nested subroutines.

**static_chain_height**
For nested subroutines, this indicates the nesting level.

**stride_bound** Location of the value indicating an array's stride.

**submembers** If you have an array of aggregates or pointers and you have already dived on it, this property gives you a list of {*name type*} tuples where **name** is the name of the member of the array (or * if it's an array of pointers),

and **type** is the soid of the type that should be used to dive in all into that field.

**target_type_index**
The type of the following entities: **array**, **ds_undiscovered_type**, **pointer**, and **typedef**.

**type_index**
One of the following: **member**, **variable**, or **named_constant**.

**upper_bound**
The location of the value indicating an array's upper bound or extent.

**validator**
The name of an array or pointer validator. This looks at an array descriptor or pointer to determine if it is allocated and associated.

**value**
For enumerators, this indicates the item's value in hexadecimal bytes.

**value_size**
For enumerators, this indicates the length in bytes

## Symbol Namespaces

The symbols described in the previous section all reside within namespaces. Like symbols, namespaces also have properties. The figure on the next page illustrates how these namespaces are related.

The following table lists the properties associated with a namespace.

| Symbol Namespaces | Properties | |
|---|---|---|
| block_symname | base_name | |
| c_global_symname | base_name | loader_name |
| | loader_file_path | |
| c_local_symname | base_name | |
| c_type_symname | base_name | type_index |
| cplus_global_symname | base_name | cplus_template_types |
| | cplus_class_name | cplus_type_name |
| | cplus_local_name | loader_file_path |
| | cplus_overload_list | loader_name |
| cplus_local_symname | base_name | cplus_overload_list |
| | cplus_class_name | cplus_template_types |
| | cplus_local_name | cplus_type_name |
| cplus_type_symname | base_name | cplus_template_types |
| | cplus_class_name | cplus_type_name |
| | cplus_local_name | type_index |
| | cplus_overload_list | |
| file_symname | base_name | directory_path |
| | directory_hint | |
| fortran_global_symname | base_name | loader_file_path |
| | fortran_module_name | loader_name |
| | fortran_parent_function_name | |
| fortran_local_symname | base_name | |
| | fortran_parent_function_name | |
| | fortran_module_name | |

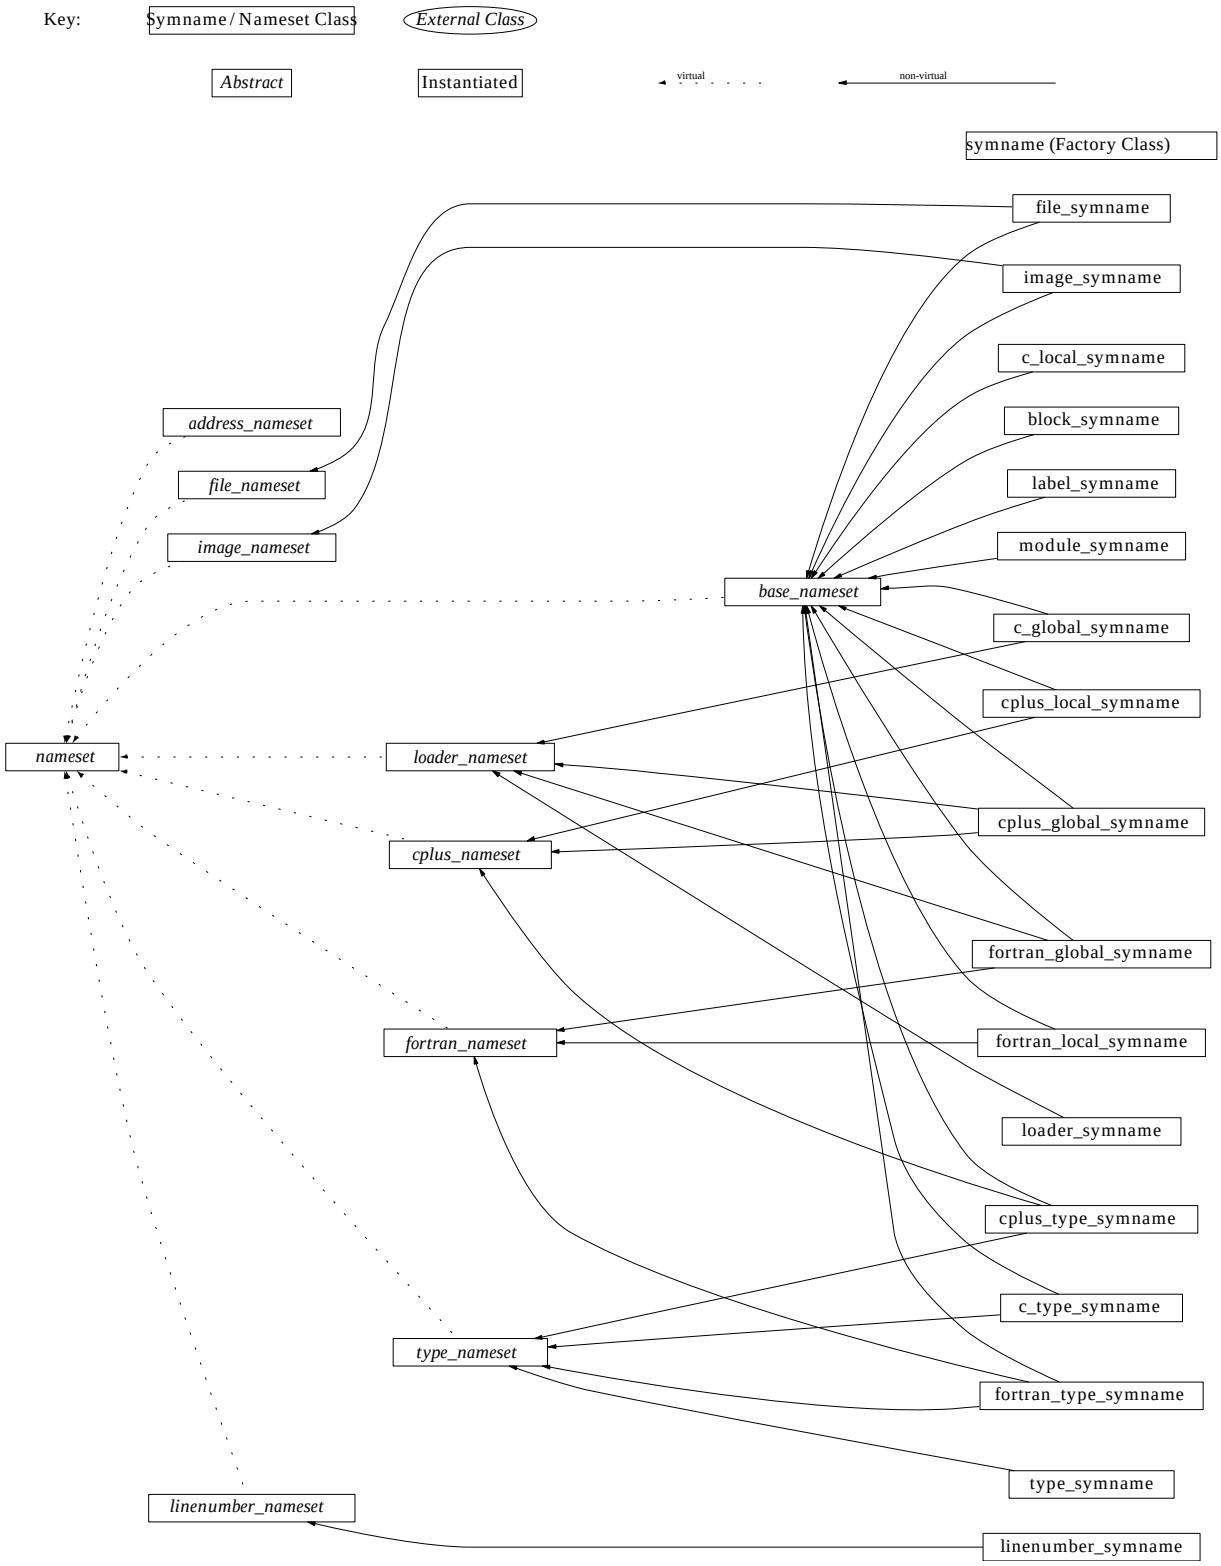
Key:
Symname / Nameset Class
External Class
Abstract
Instantiated
virtual
non-virtual
symname (Factory Class)
file_symname
image_symname
c_local_symname
block_symname
label_symname
module_symname
c_global_symname
cplus_local_symname
cplus_global_symname
fortran_global_symname
fortran_local_symname
loader_symname
cplus_type_symname
c_type_symname
fortran_type_symname
type_symname
linenumber_symname
address_nameset
file_nameset
image_nameset
base_nameset
nameset
loader_nameset
cplus_nameset
fortran_nameset
type_nameset
linenumber_nameset

| Symbol Namespaces | Properties | |
|---|---|---|
| fortran_type_symname | base_name | fortran_parent_function_name |
| | fortran_module_name | type_index |
| image_symname | base_name | member_name |
| | directory_path | node_name |
| label_symname | base_name | |
| linenumber_symname | linenumber | |
| loader_symname | loader_file_path | loader_name |
| module_symname | base_name | |
| type_symname | type_index | |

Many of the following properties are used in more than one namespace. The explanations for these properties will assume a limited context as their use is similar. Some of these definitions assume that you're are looking at the following function prototype:

```
void c::foo<int>(int &)
```

**base_name**
The name of the function; for example, **foo**.

**cplus_class_name**
The C++ class name; for example, c.

**cplus_local_name**
Not used.

**cplus_overload_list**
The function's signature; for example, **int &**.

**cplus_template_types**
The template used to instantiate the function; for example: **<int>**.

**cplus_type_name**
The data type of the returned value; for example, *void*.

**directory_hint**
The directory to which you were attached when you started TotalView.

**directory_path**
Your file's pathname as it is named within your program.

**fortran_module_name**
The name of your module. Typically, this looks like **module'var** or **module'subr'var**.

**fortran_parent_function_name**
The parent of the subroutine. For example, the parent is **module** in a reference such as **module'subr**. If you have an inner subroutine, the parent is the outer subroutine.

**linenumber**
The line number at which something occurred.

**loader_file_path**
The file's pathname.

**loader_name**
The mangled name.

**member_name**
In a library, you might have an object reference; for example, **libC.a(foo.so)**. **foo.so** is the member name.

| | |
|---|---|
| node_name | Not used. |
| type_index | A handle that points to the type definition. It's format is <number,number,number>. |

## thread

Gets and sets thread properties

*Format*: TV::thread *action* [ *object-id* ] [ *other-args* ]

*Arguments*:

*action* — The action to perform, as follows:

- **commands** — Displays the subcommands that you can use. The CLI responds by displaying these four *action* subcommands. Do not use other arguments with this option.
- **get** — Gets the values of one or more thread properties. The *other-args* argument can include one or more property names. The CLI returns these values in a list, and places them in the same order as the names you enter.

  If you use the **–all** option instead of *object-id*, the CLI returns a list containing one (sublist) element for each object.
- **properties** — Lists an object's properties. Do not use other arguments with this option.
- **set** — Sets the values of one or more properties. The *other-args* argument contains paired property names and values.

*object-id* — A thread ID. If you use the **–all** option, the operation is carried out on all threads in the current focus.

*other-args* — Arguments required by the **get** and **set** subcommands.

*Description*: The **TV::thread** command lets you examine and set the following thread properties and states:

- **continuation_sig** — The signal to pass to a thread the next time it runs. On some systems, the thread receiving the signal might not always be the one for which this property was set.
- **dpid** — The ID of the process associated with a thread.
- **duid** — The internal unique ID associated with the thread.
- **held** — A Boolean value (either **1** or **0**) indicating if the thread is held. (**1** means that the thread is held.) (settable)
- **id** — The ID of the thread.
- **manager** — A Boolean value (either **1** or **0**) indicating if this is a system manger thread. (**1** means that it is a system manager thread.)
- **pc** — The current PC at which the target is executing. (settable)
- **sp** — The value of the stack pointer.
- **state** — The current state of the target. See **state_values** for a list of states.
- **state_values** — A list of values for the **state** property: **break**, **error**, **exited**, **running**, **stopped**, and **watch**.
- **systid** — The system thread ID.

*Examples*: `f p3 TV::thread get -all id`

Returns a list of thread IDs for process 3; for example:

`1.1 1.2 1.4`

## type

Gets and sets type properties

*Format:* TV::type *action* [ *object-id* ] [ *other-args* ]

*Arguments:*

*action* — The action to perform, as follows:

- **commands** — Displays the subcommands that you can use. The CLI responds by displaying these four *action* subcommands. Do not use other arguments with this option.
- **get** — Gets the values of one or more type properties. The *other-args* argument can include one or more property names. The CLI returns these values in a list, and places them in the same order as the names you enter.

  If you use the **–all** option instead of *object-id*, the CLI returns a list containing one (sublist) element for each object.
- **properties** — Lists a type's properties. Do not use other arguments with this option.
- **set** — Sets the values of one or more type properties. The *other-args* argument contains paired property names and values.

*object-id* — An identifier for an object; for example, **1** represents process 1, and **1.1** represents thread 1 in process 1. If you use the **–all** option, the operation is carried out on all objects of this class in the current focus.

*other-args* — Arguments required by the **get** and **set** subcommands.

*Description:* The **TV::type** command lets you examine and set the following type properties and states:

- **enum_values** — For an enumerated type, a list of **{name value}** pairs giving the definition of the enumeration. If you apply this to a non-enumerated type, the CLI returns an empty list.
- **id** — The ID of the object.
- **image_id** — The ID of the image in which this type is defined.
- **language** — The language of the type.
- **length** — The length of the type.
- **name** — The name of the type; for example, **class foo**.
- **prototype** — The ID for the prototype. If the object is not prototyped, the returned value is **{}**.
- **rank** — (array types only) The rank of the array.
- **struct_fields** — (**class**/**struct**/**union** types only). A list of lists that contains descriptions of all the type's fields. Each sublist contains the following fields:

  { *name type_id addressing properties* }

where:

*name* is the name of the field.

*type_id* is simply the *type_id* of the field.

*addressing* contains additional addressing information that points to the base of the field.

*properties* contains an additional list of properties in the following format:

**"[virtual] [public|private|protected] base class"**

If no properties apply, this string is null.

If you use **get struct_fields** for a type that is not a **class**, **struct**, or **union**, the CLI returns an empty list.

**target** For an array or pointer type, returns the ID of the array member or target of the pointer. If you do not apply a command that uses this argument to one of these types, the CLI returns an empty list.

**type** Returns a string describing this type; for example, **signed integer**.

**type_values** Returns all possible values for the **type** property.

*Examples:* `TV::type get 1|25 length target`

Finds the length of a type and, assuming it is a pointer or an array type, the target type. The result might look something like:

**4 1|12**

The following example uses the **TV::type properties** command to obtain the list of properties. It begins by defining a procedure:

```
proc print_type {id} {
   foreach p [TV::type   properties] {
      puts [format "%13s  %s" $p [TV::type get $id $p]]
   }
}
```

You then display information with the following command:

```
print_type 1|6
```

```
enum_values
id                    1|6
image_id              1|1
language              f77
length                4
name                  <integer>
prototype
rank                  0
struct_fields
target
type                  Signed Integer
type_values           {Array} {Array of characters}
                      {Enumeration}...
```

## type_transformation

Creates type transformations and examines properties

*Format:* TV::type_transformation *action* [ *object-id* ] [ *other-args* ]

*Arguments:*

*action* The action to perform, as follows:

**commands** Displays the subcommands that you can use. The CLI responds by displaying the subcommands shown here. Do not use additional arguments with this subcommand.

**create** Creates a new transformation object. The *object-id* argument is not used; *other-args* is **Array**, **List**, **Map**, or **Struct**, indicating the type of transformation being created. You can change a transformation's properties up to the time you install it. After being installed, you can longer change them.

**get** Gets the values of one or more transformation properties. The *other-args* argument can include one or more property names. The CLI returns these property values in a list whose order is the same as the property names you entered.

If you use the **-all** option instead of *object-id*, the CLI returns a list containing one (sublist) element for the object.

**properties** Displays the properties that the CLI can access. Do not use additional arguments with this option. These properties are discussed later in this section.

**set** Sets the values of one or more properties. The *other-args* argument consists of pairs of property names and values. The argument pairs that you can set are listed later in this section.

**object-id** The type transformation ID. This value is returned when you crate a new transformation; for example, **1** represents process 1. If you use the **-all** option, the operation executes upon all objects of this class in the current focus.

*other-args* Arguments required by **get** and **set** subcommands.

*Description:* The **TV::type_transformation** command lets you define and examine properties of a type transformation. The states and properties you can set are:

**addressing_callback**

Names the procedure that locates the address of the start of an array. The call structure for this callback is:

**addressing_callback** *id*

where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

This callback defines a TotalView addressing expression that computes the starting address of an array's first element.

**compiler**
Reserved for future use.

**id**
The type transformation ID returned from a **create** operation.

**language**
The language property specifies source language for the code of the aggregate type (class) to transform. This is always C++.

**list_element_count_addressing_callback**
Names the procedure that determines the total number of elements in a list. The call structure for this callback is:

**list_element_count_addressing_callback** *id*

where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

This callback defines an addressing expression that specifies how to get to the member of the symbol that specifies the number of elements in the list.

If your data structure does not have this element, you still must use this callback. In this case, simply return **{nop}** as the addressing expression and the transformation will count the elements by following all the pointers. This can be very time consuming.

**list_element_data_addressing_callback**
Names the procedure that defines an addressing expression that specifies how to access the data member of a list element. The call structure for this callback is:

**list_element_data_addressing_callback** *id*

where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

**list_element_next_addressing_callback**
Names the procedure that defines an addressing expression that specifies how to access the next element of a list. The call structure for this callback is:

**list_element_next_addressing_callback** *id*

where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

**list_element_prev_addressing_callback**
Names the procedure that defines an addressing expression that specifies how to access the previous element of a list. The call structure for this callback is:

**list_element_prev_addressing_callback** *id*

where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

This property is optional. For example, you would not use it in a singly linked list.

**list_end_value**
Specifies if a list is terminated by NULL or the head of the list. Enter one of the following: **NULL** or **ListHead**

**list_first_element_addressing_callback**
Names the procedure that defines an addressing expression that specifies how to go from the head element of the list to the first element of the list. It is not always the case that the head element of the list is the first element of the list. The call structure for this callback is:

**list_element_first_element_addressing_callback** *id*

where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

**list_head_addressing_callback**
Names the procedure that defines an addressing expression to obtain the head element of the linked list. The call structure for this callback is:

**list_head_addressing_callback** *id*

where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

**lower_bounds_callback**
Names the procedure that obtains a lower bound value for the array type being transformed. For C/C++ arrays, this value is always 0. The call structure for this callback is:

**lower_bounds_callback** *id*

where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

**name**
Contains a regular expression that checks to see if a symbol is eligible for type transformation. This regular expression must match the definition of the aggregate type (class) being transformed.

**type_callback**
The **type_callback** property is used in two ways.

(1) When it is used within a list or vector transformation, it names the procedure that determines the type of the list or vector element. The callback procedure takes one parameter, the symbol ID of the symbol that was validated during the callback to the procedure specified by the **validate_callback**. The call structure for this callback is:

**type_callback** *id*

where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

(2) When it is used within a struct transformation, it names the procedure that specifies the data type to be used when displaying the struct.

type_transformation_description
: A string containing a description of what is being transformed; for example, you might enter "GNU Vector".

upper_bounds_callback
: Names the procedure that defines an addressing expression that computes the extent (number of elements) in an array. The call structure for this callback is:

  upper_bounds_callback *id*

  where *id* is the symbol ID of the symbol that was validated using the **validate_callback**'s procedure.

validate_callback
: Names a procedure that is called when a data type matches the regular expression specified in the **name** property. The call structure for this callback is:

  validate_callback *id*

  where *id* is the symbol ID of the symbol being validated.

  Your callback procedure check the symbol's structure to insure that it should be transformed. While not required, most users will extract symbol information such as its type and its data members while validating the data type. The callback procedure must return a Boolean value, where *true* means the symbol is valid and can be transformed.

# TotalView Variables 4

This chapter contains a list of all CLI and TotalView variables. This chapter has three sections, each corresponding to a CLI namespace, as follows:

- Top-Level (::) Namespace
- TV:: Namespace
- TV::GUI:: Namespace

## Top-Level (::) Namespace

**ARGS(*dpid*)**

Contains the arguments that TotalView passes to the process with TotalView ID *dpid* the next time you start the process.

*Permitted Values*: A string
*Default*: None

**ARGS_DEFAULT**

Contains the argument passed to a new process when no ARGS(*dpid*) variable is defined.

*Permitted Values*: A string
*Default*: None

**BARRIER_STOP_ALL**

Contains the value for the "stop_when_done" property for newly created action points. This property tells TotalView what else it should stop when a barrier point is satisfied. This property also tells TotalView what else it should stop when a thread encounters this action point. You can also set this value using the **When barrier hit, stop** value in the **Action Points** Page of the **File > Preferences** Dialog Box. The values that you can use are as follows:

group — TotalView will stop all processes in a thread's control group when a thread reaches a barrier created using this as a default.

**process** TotalView will stop the process in which the thread is running when a thread reaches a barrier created using this default.

**none** TotalView just stops the thread that hit a barrier created using this default.

This variable is the same as the **TV::barrier_stop_all** variable.

*Permitted Values*: **group**, **process**, or **thread**
*Default*: **group**

## BARRIER_STOP_WHEN_DONE

Contains the default value that TotalView uses when a barrier point is satisfied. You can also set this value if you use the **–stop_when_done** command-line option or the **When barrier done, stop** value in the **Action Points** Page of the **File > Preferences** Dialog Box. The values you can use are as follows:

**group** When a barrier is satisfied, TotalView stops all processes in the control group.

**process** When a barrier is satisfied, TotalView stops the processes in the satisfaction set.

**none** TotalView only stops the threads in the satisfaction set; other threads are not affected. For process barriers, there is no difference between **process** and **none**.

In all cases, TotalView releases the satisfaction set when the barrier is satisfied.

This variable is the same as the **TV::barrier_stop_when_done** variable.

*Permitted Values*: **group**, **process**, or **thread**
*Default*: **group**

## CGROUP(*dpid*)

Contains the control group for the process with the TotalView ID *dpid*. Setting this variable moves process *dpid* into a different control group. For example, the following command moves process 3 into the same group as process 1:

```
dset CGROUP(3) $CGROUP(1)
```

*Permitted Values*: A number
*Default*: None

## COMMAND_EDITING

Enables some Emacs-like commands that you can use while editing text in the CLI. These editing commands are always available in the CLI window of the TotalView GUI. However, they are only available in the stand-alone CLI if the terminal in which you are running it supports cursor positioning and clear-to-end-of-line. The commands that you can use are:

^**A**: Moves the cursor to the beginning of the line.

^**B**: Moves the cursor one character backward.

^**D**: Deletes the character to the right of cursor.

^**E**: Moves the cursor to the end of the line.

^**F**: Moves the cursor one character forward.

^**K**: Deletes all text to the end of line.

^**N**: Retrieves the next entered command (only works after ^P).

^**P**: Retrieves the previously entered command.

^**R** or ^**L**: Redraws the line.

^**U**: Deletes all text from the cursor to the beginning of the line.

**Rubout** or **Backspace**: Deletes the character to the left of the cursor.

*Permitted Values*: true or false
*Default*: false

**EXECUTABLE_PATH**

Contains a colon-separated list containing the directories that TotalView searches when it looks for source and executable files.

*Permitted Values*: Any directory or directory path. To include the current setting, use $EXECUTABLE_PATH.
*Default*: . (dot)

**GROUP(*gid*)**

Contains a list containing the TotalView IDs for all members in group *gid*.

The first element in the list indicates what kind of group it is, as follows:

| | |
|---|---|
| control | The group of all processes in a program |
| lockstep | A group of threads that share the same PC |
| process | A user-created process group |
| share | The group of processes in one program that share the same executable image |
| thread | A user-created thread group |
| workers | The group of worker threads in a program |

Elements that follow are either *pid*s (for process groups) or *pid.tid* pairs (for thread groups).

The *gid* is a simple number for most groups. In contrast, a lockstep group's ID number is of the form *pid.tid*. Thus, GROUP(2.3) contains the lockstep group for thread 3 in process 2. Note, however, that the CLI will not display lockstep groups when you use dset with no arguments—they are hidden variables.

The GROUP(*id*) variable is read-only.

*Permitted Values*: A Tcl array of lists indexed by the group ID. Each entry contains the members of one group.
*Default*: None

**GROUPS**

Contains a list that contains all TotalView groups IDs. Lockstep groups are not contained in this list. This is a read-only value and cannot be set.

*Permitted Values*: A Tcl list of IDs.

**LINES_PER_SCREEN**

Defines the number of lines shown before the CLI stops printing information and displays its more prompt. The following values have special meaning:

| | |
|---|---|
| 0 | No *more* processing occurs, and the printing does not stop when the screen fills with data. |

| | |
|---|---|
| NONE | This is a synonym for 0. |
| AUTO | The CLI uses the tty settings to determine the number of lines to display. This may not work in all cases. For example, Emacs sets the **tty** value to 0. If **AUTO** works improperly, you will need to explicitly set a value. |

*Permitted Values*: A positive integer, or the **AUTO** or **NONE** strings
*Default*: **Auto**

**MAX_LEVELS**

Defines the maximum number of levels that the **dwhere** command will display.

*Permitted Values*: A positive integer
*Default*: 512

**MAX_LIST**

Defines the number of lines that the **dlist** command will display.

*Permitted Values*: A positive integer
*Default*: 20

**PROCESS(*dpid*)**

Contains a list of information associated with a dpid. This is a read-only value and cannot be set.

*Permitted Values*: An integer
*Default*: None

**PROMPT**

Defines the CLI prompt. If you use brackets ([ ]) in the prompt, TotalView assumes the information within the brackets is a Tcl command and evaluates this information before it creates the prompt string.

*Permitted Values*: Any string. If you wish to access the value of **PTSET**, you must place the variable within brackets; that is, **[dset PTSET]**.
*Default*: **{[dfocus]> }**

**PTSET**

Contains the current focus. This is a read-only value and cannot be set.

*Permitted Values*: A string
*Default*: **d1.<**

**SGROUP(*pid*)**

Contains the group ID of the share group for process *pid*. TotalView decides which share group this is by looking at the control group for the process and the executable associated with this process. You cannot directly modify this group.

*Permitted Values*: A number
*Default*: None

**SHARE_ACTION_POINT**

Indicates the scope in which TotalView places newly created action points. In the CLI, this is the **dbarrier**, **dbreak**, and **dwatch** commands. If this Boolean value is **true**, newly created action point are shared across the group. If it is **false**, a newly created action point is only active in the process in which it is set.

As an alternative to setting this variable, you can select the **Plant in share group** check box in the **Action Points** Page in the **File > Preferences** Dialog

Box. You can override this value in the GUI by using selecting the **Plant in share group** checkbox in the **Action Point** > **Properties** Dialog Box.

*Permitted Values*: **true** or **false**
*Default*: **true**

**STOP_ALL**

Indicates a default property for newly created action points. This property tells TotalView what else it should stop when it encounters this action point. The values you can set are as follows:

| | |
|---|---|
| **group** | Stops the entire control group when the action point is hit. |
| **process** | Stops the entire process when the action point is hit. |
| **thread** | Only stops the thread that hit the action point. Note that **none** is a synonym for **thread**. |

*Permitted Values*: **group**, **process**, or **thread**
*Default*: **process**

**TAB_WIDTH**

Indicates the number of spaces used to simulate a tab character when the CLI displays information.

*Permitted Values*: A positive number. A value of –1 indicates that the CLI does not simulate tab expansion.
*Default*: 8

**THREADS(*pid*)**

Contains a list of all threads in the process *pid*, in the form **{pid.1 pid.2 ...}**. This is a read-only variable and cannot be set.

*Permitted Values*: A Tcl list
*Default*: None

**TOTALVIEW_ROOT_PATH**

Names the directory in which the TotalView executable is located. This is a read-only variable and cannot be set. This variable is exported as **TVROOT**, and is can be used in launch strings.

*Permitted Values*: The location of the TotalView installation directory

**TOTALVIEW_TCLLIB_PATH**

Contains a list containing the directories in which the CLI searches for TCL library components.

*Permitted Values*: Any valid directory or directory path. To include the current setting, use **$TOTALVIEW_TCLLIB_PATH**.
*Default*: The directory containing the CLI's Tcl libraries

**TOTALVIEW_VERSION**

Contains the version number and the type of computer architecture upon which TotalView is executing. This is a read-only variable and cannot be set.

*Permitted Values*: A string containing the platform and string
*Default*: Platform-specific

**VERBOSE**

Controls the error message information displayed by the CLI. The values for this variable can be:

| | |
|---|---|
| info | Prints errors, warnings, and informational messages. Informational messages include data on dynamic libraries and symbols. |
| warning | Only print errors and warnings. |
| error | Only print error messages. |
| silent | Does not print error, warning, and informational messages. This also shuts off the printing of results from CLI commands. This should only be used when the CLI is run in batch mode. |

*Permitted Values*: **info**, **warning**, **error**, and **silent**
*Default*: **info**

**WGROUP(*pid*)**

The group ID of the thread group of worker threads associated with the process *pid*. This variable is read-only.

*Permitted Values*: A number
*Default*: None

**WGROUP(*pid.tid*)**

Contains one of the following:

- The group ID of the workers group in which thread *pid.tid* is a member
- 0 (zero), which indicates that thread *pid.tid* is not a worker thread

Storing a nonzero value in this variable marks a thread as a worker. In this case, the returned value is the ID of the workers group associated with the control group, regardless of the actual nonzero value that you had assigned to it.

*Permitted Values*: A number representing the *pid.tid*
*Default*: None

## TV:: Namespace

**TV::ask_on_dlopen**

Setting this variable to **true** tells TotalView that it should ask you about stopping processes that use the **dlopen** or **load** (AIX only) system calls dynamically load a new shared library.

If this is set to **false**, TotalView will not ask about stopping a process that dynamically loads a shared library.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::auto_array_cast_bounds**

Indicates the number of array elements that are displayed when the **TV::auto_array_cast_enabled** variable is set to **true**. This is the variable set by the **Bounds** field of the **Pointer Dive** Page in the **File** > **Preferences** Dialog Box.

*Permitted Values*: An array specification
*Default*: **[10]**

**TV::auto_array_cast_enabled**

When this is set to **true**, TotalView will automatically dereference a pointer into an array. The number of array elements is indicated in the **TV::auto_array_cast_bounds** variable. This is the variable set by the **Cast dereferenced C pointers to array string** checkbox of the **Pointer Dive** Page in the **File > Preferences** Dialog Box.

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::auto_deref_in_all_c**

Tells TotalView if and how it should dereference C and C++ pointers when you perform a **View > Dive in All** operation, as follows:

| | |
|---|---|
| yes_dont_push | While automatic dereferencing will occur, you can't use the **Undive** command to see the undereferenced value when performing a **Dive in All** operation. |
| yes | You will be able to use the **Undive** control to see undereferenced values. |
| no | Do not automatically dereference values when performing a **Dive in All** operation. |

This is the variable set when you select the "Dive in All" element in the **Pointer Dive** Page of the **File > Preferences** Dialog Box.

*Permitted Values*: **no**, **yes**, or **yes_dont_push**
*Default*: **no**

**TV::auto_deref_in_all_fortran**

Tells TotalView if and how it should dereference Fortran pointers when you perform a **Dive in All** operation, as follows:

| | |
|---|---|
| yes_dont_push | While automatic dereferencing will occur, you can't use the **Undive** command to see the undereferenced value when performing a **Dive in All** operation. |
| yes | You will be able to use the **Undive** control to see undereference values. |
| no | Do not automatically dereference values when performing a **Dive in All** operation. |

This is the variable set when you select the **Dive in All** element in the **Pointer Dive** Page of the **File > Preferences** Dialog Box.

*Permitted Values*: **no**, **yes**, or **yes_dont_push**
*Default*: **no**

**TV::auto_deref_initial_c**

Tells TotalView if and how it should dereference C pointers when they are displayed, as follows:

| | |
|---|---|
| yes_dont_push | While automatic dereferencing will occur, you can't use the **Undive** command to see the undereferenced value. |
| yes | You will be able to use the **Undive** control to see undereferenced values. |
| no | Do not automatically dereference values. |

This is the variable set when you select the **initially** element in the **Pointer Dive** Page of the **File > Preferences** Dialog Box.

*Permitted Values*: **no**, **yes**, or **yes_dont_push**
*Default*: **no**

### TV::auto_deref_initial_fortran

Tells TotalView if and how it should dereference Fortran pointers when they are displayed, as follows:

| | |
|---|---|
| **yes_dont_push** | While automatic dereferencing will occur, you can't use the **Undive** command to see the undereferenced value. |
| **yes** | You will be able to use the **Undive** control to see undereferenced values. |
| **no** | Do not automatically dereference values. |

This is the variable set when you select the **initially** element in the **Pointer Dive** Page of the **File > Preferences** Dialog Box.

*Permitted Values*: **no**, **yes**, or **yes_dont_push**
*Default*: **no**

### TV::auto_deref_nested_c

Tells TotalView if and how it should dereference C pointers when you dive on structure elements:

| | |
|---|---|
| **yes_dont_push** | While automatic dereferencing will occur, you can't use the **Undive** command to see the undereferenced value. |
| **yes** | You will be able to use the **Undive** control to see undereferenced values. |
| **no** | Do not automatically dereference values. |

This is the variable set when you select the **from an aggregate** element in the **Pointer Dive** Page of the **File > Preferences** Dialog Box.

*Permitted Values*: **no**, **yes**, or **yes_dont_push**
*Default*: **yes_dont_push**

### TV::auto_deref_nested_fortran

Tells TotalView if and how it should dereference Fortran pointers when they are displayed, as follows:

| | |
|---|---|
| **yes_dont_push** | While automatic dereferencing will occur, you can't use the **Undive** command to see the undereferenced value. |
| **yes** | You will be able to use the **Undive** control to see undereferenced values. |
| **no** | Do not automatically dereference values. |

This is the variable set when you select the **from an aggregate** element in the **Pointer Dive** Page of the **File > Preferences** Dialog Box.

*Permitted Values*: **no**, **yes**, or **yes_dont_push**
*Default*: **yes_dont_push**

### TV::auto_load_breakpoints

Setting this variable to **true** tells TotalView that it should automatically load action points from the file named *filename*.TVD.v3breakpoints where *filename* is the name of the file being debugged. If the variable is set to **false**, TotalView does not automatically load your breakpoints. If you set this to

**false**, you can still load breakpoints if you use the **Action Point > Load All** or the **dactions –load** command.

*Permitted Values*: **true** or **false**
*Default*: **true**

### TV::auto_read_symbol_at_stop

Setting this variable to **false** tells TotalView that it should not automatically read symbols if execution stops when the program counter is in a library whose symbols were not read. Setting it to **true** tells TotalView that it should read in loader and debugging symbols. You would set it to **false** if you have prevented symbol reading using either the **TV::dll_read_loader_symbols_only** or **TV::dll_read_no_symbols** variables (or the preference within the GUI) and reading these symbols is both unnecessary and would affect performance.

*Permitted Values*: **true** or **false**
*Default*: **true**

### TV::auto_save_breakpoints

Setting this variable to **true** tells TotalView that it should automatically write information about breakpoints to a file named *filename*.**TVD.v3breakpoints** where *filename* is the name of the file being debugged. Information about watchpoints is not saved.

TotalView writes this information when you exit from TotalView. If this variable is set to **false**, you can explicitly save this information by using the **Action Point > Save All** or the **dactions –save** command.

*Permitted Values*: **true** or **false**
*Default*: **false**

### TV::barrier_stop_all

Contains the value for the "stop_all" property for newly created action points. This property tells TotalView what else it should stop when a thread encounters this action point. You can also set this value using the **–stop_all** command-line option or the **When barrier hit, stop** value in the **Action Points** Page of the **File > Preferences** Dialog Box. The values that you can use are as follows:

| | |
|---|---|
| **group** | TotalView will stop all processes in a thread's control group when a thread reaches a barrier created using this as a default. |
| **process** | TotalView will stop the process in which the thread is running when a thread reaches a barrier created using this default. |
| **none** | TotalView just stops the thread that hit a barrier created using this default. |

This variable is the same as the **BARRIER_STOP_ALL** variable.

*Permitted Values*: **group**, **process**, or **thread**
*Default*: **group**

**TV::barrier_stop_when_done**

Contains the value for the "stop_when_done" property for newly created action points. This property tells TotalView what else it should stop when a barrier point is satisfied. You can also set this value if you use the **–stop_when_done** command-line option or the **When barrier done, stop** value in the **Action Points** Page of the **File > Preferences** Dialog Box. The values you can use are as follows:

| | |
|---|---|
| **group** | When a barrier is satisfied, TotalView stops all processes in the control group. |
| **process** | When a barrier is satisfied, TotalView stops the processes in the satisfaction set. |
| **none** | TotalView only stops the threads in the satisfaction set; other threads are not affected. For process barriers, there is no difference between **process** and **none**. |

In all cases, TotalView releases the satisfaction set when the barrier is satisfied.

This variable is the same as the **BARRIER_STOP_WHEN_DONE** variable.

*Permitted Values*: **group**, **process**, or **thread**
*Default*: **group**

**TV::bulk_launch_base_timeout**

Defines the base timeout period used when TotalView executes a bulk server launch.

*Permitted Values*: A number from 1 to 3600 (1 hour)
*Default*: 20

**TV::bulk_launch_enabled**

When this is set to **true**, tells TotalView that it should use its bulk launch features when it automatically launches the TotalView Debugger Server (**tvdsvr**) for remote processes.

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::bulk_launch_incr_timeout**

Defines the incremental timeout period that TotalView waits for process to launch when it automatically launches the TotalView Debugger Server (**tvdsvr**) using the bulk server feature.

*Permitted Values*: A number from 1 to 3600 (1 hour)
*Default*: 10

**TV::bulk_launch_string**

Defines the command that will be used to launch the TotalView Debugger Server (**tvdsvr**) when remote processes are created. For information on this launch string, see "*Replacement Characters*" on page 214.

*Permitted Values*: A string, usually contained within braces **{}**
*Default*: The default value depends upon the platform—use the **dset** command to see what this default is

**TV::bulk_launch_tmpfile1_header_line**

Defines the header line used in the first temporary file when TotalView does a bulk server launch operation. For information on this launch string, see "*Replacement Characters*" on page 214.

*Permitted Values*: A string
*Default*: None

**TV::bulk_launch_tmpfile1_host_lines**

Defines the host line used in the first temporary file when TotalView performs a bulk server launch operation. For information on this launch string, see "*Replacement Characters*" on page 214.

*Permitted Values*: A string
*Default*: %R

**TV::bulk_launch_tmpfile1_trailer_line**

Defines the trailer line used in the first temporary file when TotalView performs a bulk server launch operation. For information on this launch string, see "*Replacement Characters*" on page 214.

*Permitted Values*: A string
*Default*: None

**TV::bulk_launch_tmpfile2_header_line**

Defines the header line used in the second temporary file when TotalView performs a bulk server launch operation. For information on this launch string, see "*Replacement Characters*" on page 214.

*Permitted Values*: A string
*Default*: None

**TV::bulk_launch_tmpfile2_host_lines**

Defines the host line used in the second temporary file when TotalView does a bulk server launch operation.For information on this launch string, see "*Replacement Characters*" on page 214.

*Permitted Values*: A string
*Default*: {tvdsvr –working_directory %D –callback %L –set_pw %P –verbosity %V}

**TV::bulk_launch_tmpfile2_trailer_line**

Defines the trailer line used in the second temporary file when TotalView does a bulk server launch operation. For information on this launch string, see "*Replacement Characters*" on page 214.

*Permitted Values*: A string
*Default*: None

**TV::c_type_strings**

When set to **true**, TotalView uses C type string extensions when it displays character arrays. When **false**, TotalView uses its string type extensions.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::comline_patch_area_base**

Allocates the patch space dynamically at the given *address*. See "*Allocating Patch Space for Compiled Expressions*" in Chapter 14 of the *TotalView Users Guide*.

*Permitted Values*: A hexadecimal value indicating space accessible to TotalView
*Default*: 0xffffffffffffffff

**TV::comline_patch_area_length**

Sets the length of the dynamically allocated patch space to the specified *length*. See "*Allocating Patch Space for Compiled Expressions*" in Chapter 14 of the *TotalView Users Guide*.

*Permitted Values*: A positive number
*Default*: 0

**TV::command_editing**

Enables some Emacs-like commands that you can use while editing text in the CLI. These editing commands are always available in the CLI window of TotalView GUI. However, they are only available within the stand-alone CLI if the terminal in which you are running it supports cursor positioning and clear-to-end-of-line. The commands that you can use are:

^**A**: Moves the cursor to the beginning of the line.

^**B**: Moves the cursor one character backward.

^**D**: Deletes the character to the right of cursor.

^**E**: Moves the cursor to the end of the line.

^**F**: Moves the cursor one character forward.

^**K**: Deletes all text to the end of line.

^**N**: Retrieves the next entered command (only works after ^P).

^**P**: Retrieves the previously entered command.

^**R** or ^**L**: Redraws the line.

^**U**: Deletes all text from the cursor to the beginning of the line.

**Rubout** or **Backspace**: Deletes the character to the left of the cursor.

*Permitted Values*: true or false
*Default*: false

**TV::compile_expressions**

When this variable is set to true, TotalView enables compiled expressions. If this is set to false, TotalView interprets your expression.

If you are running on an IBM AIX system, you can use the –use_aix_fast_trap command line option to speed up the performance of compiled expressions. Check the *TotalView Release Notes* to determine if your version of the operating system supports this feature.

*Permitted Values*: true or false
*Default*: HP Alpha and IBM AIX: true
SGI IRIX: false
Not settable on other platforms

**TV::compiler_vars**

(HP Alpha, HP, and SGI only) When this is set to true, TotalView shows variables created by your Fortran compiler as well as the variables in your program. When set to false (which is the default), TotalView does not show the variables created by your compiler.

Some Fortran compilers (HP f90/f77, SGI 7.2 compilers) write debugging information that describes variables that the compiler created to assist in some operations. For example, it could create a variable used to pass the

length of **character*(*)** variables. You might want to set this variable to **true** if you are looking for a corrupted runtime descriptor.

You can override the value set to this variable in a startup file by using the following command-line options:

–**compiler_vars**: sets this variable to **true**

–**no_compiler_vars**: sets this variable to **false**

*Permitted Values*: **true** or **false**
*Default*: **false**

### TV::copyright_string

This is a read-only string containing the copyright information displayed when you start the CLI and TotalView.

### TV::current_cplus_demangler

Setting this variable overrides the C++ demangler that TotalView uses. TotalView will ignore what you set the value of this variable to unless you also set the value of the **TV::force_default_cplus_demangler** variable. You can set this variable to the following values:

- **compaq**: HP cxx on running Linux-Alpha
- **dec**: HP Tru64 C++
- **gnu**: GNU C++ on Linux Alpha
- **gnu_dot**: GNU C++ Linux x86
- **gnu_v3**: GNU C++ Linux x86
- **hp**: HP aCC compiler
- **irix**: SGI IRIX C++
- **kai**: KAI C++
- **kai3_n**: KAI C++ version 3.n
- **kai_4_0**: KAI C++
- **spro**: SunPro C++ 4.0 or 5.2
- **spro5**: SunPro C++ 5.0 or later
- **sun**: Sun CFRONT C++
- **xlc**: IBM XLC/VAC++ compilers

*Permitted Values*: A string naming the compiler
*Default*: Derived from your platform and information within your program

### TV::current_fortran_demangler

Setting this variable overrides the Fortran demangler that TotalView uses. TotalView will ignore what you set the value of this variable to unless you also set the value of the **TV::force_default_f9x_demangler** variable. You can set this variable to the following values:

- **xlf90**: IBM Fortran
- **dec**: HP Tru64 Fortran
- **decf90**: HP Tru64 Fortran 90
- **fujitsu_f9x**: Fujitsu Fortran 9x
- **hpux11_64_f9x**: HP Fortran 9x
- **intel**: Intel Fortran 9x
- **mipspro_f9x**: SGI IRIX Fortran

- **sunpro_f9x_4**: Sun ProFortran 4
- **sunpro_f9x_5**: Sun ProFortran 5

*Permitted Values*: A string naming the compiler
*Default*: Derived from your platform and information within your program

## TV::data_format_double

Defines the format TotalView uses when displaying double-precision values. This is one of a series of variables that define how TotalView displays data. The format of each is similar and is as follows:

{*presentation format-1 format-2 format 3*}

*presentation* Selects which format TotalView uses when displaying information. Note that you can display floating point information using **dec**, **hex**, and **oct** formats. You can display integers using **auto**, **dec**, and **sci** formats.

- **auto** Equivalent to the C language's **printf()** function's **%g** specifier. You can use this with integer and floating-point numbers. This format will either be **hexdec** or **dechex**, depending upon the programming language being used.
- **dec** Equivalent to the **printf()** function's **%d** specifier. You can use this with integer and floating-point numbers.
- **dechex** Displays information using the **dec** and **hex** formats. You can use this with integers.
- **hex** Equivalent to the **printf()** function's **%x** specifier. You can use this with integer and floating-point numbers.
- **hexdec** Displays information using the **hex** and **dec** formats. You can use this with integer numbers.
- **oct** Equivalent to the **printf()** function's **%o** specifier. You can use this with integer and floating-point numbers.
- **sci** Equivalent to the **printf()** function's **%e** specifier. You can use this with floating-point numbers.

*format* For integers, *format*-1 defines the decimal format, *format*-2 defines the hexadecimal format, and *format*-3 defines the octal format.

For floating point numbers, *format*-1 defines the fixed point display format, *format*-2 defines the scientific format, and format-3 defines the auto (**printf()**'s **%g**) format.

The format string is a combination of the following specifiers:

- **%** A signal indicating the beginning of a format.
- *width* A positive integer. This is the same width specifier that is used in the **printf()** function.
- **.** (period) A punctuation mark separating the width from the precision.

*precision* A positive integer. This is the same precision specifier that is used in the **printf()** function.

**#** (pound) Tells TotalView to display a 0x prefix for hexadecimal and 0 for octal formats. This isn't used within floating-point formats.

**0** (zero) Tells TotalView to pad a value with zeros. This is ignored if the number is left-justified. If you omit this character, TotalView pads the value with spaces.

– (hyphen) Tells TotalView to left-justify the value within the field's width.

*Permitted Values*: A value in the described format
*Default*: {**auto %-1.15 %-1.15 %-20.2**}

**TV::data_format_ext**

Defines the format TotalView uses when displaying extended floating point values such as long doubles.For a description of the contents of this variable, see **TV::data_format_double**.

*Permitted Values*: A value in the described format
*Default*: **{auto %-1.15 %-1.15 %-1.15}**

**TV::data_format_int16**

Defines the format TotalView uses when displaying 16-bit integer values. For a description of the contents of this variable, see **TV::data_format_double**.

*Permitted Values*: A value in the described format
*Default*: **{auto %1.1 %#6.4 %#7.6}**

**TV::data_format_int32**

Defines the format TotalView uses when displaying 32-bit integer values. For a description of the contents of this variable, see **TV::data_format_double**.

*Permitted Values*: A value in the described format
*Default*: **{auto %1.1 %#10.8 %#12.11}**

**TV::data_format_int64**

Defines the format TotalView uses when displaying 64-bit integer values. For a description of the contents of this variable, see **TV::data_format_double**.

*Permitted Values*: A value in the described format
*Default*: **{auto %1.1 %#18.16 %#23.22}**

**TV::data_format_int8**

Defines the format TotalView uses when displaying 8-bit integer values. For a description of the contents of this variable, see **TV::data_format_double**.

*Permitted Values*: A value in the described format
*Default*: **{auto %1.1 %#4.2 %#4.3}**

**TV::data_format_single**

Defines the format TotalView uses when displaying single precision, floating-point values. For a description of the contents of this variable, see **TV::data_format_double**.

*Permitted Values*: A value in the described format
*Default*: **{auto %-1.6 %-1.6 %-1.6}**

**TV::data_format_stringlen**

Defines the maximum number of characters displayed for a string.

*Permitted Values*: A positive integer number
*Default*: 100

**TV::dbfork**

When this variable is set to **true**, TotalView catches the **fork()**, **vfork()**, and **execve()** system calls if your executable is linked with the **dbfork** library.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::display_assembler_symbolically**

When this variable is set to **true**, TotalView displays assembler locations as **label+offset**. When it is set to **false**, these locations are displayed as hexadecimal addresses.

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::dll_ignore_prefix**

Defines a list of library files for which you are not asked to stop the process when it is loaded. This list contains a colon-separated list of prefixes. Also, TotalView will not ask if you would like to stop a process if:

- You also set the **TV::ask_on_dlopen** variable to **true**.
- The suffix of the library being loaded does *not* match a suffix contained in the **TV::dll_stop_suffix** variable.
- One or more of the prefixes in this list match the name of the library being loaded.

*Permitted Values*: A list of path names, each item of which is separated from another by a colon
*Default*: **/lib/:/usr/lib/:/usr/lpp/:/usr/ccs/lib/:/usr/dt/lib/:/tmp/**

**TV::dll_read_all_symbols**

TotalView will always read loader and debugging symbols of libraries named within this variable.

This variable is set to a colon-separated list of library names. A name can contain the * (asterisk) and ? (question mark) wildcard characters, which have their usual meaning:

- *****: zero or more characters.
- **?**: a single character.

As this is TotalView's default behavior, only include library names here that would be excluded because they are selected by a wildcard match within the **TV:dll_read_loader_symbols_only** and **TV::dll_read_no_symbols** variables.

*Permitted Values*: One or more library names separated by colons
*Default*: None

**TV::dll_read_loader_symbols_only**

When TotalView loads libraries named in this variable, it only reads loader symbols. Because TotalView checks and processes the names in **TV::dll_read_all_symbols** list before it processes this list, it will ignore names that are in that list and in this one.

This variable is set to a colon-separated list of strings. Any string can contain the * (asterisk) and ? (question mark) wildcard characters, which have their usual meaning:

- *: zero or more characters.
- ?: a single character.

If you are not interested in debugging most of your shared libraries, set this variable to * and then put the names of any libraries you wish to debug on the TV::dll_read_all_symbols list.

*Permitted Values*: One or more library names separated by colons
*Default*: None

### TV::dll_read_no_symbols

When TotalView loads libraries named in this variable, it will not read in either loader or debugging symbols. Because TotalView checks and processes the names in the TV::dll_read_loader_symbols_only lists before it processes this list, it will ignore names that are in those lists and in this one.

This variable is set to a colon-separated list of strings. Any string can contain the * (asterisk) and ? (question mark) wildcard characters having their usual meaning:

- *, which means zero or more characters
- ?, which means a single character.

Because information about subroutines, variables, and file names will not be known for these libraries, stack backtraces may be truncated. However, if your program uses large shared libraries and it's time consuming to read even their loader symbols, you may want to put those libraries on this list.

*Permitted Values*: One or more library names separated by colons
*Default*: None

### TV::dll_stop_suffix

Contains a colon-separated list of suffixes that tell TotalView that it should stop the current process when it loads a library file having this suffix.

TotalVIew will ask you if you would like to stop the process:

- If TV::ask_on_dlopen variable is set to true
- If one or more of the suffixes in this list match the name of the library being loaded.

*Permitted Values*: A Tcl list of suffixes
*Default*: None

### TV::dpvm

When this is set to true, TotalView enables support for debugging HP Tru64 UNIX Parallel Virtual Machine applications. This value can only be set in a startup script. You can override this variable's value by using the following command-line options switches:

–dpvm sets this variable to true

–no_dpvm sets this variable to false

*Permitted Values*: true or false
*Default*: false

### TV::dump_core

When this is set to **true**, TotalView will create a core file when an internal TotalView error occurs. This is only used when debugging TotalView problems. You can override this variable's value by using the following command-line options:

**–dump_core** sets this variable to **true**

**–no_dumpcore** sets this variable to **false**

*Permitted Values*: **true** or **false**
*Default*: **false**

### TV::dynamic

When this is set to **true**, TotalView loads symbols from shared libraries. This variable is available on all platforms supported by Etnus. (This may not be true for platforms ported by others. For example, this feature is not available for Hitachi computers.) Setting this value to **false** can cause the **dbfork** library to fail because TotalView might not find the **fork(), vfork()**, and **execve()** system calls.

*Permitted Values*: **true** or **false**
*Default*: **true**

### TV::editor_launch_string

Defines the editor launch string command. The launch string substitution characters you can use are:

**%E**: The editor

**%F**: The display font

**%N**: The line number

**%S**: The source file

*Permitted Values*: Any string value—as this is a Tcl variable, you'll need to enclose the string within **{}** (braces) if the string contains spaces
*Default*: **{xterm –e %E +%N %S}**

### TV::force_default_cplus_demangler

When this is set to **true**, TotalView uses the demangler set in the **TV::current_cplus_demangler** variable. You would set this variable when TotalView uses the wrong demangler. TotalView can use the wrong demangler if you are using an unsupported compiler, and unsupported language preprocessor, or if your vendor has made changes to your compiler.

*Permitted Values*: **true** or **false**
*Default*: **false**

### TV::force_default_f9x_demangler

When this is set to **true**, TotalView uses the demangler set in the **TV::current_fortran_demangler** variable. You would set this variable when TotalView uses the wrong demangler. TotalView can use the wrong demangler if you are using an unsupported compiler, and unsupported language preprocessor, or if your vendor has made changes to your compiler.

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::global_typenames**

When this is set to **true**, TotalView assumes that type names are globally unique within a program and that all type definitions with the same name are identical. This must be true for standard-conforming C++ compilers.

If you set this option to **true**, TotalView attempts to replace an opaque type (**struct foo *p;**) declared in one module with an identically named defined type (**struct foo { … };**) in a different module.

If TotalView has read the symbols for the module containing the non-opaque type definition, it will automatically display the variable by using the non-opaque type definition when displaying variables declared with the opaque type.

If you set this variable to **false**, TotalView does *not* assume that type names are globally unique within a program. Only use this variable if your code has different definitions of the same named type since TotalView can pick the wrong definition when it substitutes for an opaque type in this case.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::ignore_control_c**

When this is set to **true**, TotalView ignores Ctrl+C characters. This prevents you from inadvertently terminating the TotalView process. You would set this option to **false** when your program catches the Ctrl+C (**SIGINT**) signal.

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::image_load_callbacks**

Contains a Tcl list of procedures names. TotalView invokes the procedures named in this list whenever it loads a new program. This could occur when:

- A user invokes a command such as **dload**.
- TotalView resolves dynamic library dependencies.
- User code uses **dlopen()** to load a new image.

TotalView invokes the functions in order, beginning at the first function in this list.

*Permitted Values*: A Tcl list of procedure names
*Default*: none

**TV::in_setup**

Contains a **true** value if called while TotalView is being initialized. Your procedures would read the value of this variable so that code can be conditionally executed based on whether TotalView is being initialized. In most cases, this is used for code that should only be invoked while TotalView is being initialized. This is a read-only variable.

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::kcc_classes**

When this is set to **true**, TotalView converts structure definitions created by the KCC compiler into classes that show base classes and virtual base classes in the same way as other C++ compilers. When this is set to **false**, TotalView does not perform this conversion. In this case, TotalView displays virtual bases as pointers rather than as the data.

TotalView converts structure definitions by matching the names given to structure members. This means that TotalView may not convert definitions correctly if your structure component names look like KCC processed classes. However, TotalView never converts these definitions unless it believes that the code was compiled with KCC. (It does this when it sees one of the tag strings that KCC outputs, or when you use the KCC name demangler.) Because all of the recognized structure component names start with "_ _" and the C standard forbids this use, your code should not contain names with this prefix.

Under some circumstances, TotalView may not be able to convert the original type names because type definition are not available. For example, it may not be able to convert "**struct __SO_foo**" to "**struct foo**". In this case, TotalView shows the "**__SO_foo**" type. This is only a cosmetic problem. (The "**__SO__**" prefix denotes a type definition for the nonvirtual components of a class with virtual bases).

Since KCC output does not contain information on the accessibility of base classes (**private**, **protected**, or **public**), TotalView cannot provide this information.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::kernel_launch_string**

This is not currently used.

**TV::library_cache_directory**

Specifies the directory into which TotalView writes library cache data.

*Permitted Values*: A string indicating a path
*Default*: **$USERNAME/.totalview/lib_cache**

**TV::local_interface**

Sets the interface name that the server uses when it makes a callback. For example, on an IBM PS2 machine, you would set this to css0. However, you can use any legal **inet** interface name. (You can obtain a list of the interfaces if you use the **netstat -i** command.)

*Permitted Values*: A string
*Default*: **{}**

**TV::local_server**

(Sun only) By default, TotalView finds the local server in the same place as the remote server. On Sun platforms, TotalView can launch a 32- and 64-bit version. This variable tells TotalView which local server it should launch.

*Permitted Values*: A file or path name to the local server
*Default*: **tvdsvr**

**TV::local_server_launch_string**

(Sun only) If TotalView will not be using the server contained in the same working directory as the TotalView executable, the contents of this string indicate the shell command that TotalView uses to launch this alternate server. For information on this launch string, see "*Replacement Characters*" on page 214.

*Permitted Values*: A string enclosed with **{}** (braces) if it has embedded spaces
*Default*: **{%M –working_directory %D –local %U –set_pw %P –verbosity %V}**

**TV::message_queue**

When this is set to **true**, TotalView displays MPI message queues when you are debugging an MPI program. When the variable is set to **false**, these queues are not displayed. You would disable these queues if something is overwriting the message queues, thereby confusing TotalView.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::nptl_threads**

When set to **auto**, TotalView determines which threads package your program is using. Setting this variable to **true** tells TotalView that it is using NPTL threads. **false** means that the program isn't using this package.

*Permitted Values*: **true**, **false**, or **auto**
*Default*: **auto**

**TV::open_cli_window_callback**

The CLI executes the string that is this variable's value after you open the CLI by selecting the **Tools** > **Command Line** command. It is ignored when you open the CLI from the command line. It is most commonly used to set the terminal characteristics of the (pseudo) tty that the CLI is using, since these are inherited from the tty on which TotalView was started. Therefore, if you start TotalView from a shell running inside an Emacs buffer, the CLI uses the raw terminal modes that Emacs is using. You can change your terminal mode by adding the following command to your **.tvdrc** file:

```
dset TV::open_cli_window_callback "stty sane"
```

*Permitted Values*: A string representing a Tcl or CLI command
*Default*: Null

**TV::parallel**

When this is set to **true**, you are enabling TotalView support for parallel program runtime libraries such as MPI, PE, and UPC. You might set this to **false** if you need to debug a parallel program as if it were a single-process program.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::parallel_attach**

Tells TotalView if it should automatically attach to processes. Your choices are as follows:

- **yes**: Attach to all started processes.
- **no**: Do not attach to any started processes.
- **ask**: Display a dialog box listing the processes to which TotalView can attach, and let the user decide to which ones TotalView should attach.

*Permitted Values*: **yes**, **no**, or **ask**
*Default*: **yes**

**TV::parallel_stop**

Tells TotalView if it should automatically run processes when your program launches them. Your choices are as follows:

- **yes**: Stop the processes before they begin executing.
- **no**: Do not interfere with the processes; that is, let them run.
- **ask**: Display a question box asking if it should stop before executing.

*Permitted Values*: **yes**, **no**, or **ask**
*Default*: **ask**

**TV::platform**

Indicates the platform upon which you are running TotalView. This is a read-only variable.

*Permitted Values*: One of the following values: **alpha**, **hpux11-hppa**, **hpux11-ia64**, **irix6-mips**, **linux-ia64**, **linux-x86**, **linux-x86-64**, **linux-alpha**, **rs6000**, and **sun5**
*Default*: Platform-specific

**TV::process_load_callbacks**

Names the procedures that TotalView runs immediately after it loads a program and just before it runs it. TotalView executes these procedures after it invokes the procedures in the **TV::image_load_callbacks** list.

The procedures in this list are only called once even though your executable may use many programs and libraries.

*Permitted Values*: A list of procedures
*Default*: **TV::source_process_startup**. The default procedure looks for a file with the same name as the newly loaded process's executable image that has a **.tvd** suffix appended to it. If it exists, TotalView executes the commands contained within it. This function is passed an argument that is the ID for the newly created process.

**TV::pvm**

When this is set to **true**, TotalView lets you debug the ORNL (Oak Ridge National Laboratory) implementation of Parallel Virtual Machine (PVM) applications. This variable can only be set in a start up script. However, you can override this value by using the following command-line options:

**–pvm** sets this variable to **true**

**–no_pvm** sets this variable to **false**

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::save_global_dialog_defaults**

Obsolete.

**TV::save_search_path**

Obsolete.

**TV::save_window_pipe_or_filename**

Names the file to which TotalView writes or pipes the contents of the current window or pane when you select the **File** > **Save Pane** command.

*Permitted Values*: A string naming a file or pipe
*Default*: None, until something is saved. Afterward, the saved string is the default.

**TV::search_case_sensitive**

When this is set to **true**, text searches only succeed if a string exists whose case exactly matches what you enter in the **Edit** > **Find** Dialog Box. For example, searching for **Foo** won't find **foo** if this variable is set to **true**. It will be found if this variable is set to **false**.

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::server_launch_enabled**

When this is set to **true**, TotalView uses its single-process server launch procedure when launching remote **tvdsvr** processes. When the variable is set to **false**, **tvdsvr** is not automatically launched.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::server_launch_string**

Names the command string that TotalView uses to automatically launch the TotalView Debugger Server (**tvdsvr**) when you start to debug a remote process. This command string is executed by **/bin/sh**. By default, TotalView uses the **rsh** command to start the server, but you can use any other command that can invoke **tvdsvr** on a remote host. If no command is available for invoking a remote process, you can't automatically launch the server; therefore, you should set this variable to **/bin/false**. If you cannot automatically launch a server, you should also set the **TV::server_launch_enabled** variable to **false**. For information on this launch string, see "*Replacement Characters*" on page 214.

*Permitted Values*: A string
*Default*: **{%C %R –n "%B/tvdsvr –working_directory %D –callback %L –set_pw %P –verbosity %V %F"}**

**TV::server_launch_timeout**

Specifies the number of seconds that TotalView waits to hear back from the TotalView Debugger Server (**tvdsvr**) that it launches.

*Permitted Values*: An integer from 1 to 3600 (1 hour)
*Default*: 30

**TV::share_action_point**

Indicates the scope in which TotalView places newly created action points. In the CLI, this is the **dbarrier**, **dbreak**, and **dwatch** commands. If this Boolean value is **true**, newly created action point are shared across the group. If it is **false**, a newly created action point is only active in the process in which it is set.

As an alternative to setting this variable, you can select the **Plant in share group** check box in the **Action Points** Page in the **File** > **Preferences** Dialog Box. You can override this value in the GUI by using selecting the **Plant in share group** checkbox in the **Action Point** > **Properties** Dialog Box.

*Permitted Values*: **true** or **false**
*Default*: **true**

## TV::signal_handling_mode

The list that you assign to this variable modifies the way in which TotalView handles signals. This list consists of a list of *signal_action* descriptions, separated by spaces:

```
signal_action[signal_action] ...
```

A *signal_action* description consists of an action, an equal sign (=), and a list of signals:

```
action=signal_list
```

An *action* can be one of the following: **Error**, **Stop**, **Resend**, or **Discard**.

A *signal_list* is a list of one or more signal specifiers, separated by commas:

```
signal_specifier[,signal_specifier] ...
```

A *signal_specifier* can be a signal name (such as **SIGSEGV**), a signal number (such as **11**), or a star (*****), which specifies all signals. We recommend using the signal name rather than the number because number assignments vary across UNIX versions.

The following rules apply when you are specifying an *action_list*:

- If you specify an action for a signal in an *action_list*, TotalView changes the default action for that signal.
- If you do not specify a signal in the *action_list*, TotalView does not change its default action for the signal.
- If you specify a signal that does not exist for the platform, TotalView ignores it.
- If you specify an action for a signal twice, TotalView uses the last action specified. In other words, TotalView applies the actions from left to right.

If you need to revert the settings for signal handling to TotalView's built-in defaults, use the **Defaults** button in the **File** > **Signals** Dialog Box.

For example, to set the default action for the **SIGTERM** signal to *Resend*, you specify the following action list:

```
{Resend=SIGTERM}
```

As another example, to set the action for **SIGSEGV** and **SIGBUS** to *Error*, the action for **SIGHUP** and **SIGTERM** to *Resend*, and all remaining signals to *Stop*, you specify the following action list:

```
{Stop=* Error=SIGSEGV,SIGBUS Resend=SIGHUP,SIGTERM}
```

This action list shows how TotalView applies the actions from left to right.

1. Sets the action for all signals to *Stop*.
2. Changes the action for **SIGSEGV** and **SIGBUS** from *Stop* to *Error*.
3. Changes the action for **SIGHUP** and **SIGTERM** from *Stop* to *Resend*.

*Permitted Values*: A list of signals, as was just described
*Default*: This differs from platform to platform; type **dset TV::signal_handling_mode** to see what a platform's default values are

**TV::source_pane_tab_width**

Sets the width of the tab character that is displayed in the Process Window's Source Pane. You may want to set this value to the same value as you use in your text editor.

*Permitted Values*: An integer
*Default*: 8

**TV::spell_correction**

When you use the **View > Lookup Function** or **View > Lookup Variable** commands in the Process Window or edit a type string in a Variable Window, the debugger checks the spelling of your entries. By default (**verbose**), the debugger displays a dialog box before it corrects spelling. You can set this resource to **brief** to run the spelling corrector silently. (TotalView makes the spelling correction without displaying it in a dialog box first.) You can also set this resource to **none** to disable the spelling corrector.

*Permitted Values*: **verbose**, **brief**, or **none**
*Default*: **verbose**

**TV::stop_all**

Indicates a default property for newly created action points. This property tells TotalView what else it should stop when it encounters this action point. The values you can set are as follows:

| | |
|---|---|
| **group** | Stops the entire control group when the action point is hit. |
| **process** | Stops the entire process when the action point is hit. |
| **thread** | Only stops the thread that hit the action point. Note that **none** is a synonym for **thread**. |

*Permitted Values*: **group**, **process**, or **thread**
*Default*: **group**

**TV::stop_relatives_on_proc_error**

When this is set to **true**, TotalView stops the control group when an error signal is raised. This is the variable used by the **Stop control group on error signal** option in the **Options** Page of the **File > Preferences** Dialog Box.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::suffixes**

Use a space separated list of items to identify the contents of a file. Each item on this list has the form: **suffix:lang[:include]**. You can set more than suffix for an item. If you want to remove an item from the default list, set its value to **unknown**.

*Permitted Values*: A list identifying how suffixes are used
*Default*: **{:c:include s:asm S:asm c:c h:c:include lex:c:include y:c:include bmap:c:include f:f77 F:f77 f90:f9x F90:f9x hpf:hpf HPF:hpf cxx:c++ cpp:c++ cc:c++ c++:c++ C:c++ C++:c++ hxx:c++:include hpp:c++:include hh:c++:include h++:c++:include HXX:c++:include HPP:c++:include HH:c++:include H:c++:include ih:c++:include th:c++}**

**TV::ttf**

When set to **true**, TotalView uses registered type transformations to change the appearance of data types that have been registered using the TV::type_transformation routine.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::ttf_max_length**

When transforming STL structures, TotalView must chase through pointers to obtain values. This number indicates how many of these pointers it should follow.

*Permitted Values*: an integer number
*Default*: 500

**TV::user_threads**

When this is set to **true**, it enables TotalView support for handling user-level (M:N) thread packages on systems that support two-level (kernel and user) thread scheduling.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::version**

Indicates the current TotalView version. This is a read-only variable.

*Permitted Values*: A string
*Default*: Varies from release to release

**TV::visualizer_launch_enabled**

When this is set to **true**, TotalView automatically launches the Visualizer when you first visualize something. If you set this variable to **false**, TotalView disables visualization. This is most often used to stop evaluation points containing a **$visualize** directive from invoking the Visualizer.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::visualizer_launch_string**

Specifies the command string that TotalView uses when it launches a visualizer. Because the text is actually used as a shell command, you can use a shell redirection command to write visualization datasets to a file (for example, "**cat** > *your_file*").

*Permitted Values*: A string
*Default*: **visualize**

**TV::visualizer_max_rank**

Specifies the default value used in the **Maximum permissible rank** field in the **Launch Strings** Page of the **File** > **Preferences** Dialog Box. This field sets the maximum rank of the array that TotalView will export to a visualizer. The TotalView Visualizer cannot visualize arrays of rank greater than 2. If you are using another visualizer or just dumping binary data, you can set this value to a larger number.

*Permitted Values*: An integer
*Default*: 2

**TV::warn_step_throw**

If this is set to **true** and your program throws an exception during a TotalView single-step operation, TotalView asks if you wish to stop the step operation. The process will be left stopped at the C++ run-time library's

"throw" routine. If this is set to **false**, TotalView will not catch C++ exception throws during single-step operations. Setting it to **false** may mean that TotalView will lose control of the process, and you may not be able to control the program.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::wrap_on_search**

When this is set to **true**, TotalView will continue searching from either the beginning (if **Down** is also selected in the **Edit** > **Find** Dialog Box) or the end (if **Up** is also selected) if it doesn't find what you're looking for. For example, you search for **foo** and select the **Down** button. If TotalView doesn't find it in the text between the current position and the end of the file, TotalView will continue searching from the beginning of the file if you set this option.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::xterm_name**

The name of the program that TotalView should use when spawning the CLI. In most cases, you will set this using the **–xterm_name** command-line option.

*Permitted Values*: a string
*Default*: **xterm**

## TV::GUI:: Namespace

*The variables in this section only have meaning (and in some cases, a value) when your are displaying TotalView's* GUI.

**TV::GUI::chase_mouse**

When this variable is set to **true**, TotalView displays dialog boxes at the location of the mouse cursor. If this is set to **false**, TotalView displays them centered in the upper third of the screen.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::GUI::display_font_dpi**

Indicates the video monitor DPI (dots per inch) at which fonts are displayed.

*Permitted Values*: An integer
*Default*: 75

**TV::GUI::enabled**

When this is set to **true**, you invoked the CLI from the GUI or a startup script. Otherwise, this read-only value is **false**.

*Permitted Values*: **true** or **false**
*Default*: **true** if you are running the GUI even though you are seeing this in a CLI window; **false** if you are only running the CLI

**TV::GUI::fixed_font**

Indicates the specific font TotalView uses when displaying program information such as source code in the Process Window or data in the Variable Window. This variable contains the value set when you select a **Code and Data Font** entry in the **Fonts** Page of the **File > Preferences** Dialog Box.

This is a read-only variable.

*Permitted Values*: A string naming a fixed font residing on your system
*Default*: While this is platform specific, here is a representative value: **-adobe-courier-medium-r-normal--12-120-75-75-m-70-iso8859-1**

**TV::GUI::fixed_font_family**

Indicates the specific font TotalView uses when displaying program information such as source code in the Process Window or data in the Variable Window. This variable contains the value set when you select a **Code and Data Font** entry of the **Fonts** Page of the **File > Preferences** Dialog Box.

*Permitted Values*: A string representing an installed font family
*Default*: **fixed**

**TV::GUI::fixed_font_size**

Indicates the point size at which TotalView displays fixed font text. This is only useful if you have set a fixed font family because if you set a fixed font, the value entered contains the point size.

Font sizes are indicated using printer points.

*Permitted Values*: An integer
*Default*: 12

**TV::GUI::font**

Indicates the specific font used when TotalView writes information as the text in dialog boxes and in menu bars. This variable contains the information set when you select a **Select by full name** entry in the **Fonts** Page of the **File > Preferences** Dialog Box.

*Permitted Values*: A string naming a fixed font residing on your system. While this is platform specific, here is a representative value: **-adobe-helvetica-medium-r-normal--12-120-75-75-p-67-iso8859-1**
*Default*: **helvetica**

**TV::GUI::force_window_positions**

Setting this variable to **true** tells TotalView that it should use the version 4 window layout algorithm. This algorithm tells the window manager where to set the window. It also cascades windows from a base location for each window type. If this is not set, which is the default, newer window managers such as **kwm** or **Enlightment** can use their smart placement modes.

Dialog boxes still chase the pointer as needed and are unaffected by this setting.

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::GUI::geometry_call_tree**

Specifies the position at which TotalView displays the **Tools** > **Call Tree** Window. This position is set using a list containing four values: the window's **x** and **y** coordinates. These are followed by two more values specifying the window's width and height.

If you set any of these values to 0 (zero), TotalView uses its default value. This means, however, you cannot tell TotalView to place a window at **x**, **y** coordinates of 0, 0. Instead, you'll need to place the window at 1, 1.

If you specify negative **x** and **y** coordinates, TotalView aligns the window to the opposite edge of the screen.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height
*Default*: **{0 0 0 0}**

**TV::GUI::geometry_cli**

Specifies the position at which TotalView displays the **Tools** > **CLI** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height
*Default*: **{0 0 0 0}**

**TV::GUI::geometry_globals**

Specifies the position at which TotalView displays the **Tools** > **Program Browser** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height
*Default*: **{0 0 0 0}**

**TV::GUI::geometry_expressions**

Specifies the position at which TotalView displays the **Tools** > **Expression List** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height
*Default*: **{0 0 0 0}**

**TV::GUI::geometry_help**

Specifies the position at which TotalView displays the **Help** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height
*Default*: **{0 0 0 0}**

**TV::GUI::geometry_memory_stats**

Specifies the position at which TotalView displays the **Tools** > **Memory Statistics** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinate's and the window's width and height
*Default*: **{0 0 0 0}**

**TV::GUI::geometry_message_queue**

Specifies the position at which TotalView displays the **Tools** > **Message Queue** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height

*Default*: **{0 0 0 0}**

**TV::GUI::geometry_message_queue_graph**

Specifies the position at which TotalView displays the **Tools** > **Message Queue Graph** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height

*Default*: **{0 0 0 0}**

**TV::GUI::geometry_modules**

Specifies the position at which TotalView displays the **Tools** > **Fortran Modules** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height.

*Default*: **{0 0 0 0}**

**TV::GUI::geometry_process**

Specifies the position at which TotalView displays the Process Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height

*Default*: **{0 0 0 0}**

**TV::GUI::geometry_ptset**

Specifies the position at which TotalView displays the **Tools** > **P/T Set** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height

*Default*: **{0 0 0 0}**

**TV::GUI::geometry_pvm**

Specifies the position at which TotalView displays the **Tools** > **PVM** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height

*Default*: **{0 0 0 0}**

**TV::GUI::geometry_root**

Specifies the position at which TotalView displays the Root Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height

*Default*: **{0 0 0 0}**

**TV::GUI::geometry_thread_objects**

Specifies the position at which TotalView displays the **Tools** > **Thread Objects** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height
*Default*: **{0 0 0 0}**

**TV::GUI::geometry_variable**

Specifies the position at which TotalView displays the Variable Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height
*Default*: **{0 0 0 0}**

**TV::GUI::geometry_variable_stats**

Specifies the position at which TotalView displays the **Tools** > **Statistics** Window.

See **TV::GUI::geometry_call_tree** for information on setting this list.

*Permitted Values*: A list containing four integers indicating the window's **x** and **y** coordinates and the window's width and height
*Default*: **{0 0 0 0}**

**TV::GUI::keep_search_dialog**

When this is set to **true**, TotalView doesn't remove the **Edit** > **Find** Dialog Box after you select that dialog box's **Find** button. If you select this option, you will need to select the **Close** button to dismiss the **Edit** > **Find** box.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::GUI::pop_at_breakpoint**

When this is set to **true**, TotalView sets the **Open (or raise) process window at breakpoint** check box to be selected by default. If this variable is set to **false**, it sets that check box to be deselected by default.

*Permitted Values*: **true** or **false**
*Default*: **false**

**TV::GUI::pop_on_error**

When this is set to **true**, TotalView sets the **Open process window on error signal** check box in the **File** > **Preferences**'s **Option** Page to be selected by default. If you set this to **false**, TotalView sets that check box to be deselected by default.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::GUI::single_click_dive_enabled**

When set, you can perform dive operations using the middle mouse button. Diving using a left-double-click still works. If you are editing a field, clicking the middle mouse performs a paste operation.

*Permitted Values*: **true** or **false**
*Default*: **true**

**TV::GUI::ui_font**

Indicates the specific font used when TotalView writes information as the text in dialog boxes and in menu bars. This variable contains the information set when you select a **Select by full name** entry in the **Fonts** Page of the **File** > **Preferences** Dialog Box.

*Permitted Values*: While this is platform specific, here is a representative value:
**-adobe-helvetica-medium-r-normal--12-120-75-75-p-67-iso8859-1**
*Default*: **helvetica**

**TV::GUI::ui_font_family**

Indicates the family of fonts that TotalView uses when displaying such information as the text in dialog boxes and menu bars. This variable contains the information set when you select a **Family** in the **Fonts** Page of the **File** > **Preferences** Dialog Box.

*Permitted Values*: A string
*Default*: **helvetica**

**TV::GUI::ui_font_size**

Indicates the point size at which TotalView writes the font used for displaying such information as the text in dialog boxes and menu bars. This variable contains the information set when you select a User Interface **Size** in the **Fonts** Page of the **File** > **Preferences** Dialog Box.

*Permitted Values*: An integer
*Default*: **12**

**TV::GUI::using_color**

Not implemented.

**TV::GUI::using_text_color**

Not implemented.

**TV::GUI::using_title_color**

Not implemented.

**TV::GUI::version**

This number indicates which version of the TotalView GUI is being displayed. This is a read-only variable.

*Permitted Values*: A number

# Creating Type Transformations

5

The Type Transformation Facility (TTF) lets you define the way TotalView displays aggregate data. *Aggregate data* is simply a collection of data elements from within one class or structure. These elements can also be other aggregated elements. In most cases, you will create transformations that model data that your program stores in an array- or list-like way. You can also transform arrays of structures.

This chapter describes the TTF. It presents information how you create your own. Creating transformations can be quite complicated. This chapter looks at transformations for which TotalView can automatically create an addressing expression. If TotalView can't create this expression, you will need to read the *Creating Type Transformations* Guide, which is located on our web site at **http://www.etnus.com/Support/docs/**.

Topics in this chapter are:


- "*Why Type Transformations*" on page 191
- "*Creating Structure and Class Transformations*" on page 192


## Why Type Transformations

Modern programming languages allow you to use abstractions such as structures, class, and STL data types such as lists, maps, and vectors to model the data that your program uses. For example, the STL (Standard Template Library) allows you to create vectors of the data contained within a class. These abstractions simplify the way in which you think of and manipulate program's data. These abstractions can also complicate the way in which you debug your program because it may be nearly impossible

or very inconvenient to examine your program's data. For example, the following figure shows a vector transformation.

*Figure 1: A Vector Transformation*

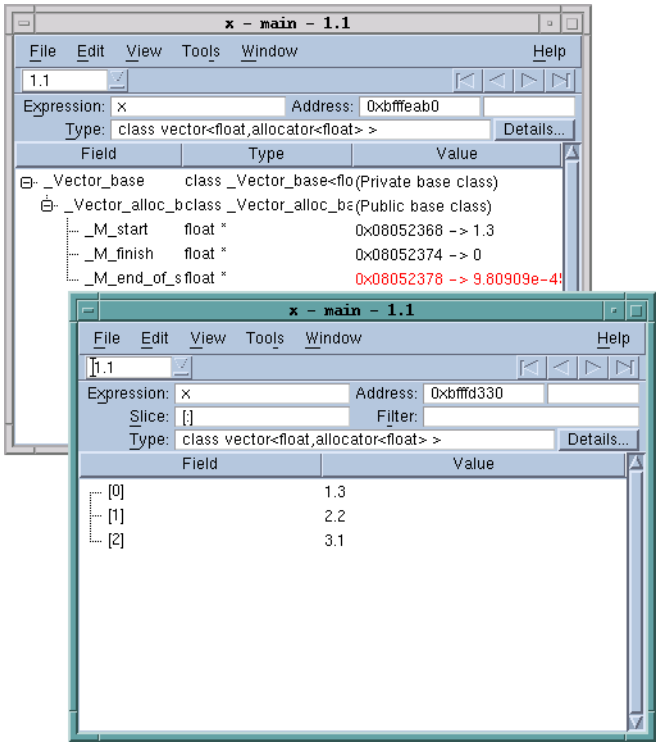


The upper left window shows untransformed information. In this example, TotalView displays the complete structure of this GNU C++ STL structure. This means that you are seeing the data exactly as your compiler created it.

The logical model that is the reason for using an STL vector is buried within this information. Neither TotalView nor your compiler has this information. This is where type transformations come in. They give TotalView knowledge of how the data is structured and how it can access data elements. The bottom Variable Window shows how TotalView reorganizes this information.

*Transforming* STL *strings, vectors, lists, and maps is the TotalView default. If you do not want TotalView to transform your information, select the Options Tab within the* **File > Preferences** *Dialog Box and then remove the check mark from* **View simplified STL containers (and user-defined transformations)**.

## Creating Structure and Class Transformations

The procedure for transforming a structure or a class requires that create a mapping between the elements of the structure or class and the way in which you want this information to appear.

This section contains the following topics:


- *"Transforming Structures"* on page 193
- *"build_struct_transform Function"* on page 194
- *"Type Transformation Expressions"* on page 195


## Transforming Structures

The following small program contains a structure and the statements necessary to initialize it:

```
#include <stdio.h>

int main () {
   struct stuff {
      int month;
      int day;
      int year;
      char * pName;
      char * pStreet;
      char CityState[30];
   };

   struct stuff info;
   char my_name[]   = "John Smith";
   char my_street[] = "24 Prime Parkway, Suite 106";
   char my_CityState[] = "Natick, MA 01760";

   info.month = 6;
   info.day   = 20;
   info.year  = 2004;
   info.pName = my_name;
   info.pStreet  = my_street;
   strcpy(info.CityState, my_CityState);

   printf("The year is %d\n", info.year);
}
```

Suppose that you do not want to see the **month** and **day** components. You can do this by creating a transformation that names just the elements you want to include:

```
::TV::TTF::RTF::build_struct_transform {
   name   {^struct stuff$}
   members {
         { year     { year      } }
         { pName    { * pName   } }
         { pStreet  { * pStreet } }
   }
}
```

You can apply this transformation to your data in the following ways:

- After opening the program, use the **Tools** > **Command Line** command to open a CLI Window. Next, type this function call.
- If you write the function call into a file, use the Tcl **source** command. If the name of the file is **stuff.tvd**, enter the following command into a CLI Window:

  **source stuff.tvd**

- You can place the transformation source file into the same directory directory as the executable, giving it the same root name as the executable. If the executable file has the name **stuff**, TotalView will automatically execute all commands within a file named **stuff.tvd** when it loads your executable.

After TotalView processes your transformation, it displays the following Variable Window when you dive on the **info** structure:

*Figure 2: Transforming a Structure*

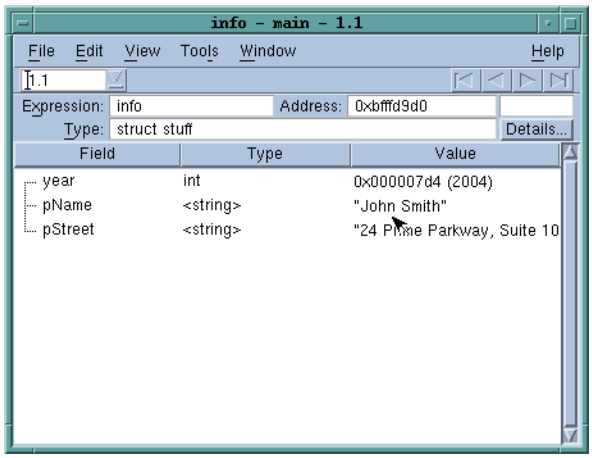


## build_struct_-transform Function

The **build_struct_transform** routine used in the example in the previous section is a Tcl helper function that builds the callbacks and addressing expressions that TotalView needs when it transforms data. It has two required arguments: **name** and **members**.

### name Argument

The **name** argument contains a regular expression that identifies the structure or class. In this example, **struct** is part of the identifier's name. It does not mean that you are creating a structure. In contrast, if **stuff** is class, you would type:

```
name  {^class stuff$}
```

If you use a wildcard such as asterisk ()* or question mark (?), TotalView can match more than one thing. In some cases, this is what you want. If it isn't, you need to be more precise in your wildcard.

### members Argument

The **members** argument names the elements that TotalView will include in the information it will display. This argument contains one or more lists. The example in the previous section contained three lists: **year**, **pName**, and **pStreet**. Here again is the **pName** list:

```
{ pName   { * pName   } }
```

The first element in the list is the display name. In most cases, this is the name that exists in the structure or class. However, you can use another name. For example, since the transformation dereferences the pointer, you might want to change its name to **Name**:

```
{ Name    { * pName   } }
```

The sublist within the list defines a type transformation expression. These expressions are discussed in the next section.

## Type Transformation Expressions

The list that defines a member has a name component and sublist within the list. This sublist defines a *type transformation expression*. This expression tells TotalView what it needs to know to locate the member. The example in the previous section used two of the six kinds of expressions. The following list describes each:

**{member}** No transformation occurs. The structure or class member that TotalView displays is the same as it displays if you hadn't used a transformation. This is most often used for simple data types such as ints and floats.

**{* expr}** Dereferences a pointer. If the data element is a pointer to an element, this expression tells TotalView to dereference the pointer and display the dereferenced information.

**{expr . expr}** Names a subelement of a structure. This is used in the same way as the dot operator that exists in C and C++. You must type a space before and after the dot operator.

**{expr -> expr }** Names a subelement in a structure accessed using a pointer. This is used in the same way as the -> operator that exists in C and C++. You must type a space before and after the -> operator.

**{datatype cast expr}**
Casts a data type. For example:

**{double cast national_debt}**

**{N upcast expr}** Converts the current class type into one of its base classes. For example:

**{base_class upcast expr }**

You can nest expressions within expressions. For example, here is the list for adding an int member that is defined as **int **pfoo**:

**{foo { * {* pfoo}}**

### Example

The example in this section changes the structure elements of the example in the previous section so that they are now class members. In addition, this example contains a class that is derived from a second class:

```
#include <stdio.h>
#include <string.h>

class xbase
{
   public:
      char * pName;
      char * pStreet;
      char CityState[30];
};
```

```
class x1 : public xbase
{
   public:
      int month;
      int day;
      int year;
      void *v;
      void *q;
};

class x2
{
   public:
      int q1;
      int q2;
};

int main () {
   class x1 info;
   char my_name[]   = “John Smith”;
   char my_street[] = “24 Prime Parkway, Suite 106”;
   char my_CityState[] = “Natick, MA 01760”;

   info.month = 6;
   info.day   = 20;
   info.year  = 2004;
   info.pName = my_name;
   info.pStreet  = my_street;
   info.v  = (void *) my_name;
   strcpy(info.CityState, my_CityState);

   class x2 x;
   x.q1 = 100;
   x.q2 = 200;
   info.q = (void *) &x;

   printf(“The year is %d\n”, info.year);
}
```

The following figure shows the Variables Windows that TotalView displays for the **info** class and the **x** struct:

*Figure 3: Untransformed Data*

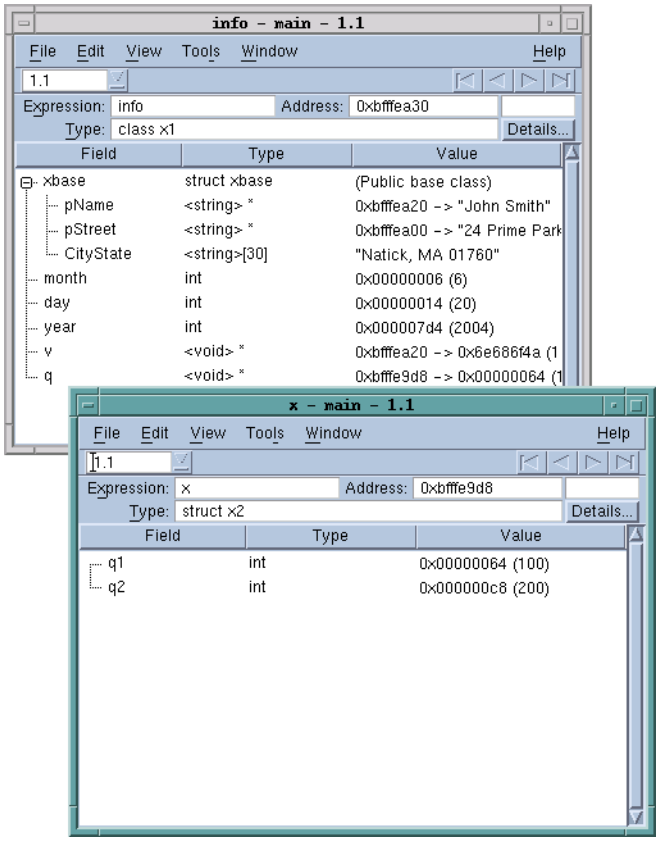


The following transformation remaps this information:

```
::TV::TTF::RTF::build_struct_transform {
   name   {^class x1$}
   members {
      { pmonth   { month } }
      { pName    { xbase upcast { * pName   } } }
      { pStreet  { xbase upcast { * pStreet } } }
      { pVoid1   { “<string> *”  cast v     } }
      { pVoid2   { * { “class x2 *”  cast q } } }
   }
}
```

After you remap the information, TotalView displays the **x1** class in the following way:

*Figure 4: Transformed Class*

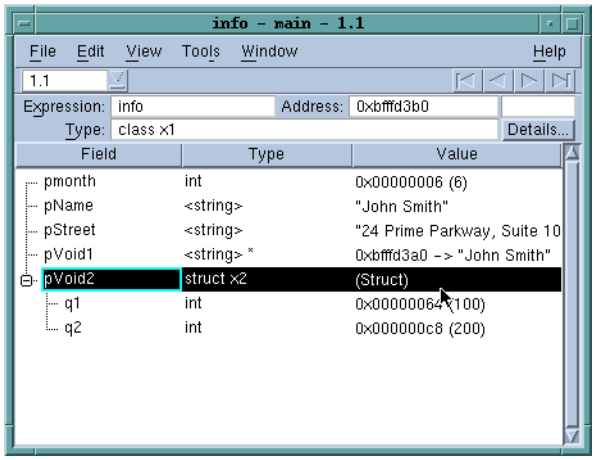


The members of this transformation are as follows:

- **pmonth**: The **month** member is added to the transformed structure without making any changes to the way TotalView displays its data. This member, however, changes the display name of the data element. That is, rhe name that TotalView uses to display a member within the remapped structure does not have to be the same as it is in the actual structure.
- **pName**: The **pName** member is added. The transformation contains two operations. The first dereferences the pointer. In addition, as **x1** is derived from **xbase**, you need to upcast the variable when you want to include it.

  Notice that one expression is nested within another.
- **pStreet**: The **pStreet** member is added. The operations that are performed are the same as for **pName**.
- **pVoid1**: The **v** member is added. Because the application's definition of the data is **void ***, casting tells TotalView how it should interpret the information. In this example, the data is being cast into a pointer to a string.
- **pVoid2**: The **q** member is added. The transformation contains two operations. The first casts **q** into a pointer to the **x2** class. The second dereferences the pointer.

## Using Type Transformations

When TotalView begins executing, it loads its built in transformations. To locate the directory in which these files are stored, use the following CLI command:

```
dset TOTALVIEW_TCLLIB_PATH
```

Type transformations are always loaded. By default, they are turned on. From the GUI, you can control whether transformations are turned on or off by going to the **Options** Page of the **File > Preferences** Dialog Box and changing the **View simplified STL containers (and user-defined**

**transformations)** item. For example, the following turns on type transformations:

```
dset TV::ttf true
```

# Part II: Running TotalView

This section of the TotalView Reference Guide contains information about command-line options you use when starting TotalView and the TotalView Debugger Server.

Chapter 6: TotalView Command Syntax

TotalView contains a great number of command-line options. Many of these options allow you to override TotalView's default behavior or a behavior that you've set in a preference or a startup file.

In previous releases, using options was the best way to set TotalView's behavior. Beginning with Release 6.0, you are better served by setting a preference or a CLI variable.

Chapter 7: TotalView Debugger Server (tvdsvr) Command Syntax

This chapter describes how you modify the behavior of the **tvdsvr**. These options are most often used if a problem occurs in launching the server or if you have some very specialized need. In most cases, you can ignore the information in this chapter.

# TotalView Command Syntax

6

This chapter describes the syntax of the **totalview** command. Topics in this chapter are:

- Syntax
- Options

## Syntax

*Format:* **totalview** [ *filename* [ *corefile* ]] [ *options* ]

*Arguments:*

*filename* — Specifies the path name of the executable being debugged. This can be an absolute or relative path name. The executable must be compiled with debugging symbols turned on, normally the **–g** compiler option. Any multiprocess programs that call **fork()**, **vfork()**, or **execve()** should be linked with the **dbfork** library.

*corefile* — Specifies the name of a core file. Use this argument in addition to *filename* when you want to examine a core file with TotalView.

*Description:* The TotalView debugger is a source-level debugger with a motif-based graphic user interface and features for debugging distributed programs, multiprocess programs, and multithreaded programs. TotalView is available on a number of different platforms.

If you specify mutually exclusive options on the same command line (for example, **–dynamic** and **–no_dynamic**), the last option listed is used.

## Options

**–a** *args* — Pass all subsequent arguments (specified by *args*) to the program specified by *filename*. This option must be the last one on the command line.

**–background** *color*

Sets the general background color to *color*.

*Default:* **light blue**

**–bg** *color* Same as **–background**.

**–compiler_vars** (Alpha, HP, and SGI only.) Shows variables created by the Fortran compiler, as well as those in the user's program.

Some Fortran compilers (HP f90/f77, HP f90, SGI 7.2 compilers) output debugging information that describes variables the compiler itself has invented for purposes such as passing the length of character*(*) variables. By default, TotalView suppresses the display of these compiler-generated variables.

However, you can specify the **–compiler_vars** option to display these variables. This is useful when you are looking for a corruption of a run-time descriptor or are writing a compiler.

**–no_compiler_vars**

(Default) Tells TotalView that it should not show variables created by the Fortran compiler.

**–dbfork** (Default) Catches the **fork()**, **vfork()**, and **execve()** system calls if your executable is linked with the **dbfork** library.

**–no_dbfork**

Tells TotalView that it should not catch **fork()**, **vfork()**, and **execve()** system calls even if your executable is linked with the **dbfork** library.

**–debug_file** *consoleoutputfile*

Redirects TotalView console output to a file named *consoleoutputfile*.

*Default:* All TotalView console output is written to **stderr**.

**–demangler=***compiler*

Overrides the demangler and mangler TotalView uses by default. The following indicate override options.

| | |
|---|---|
| **–demangler=compaq** | HP cxx on Linux (alpha) |
| **–demangler=dec** | HP Tru64 C++ or Fortran |
| **–demangler=gnu** | GNU C++ on Linux Alpha |
| **–demangler=gnu_dot** | GNU C++ on Linux x86 |
| **–demangler=gnu_v3** | GNU C++ Linux x86 |
| **–demangler=hp** | HP aCC compiler |
| **–demangler=irix** | SGI IRIX C++ |
| **–demangler=kai** | KAI C++ |
| **–demangler=kai3_n** | KAI C++ version 3.n |
| **–demangler=kai_4_0** | KAI C++ |
| **–demangler=spro** | SunPro C++ 4.0 or 4.2 |

| | |
|---|---|
| –demangler=spro5 | SunPro C++ 5.0 or later |
| –demangler=sun | Sun CFRONT C++ |
| –demangler=xlc | IBM XLC/VAC++ compilers |

–display *displayname*

Set the name of the X Windows display to *displayname*. For example, **–display vinnie:0.0** will display TotalView on the machine named "vinnie."

*Default:* The value of your **DISPLAY** environment variable.

–dll_ignore_prefix *list*

The colon-separated argument to this option tells TotalView that it should ignore files having this prefix when making a decision to ask about stopping the process when it *dlopens* a dynamic library. If the DLL being opened has any of the entries on this list as a prefix, the question is not asked.

–dll_stop_suffix *list*

The colon-separated argument to this option tells TotalView that if the library being opened has any of the entries on this list as a suffix, it should ask if it should open the library.

–dpvm

HP Tru64 UNIX *only*: Enable support for debugging the HP Tru64 UNIX implementation of Parallel Virtual Machine (PVM) applications.

–no_dpvm

HP Tru64 UNIX *only*: (Default) Disables support for debugging the HP Tru64 UNIX implementation of PVM applications.

–dump_core

Allows TotalView to dump a core file of itself when an internal error occurs. This is used to help Etnus debug TotalView problems.

–no_dumpcore

(Default) Does not allow TotalView to dump a core file when it gets an internal error.

–e *commands*

Tells TotalView to immediately execute the CLI commands named within this argument. All information you enter here is sent directly to the CLI's Tcl interpreter. For example, the following writes a string to **stdout**:

```
cli -e 'puts hello'
```

You can have more than one **–e** option on a command line.

–foreground *color*

Sets the general foreground color (that is, the text color) to *color*.

*Default:* black

–fg *color* Same as **–foreground**.

**–f9x_demangler=*compiler***

Overrides the Fortran demangler and mangler TotalView uses by default. The following indicate override options.

| | |
|---|---|
| **–demangler=spro_f9x_4** | SunPro Fortran, 4.0 or later |
| **–demangler=xlf** | IBM Fortran |

**–global_types**

(Default) Lets TotalView assume that type names are globally unique within a program and that all type definitions with the same name are identical. In C++, the standard asserts that this must be true for standard-conforming code.

If this option is set, TotalView will attempt to replace an opaque type (**struct foo *p;**) declared in one module, with an identically named defined type in a different module.

If TotalView has read the symbols for the module containing the non-opaque type definition, then when displaying variables declared with the opaque type, TotalView will automatically display the variable by using the non-opaque type definition.

**–no_global_types**

Specifies that TotalView *cannot* assume that type names are globally unique in a program. You should specify this option if your code has multiple different definitions of the same named type, since otherwise TotalView can use the wrong definition for an opaque type.

**–kcc_classes**

(Default) Converts structure definitions output by the KCC compiler into classes that show base classes and virtual base classes in the same way as other C++ compilers. See the description of the **TV::kcc_classes** variable for a description of the conversions that TotalView performs.

**–no_kcc_classes**

Specifies that TotalView will not convert structure definitions output by the KCC compiler into classes. Virtual bases will show up as pointers, rather than as data.

**–lb**

(Default) Loads action points automatically from the *filename*.**TVD.v3breakpoints** file, providing the file exists.

**–nlb**

Tells TotalView that it should not automatically load action points from an action points file.

**–message_queue**

(Default) Enables the display of MPI message queues when debugging an MPI program.

**–mqd**

Same as **–message_queue**.

**–no_message_queue**

Disables the display of MPI message queues when you are debugging an MPI program. This might be useful if

something is overwriting the message queues and causing TotalView to become confused.

–no_mqd
Same as **–no_message_queue**.

**–nptl_threads** Tells TotalView that your application is using NPTL threads. You only need use this option if default cannot determine that you are using this threads package.

–no_nptl_threads
Tells TotalView that you are not using the NPTL threads package. Use this option if TotalView thinks your application is using it and it isn't.

**–parallel** (Default) Enables handling of parallel program run-time libraries such as MPI, PE, and UPC.

–no_parallel
Disables handling of parallel program run-time libraries such as MPI, PE, and UPC. This is useful for debugging parallel programs as if they were single-process programs.

**–patch_area_base** *address*
Allocates the patch space dynamically at the given *address*. See "*Allocating Patch Space for Compiled Expressions*" in Chapter 14 of the *TotalView Users Guide*.

**–patch_area_length** *length*
Sets the length of the dynamically allocated patch space to the specified *length*. See "*Allocating Patch Space for Compiled Expressions*" in the *TotalView Users Guide*.

**–pid** *pid* Tells TotalView to attach to process *pid* after it starts executing.

**–pvm** Enables support for debugging the ORNL implementation of Parallel Virtual Machine (PVM) applications.

–no_pvm
(Default) Disables support for debugging the ORNL implementation of PVM applications.

**–remote** *hostname*[:*portnumber*]
Debugs an executable that is not running on the same machine as TotalView. For *hostname*, you can specify a TCP/IP host name (such as **vinnie**) or a TCP/IP address (such as **128.89.0.16**). Optionally, you can specify a TCP/IP port number for *portnumber*, such as **:4174**. When you specify a port number, you disable the autolaunch feature. For more information on the autolaunch feature, see "*Setting Single Process Server Launch*" in the *TotalView Users Guide*.

–r *hostname*[:*portnumber*]
Same as **–remote**.

**–s** *pathname*
Specifies the path name of a startup file that will be loaded and executed. This path name can be either an absolute or relative name.

You can have more than one **–s** option on a command line.

**–serial** *device*[:*options*]
Debugs an executable that is not running on the same machine as TotalView. For *device*, specify the device name of a serial line, such as **/dev/com1**. Currently, the only *option* you are allowed to specify is the baud rate, which defaults to **38400**. For more information on debugging over a serial line, see "*Debugging Over a Serial Line*" in Chapter 4 of the *TotalView Users Guide*.

**–search_path** *pathlist*
Specify a colon-separated list of directories that TotalView will search when it looks for source files. For example:

**totalview –search_path proj/bin:proj/util**

**–signal_handling_mode "***action_list***"**
Modifies the way in which TotalView handles signals. You must enclose the *action_list* string in quotation marks to protect it from the shell.

An *action_list* consists of a list of *signal_action* descriptions separated by spaces:

*signal_action*[ *signal_action*] ...

A signal action description consists of an action, an equal sign (=), and a list of signals:

*action*=*signal_list*

An *action* can be one of the following: **Error**, **Stop**, **Resend**, or **Discard**, For more information on the meaning of each action, see Chapter 3 of the *TotalView Users Guide*.

A *signal_specifier* can be a signal name (such as **SIGSEGV**), a signal number (such as 11), or a star (*), which specifies all signals. We recommend that you use the signal name rather than the number because number assignments vary across UNIX sessions.

The following rules apply when you are specifying an *action_list*:

(1) If you specify an action for a signal in an *action_list*, TotalView changes the default action for that signal.

(2) If you do not specify a signal in the *action_list*, TotalView does not change its default action for the signal.

(3) If you specify a signal that does not exist for the platform, TotalView ignores it.

(4) If you specify an action for a signal more than once, TotalView uses the last action specified.

If you need to revert the settings for signal handling to TotalView's built-in defaults, use the **Defaults** button in the **File** > **Signals** dialog box.

For example, here's how to set the default action for the **SIGTERM** signal to resend:

```
"Resend=SIGTERM"
```

Here's how to set the action for **SIGSEGV** and **SIGBUS** to error, the action for **SIGHUP** to resend, and all remaining signals to stop:

```
"Stop=* Error=SIGSEGV,SIGBUS Resend=SIGHUP"
```

**–shm** "*action_list*"

Same as **–signal_handling_mode**.

**–tvhome** *pathname*

The directory from which TotalView reads preferences and other related information and the directory to which it writes this information.

**–use_aix_fast_trap** Tells TotalView that it support the AIX fast trap mechanism. You must set this option on the command line as there is no TotalView variable that can be set to perform this action.

Your operating system may not be configured correctly to support this option. See the *TotalView Release Notes* for more information.

**–user_threads** (Default) Enables handling of user-level (M:N) thread packages on systems where two-level (kernel and user) thread scheduling is supported.

**–no_user_threads**

Disables handling of user-level (M:N) thread packages. This option may be useful in situations where you need to debug kernel-level threads, but in most cases, this option is of little use on systems where two-level thread scheduling is used.

**–xterm_name** *pathname*

Sets the name of the program that TotalView will use when it needs to create a the CLI. If you do not use this command or have not set the **TV::xterm_name** variable, TotalView will attempt to create an **xterm** window.

**–verbosity** *level* Sets the verbosity level of TotalView-generated messages to *level*, which may be one of **silent**, **error**, **warning**, or **info**.

*Default:* **info**

# TotalView Debugger Server (tvdsvr) Command Syntax

7

This chapter summarizes the syntax of the TotalView Debugger Server command, **tvdsvr**, which is used for remote debugging. For more information on remote debugging, refer to "*Setting Up Remote Debugging Sessions*" in the *TotalView Users Guide*.

Topics in this chapter are:

- The **tvdsvr** Command and Its Options
- Replacement Characters

## The tvdsvr Command and Its Options

*Format:* **tvdsvr** {**–server** | **–callback** *hostname*:*port* | **–serial** *device*} [*other options*]

*Description:* The **tvdsvr** debugger server allows TotalView to control and debug a program on a remote machine. To accomplish this, the **tvdsvr** program must run on the remote machine, and it must have access to the executables being debugged. These executables must have the same absolute path name as the executable that TotalView is debugging, or the **PATH** environment variable for **tvdsvr** must include the directories containing the executables.

You must specify a **–server**, **–callback**, or **–serial** option with the **tvdsvr** command. By default, TotalView automatically launches **tvdsvr** using the **–callback** option, and the server establishes a connection with TotalView. (Automatically launching the server is called *autolaunching*.)

If you prefer not to automatically launch the server, you can start **tvdsvr** manually and specify the **–server** option. Be sure to note the password that **tvdsvr** prints out with the message:

pw = *hexnumhigh*:*hexnumlow*

TotalView will prompt you for *hexnumhigh*:*hexnumlow* later. By default, **tvdsvr** automatically generates a password that it uses when estab-

lishing connections. If desired, you can set your own password by using the –set_pw option.

To connect to the tvdsvr from TotalView, you use the Fille > New Program Dialog Box and must specify the host name and TCP/IP port number, *hostname*:*portnumber* on which tvdsvr is running. Then, TotalView prompts you for the password for tvdsvr.

**Options:** The following options name the port numbers and passwords that TotalView uses to connect with tvdsvr.

–callback *hostname*:*port*

(Autolaunch feature only) Immediately establishes a connection with a TotalView process running on *hostname* and listening on *port*, where *hostname* is either a host name or TCP/IP address. If tvdsvr cannot connect with TotalView, it exits.

If you use the –port, –search_port, or –server options with this option, tvdsvr ignores them.

–callback_host *hostname*

Names the host upon which the callback is made. The *hostname* argument indicates the machine upon which TotalView is running. This option is most often used with a bulk launch.

–callback_ports *port-list*

Names the ports on the host machines that are used for callbacks. The *port-list* argument contains a comma-separated list of the host names and TCP/IP port numbers (*hostname*:*port*,*hostname*:*port*...) on which TotalView is listening for connections from tvdsvr. This option is most often used with a bulk launch.

For more information, see Chapter 4, "*Setting Up Remote Debugging Sessions*" in the *TotalView Users Guide*.

–debug_file *console_outputfile*

Redirects TotalView Debugger Server console output to a file named *console_outputfile*.

*Default:* All console output is written to stderr.

–dpvm

Uses the HP Tru64 UNIX implementation of the Parallel Virtual Machine (DPVM) library process as its input channel and registers itself as the DPVM tasker.

This option is not intended for users launching tvdsvr manually. When you enable DPVM support within TotalView, TotalView automatically uses this option when it launches tvdsvr.

–port *number*

Sets the TCP/IP port number on which tvdsvr should communicate with TotalView. If this port is busy, tvdsvr does not select an alternate port number (that is, it

won't communicates with anything) unless you also specify **–search_port**.

*Default:* 4142

**–pvm**

Uses the ORNL implementation of the Parallel Virtual Machine (PVM) library process as its input channel and registers itself as the ORNL PVM tasker.

This option is not intended for users launching tvdsvr manually. When you enable PVM support within TotalView, TotalView automatically uses this option when it launches **tvdsvr**.

**–search_port**

Searches for an available TCP/IP port number, beginning with the default port (4142) or the port set with the **–port** option and continuing until one is found. When the port number is set, **tvdsvr** displays the chosen port number with the following message:

**port** = *number*

Be sure that you remember this port number, since you will need it when you are connecting to this server from TotalView.

**–serial** *device*[:*options*]

Waits for a serial line connection from TotalView. For *device*, specifies the device name of a serial line, such as **/dev/com1**. The only *option* you can specify is the baud rate, which defaults to **38400**. For more information on debugging over a serial line, see "*Debugging Over a Serial Line*" in Chapter 4 of the *TotalView Users Guide*.

**–server**

Listens for and accepts network connections on port 4142 (default).

Using **–server** can be a security problem. Consequently, you must explicitly enable this feature by placing an empty file named **tvdsvr.conf** in your **/etc** directory. This file must be owned by user ID 0 (root). When **tvdsvr** encounters this option, it checks if this file exists. This file's contents are ignored.

You can use a different port by using one of the following options: **–search_port** or **–port**. To stop **tvdsvr** from listening and accepting network connections, you must terminate it by pressing Ctrl+C in the terminal window from which it was started or by using the **kill** command.

**–set_pw** *hexnumhigh*:*hexnumlow*

Sets the password to the 64-bit number specified by the *hexnumhigh* and *hexnumlow* 32-bit numbers. When a connection is established between **tvdsvr** and TotalView, the 64-bit password passed by TotalView must match this password set with this option. **tvdsvr** displays the selected number in the following message:

**pw** = *hexnumhigh*:*hexnumlow*

We recommend using this option to avoid connections by other users.

If necessary, you can disable password checking by specifying the "–set_pw 0:0" option with the tvdsvr command. Disabling password checking is dangerous; it allows anyone to connect to your server and start programs, including shell commands, using your UID. Therefore, we do not recommend disabling password checking.

–set_pws *password-list*

Sets 64-bit passwords. TotalView must supply these passwords when **tvdsvr** establishes the connection with it. The argument to this command is a comma-separated list of passwords that TotalView automatically generates. This option is most often used with a bulk launch.

For more information, see Chapter 4, "*Setting Up Remote Debugging Sessions*" in the *TotalView Users Guide*.

–verbosity *level*

Sets the verbosity level of TotalView Debugger Server-generated messages to *level*, which may be one of **silent**, **error**, **warning**, or **info**.

*Default:* info

–working_directory *directory*

Makes *directory* the directory to which TotalView will be connected.

Note that the command assumes that the host machine and the target machine mount identical file systems. That is, the path name of the directory to which TotalView is connected must be identical on both the host and target machines.

After performing this operation, the TotalView Debugger Server is started.

## Replacement Characters

When placing a **tvdsvr** command in a **Server Launch** or **Bulk Launch** string (see the **File > Preferences** command within the online Help for more information), you will need to use special replacement characters. When your program needs to launch a remote process, TotalView replaces these command characters with what they represent. Here are the replacement characters:

%B

Expands to the bin directory where **tvdsvr** is installed.

%C

Is replaced by the name of the server launch command being used. On most platforms, this is **rsh**. On HP, this command is **remsh**. If the **TVDSVRLAUNCHCMD** environ-

ment variable exists, TotalView will use its value instead of its platform-specific value.

**%D** Is replaced by the absolute path name of the directory to which TotalView will be connected.

**%F** Contains the "tracer configuration flags" that need to be sent to **tvdsvr** processes. These are system-specific startup options that the **tvdsvr** process needs.

**%H** Expands to the host name of the machine upon which TotalView is running. (This replacement character is most often used in bulk server launch commands. However, it can be used in a regular server launch and within a **tvdsvr** command contained within a temporary file.)

**%L** If TotalView is launching one process, this is replaced by the host name and TCP/IP port number (*hostname*:*port*) on which TotalView is listening for connections from **tvdsvr**.

If a bulk launch is being performed, TotalView replaces this with a comma-separated list of the host names and TCP/IP port numbers (*hostname*:*port*,*hostname*:*port*...) on which TotalView is listening for connections from **tvdsvr**.

For more information, see Chapter 4, "*Setting Up Remote Debugging Sessions*" in the *TotalView Users Guide*.

**%N** Is replaced by the number of servers that TotalView will launch. This is only used in a bulk server launch command.

**%P** If TotalView is launching one process, this is replaced by the password that TotalView automatically generated.

If a bulk launch is being performed, TotalView replaces this with a comma-separated list of 64-bit passwords.

**%R** Is replaced by the host name of the remote machine specified in the **File > New Program** command.

**%S** If TotalView is launching one process, it replaces this symbol with the port number on the machine upon which the debugger is running.

If a bulk server launch is being performed, TotalView replaces this with a comma-separated list of port numbers.

**%t1** and **%t2** Is replaced by files that TotalView creates containing information it generates. This is only available in a bulk launch.

These temporary files have the following structure:

(1) An optional header line containing initialization commands required by your system.

(2) One line for each host being connected to, containing host-specific information.

(3) An optional trailer line containing information needed by your system to terminate the temporary file.

The **File > Preferences Bulk Server** Page allows you to define templates for the contents of temporary files. These files may use these replacement characters. The **%N**, **%t1**, and **%t2** replacement characters can only be used within header and trailer lines of temporary files. All other characters can be used in header or trailer lines or within a host line defining the command that initiates a single-process server launch. In header or trailer lines, they behave as defined for a bulk launch within the host line. Otherwise, they behave as defined for a single-server launch

%V — Is replaced by the current TotalView verbosity setting.

# Part III: Platforms and Operating Systems

The three chapters in this part of the Reference Guide describe information that is unique to the computers, operating systems, and environments in which TotalView runs.

Chapter 8: Compilers and Platforms
: Here you will find general information on the compilers and runtime environments that TotalView supports. This chapter also contains commands for starting TotalView and information on linking with the **dbfork** library.

Chapter 9: Operating Systems
: While how you use TotalView is the same on all operating systems, there are some things you will need to know that are differ from platform to platform.

Chapter 10: Architectures
: When debugging assembly-level functions, you will need to know how TotalView refers to your machines registers.

# Compilers and Platforms

# 8

This chapter describes the compilers and parallel runtime environments used on platforms supported by TotalView. You must refer to the TotalView Release Notes included in the TotalView distribution for information on the specific compiler and runtime environment supported by TotalView.

For information on supported operating systems, please refer to Chapter 9, "*Operating Systems*," on page 229.

Topics in this chapter are:

- Compiling with Debugging Symbols
- Using Exception Data on Tru64 UNIX
- Linking with the dbfork Library

## Compiling with Debugging Symbols

You need to compile programs with the **–g** option and possibly other compiler options so that debugging symbols are included. This section shows the specific compiler commands to use for each compiler that TotalView supports.

*Please refer to the release notes in your TotalView distribution for the latest information about supported versions of the compilers and parallel runtime environments listed here.*

### HP Alpha Running Linux

Table  lists the procedures to compile programs on HP Alpha running Linux.

| Compiler | Compiler Command Line |
|---|---|
| HP Alpha Linux C | **ccc –g** *program*.**c** |
| HP Alpha Linux Fortran | **cfal –g** *program*.**f** |
| GCC C | **gcc –g** *program*.**c** |

| Compiler | Compiler Command Line |
|---|---|
| GCC C++ | g++ –g *program*.cxx |
| GCC Fortran | g77 –g *program*.f |

## HP Tru64 UNIX

Table  lists the procedures to compile programs on HP Tru64 UNIX.

| Compiler | Compiler Command Line |
|---|---|
| HP Tru64 UNIX C | cc –g *program*.c |
| HP Tru64 UNIX C++ | cxx –g *program*.cxx |
| HP Tru64 UNIX Fortran 77 | f77 –g *program*.f |
| HP Tru64 UNIX Fortran 90 | f90 –g *program*.f90 |
| HP Tru64 UPC compiler | upc -g [-fthreads *n*] *program*.upc |
| GCC C | gcc –g *program*.c |
| GCC C++ | g++ –g *program*.cxx |
| KAI C | KCC +K0 *program*.c |
| KAI C++ | KCC +K0 *program*.cxx |
| KAI Guide C (OpenMP) | guidec –g +K0 *program*.c |
| KAI Guide C++ (OpenMP) | guidec –g +K0 *program*.cxx |
| KAI Guide F77 (OpenMP) | guidef77 –g –WG,–cmpo=i *program*.f |

When compiling with KCC for debugging, we recommend that you use the +K0 option and not the –g option. Also, the –WG,–cmpo=i option to the guidef77 command may not be required on all versions because –g can imply these options.

## HP-UX

Table  lists the procedures to compile programs on HP-UX.

| Compiler | Compiler Command Line |
|---|---|
| HP ANSI C | cc –g *program*.c |
| HP C++ | aCC –g *program*.cxx |
| HP Fortran 90 | f90 –g *program*.f90 |
| KAI C | KCC +K0 *program*.c |
| KAI C++ | KCC +K0 *program*.cxx |
| KAI Guide C (OpenMP) | guidec –g +K0 *program*.c |
| KAI Guide C++ (OpenMP) | guidec –g +K0 *program*.cxx |
| KAI Guide F77 (OpenMP) | guidef77 –g –WG,–cmpo=i *program*.f |

When compiling with KCC for debugging, we recommend that you use the +K0 option and not the –g option. Also, the –WG,–cmpo=i option to the guidef77 command may not be required on all versions because –g can imply these options.

## IBM AIX on RS/6000 Systems

Table  lists the procedures to compile programs on IBM RS/6000 systems running AIX.

| Compiler | Compiler Command Line |
|---|---|
| GCC C | gcc –g *program*.c |
| GCC C++ | g++ –g *program*.cxx |
| IBM xlc C | xlc –g *program*.c |

| Compiler | Compiler Command Line |
|---|---|
| IBM xlC C++ | **xlC –g** *program*.**cxx** |
| IBM xlf Fortran 77 | **xlf –g** *program*.**f** |
| IBM xlf90 Fortran 90 | **xlf90 –g** *program*.**f90** |
| KAI C | **KCC +K0 –qnofullpath** *program*.**c** |
| KAI C++ | **KCC +K0 –qnofullpath** *program*.**cxx** |
| KAI Guide C (OpenMP) | **guidec –g +K0** *program*.**c** |
| KAI Guide C++ (OpenMP) | **guidec –g +K0** *program*.**cxx** |
| KAI Guide F77 (OpenMP) | **guidef77 –g –WG,–cmpo=i** *program*.**f** |

You must set up to seven variables when debugging threaded applications. Here's what you would do in the C shell:

```
setenv AIXTHREAD_MNRATIO        "1:1"
setenv AIXTHREAD_SLPRATIO       "1:1"
setenv AIXTHREAD_SCOPE          "S"
setenv AIXTHREAD_COND_DEBUG     "ON"
setenv AIXTHREAD_MUTEX_DEBUG    "ON"
setenv AIXTHREAD_RWLOCK_DEBUG   "ON"
```

The first three variables must be set. Depending upon what you need to examine, you will also need to set one or more of the "DEBUG" variables.

Do not, however, set the **AIXTHREAD_DEBUG** variable. If you have set it, you should unset it before running TotalView

*Setting these variables can slow down your application's performance. None of them should be set when you are running non-debugging versions of your program.*

When compiling with KCC, you must specify the **–qnofullpath** option; KCC is a preprocessor that passes its output to the IBM xlc C compiler. It will discard **#line** directives necessary for source-level debugging if you do not use the **–qfullpath** option. We also recommend that you use the **+K0** option and not the **–g** option.

When compiling with **guidef77**, the **–WG,–cmpo=i** option may not be required on all versions because **–g** can imply these options.

When compiling Fortran programs with the C preprocessor, pass the **–d** option to the compiler driver. For example: **xlf –d –g program.F**

If you will be moving any program compiled with any of the IBM *xl* compilers from its creation directory, or you do not want to set the search directory path during debugging, use the **–qfullpath** compiler option. For example:

```
xlf -qfullpath -g -c program.f
```

## Linux Running on an x86 Platform

Table  lists the procedures to compile programs on Linux x86 platforms.

| Compiler | Compiler Command Line |
|---|---|
| Absoft Fortran 77 | **f77 –gdwarf2** *program*.**f**<br>**f77 –gdwarf2** *program*.**for** |
| Absoft Fortran 90 | **f90 –gdwarf2** *program*.**f90** |

| Compiler | Compiler Command Line |
|---|---|
| Absoft Fortran 95 | f95 –gdwarf2 *program*.f95 |
| GCC C | gcc –g *program*.c |
| GCC C++ | g++ –g *program*.cxx |
| G77 | g77 –g *program*.f |
| Intel C++ Compiler | icc –g *program*.cxx |
| Intel Fortran Compiler | ifc –g *program*.f |
| KAI C | KCC +K0 *program*.c |
| KAI C++ | KCC +K0 *program*.cxx |
| KAI Guide C (OpenMP) | guidec –g +K0 *program*.c |
| KAI Guide C++ (OpenMP) | guidec –g +K0 *program*.cxx |
| KAI Guide F77 (OpenMP) | guidef77 –g –WG,–cmpo=i *program*.f |
| Lahey/Fujitsu Fortran | lf95 –g *program*.f |
| PGI Fortran 90 | pgf90 –g *program*.f |

When compiling with KCC for debugging, we recommend that you use the +K0 option and not the –g option. Also, the –WG,–cmpo=i option to the guidef77 command may not be required on all versions because –g can imply these options.

## Linux Running on an Itanium Platform

Table  lists the procedures to compile programs running on the Intel Itanium platform.

| Compiler | Compiler Command Line |
|---|---|
| GCC C | gcc –g *program*.c |
| GCC C++ | g++ –g *program*.cxx |
| G77 | g77 –g *program*.f |
| Intel C++ Compiler | icc –g *program*.cxx |
| Intel Fortran Compiler | ifc –g *program*.f |

## SGI IRIX-MIPS Systems

Table  lists the procedures to compile programs on SGI MIPS systems running IRIX.

| Compiler | Compiler Command Line |
|---|---|
| GCC C | gcc –g *program*.c |
| GCC C++ | g++ –g *program*.cxx |
| Intrepid (GCC UPC) | upc -g [-fthreads *n*] *program*.upc |
| KAI C | KCC +K0 *program*.c |
| KAI C++ | KCC +K0 *program*.cxx |
| KAI Guide C (OpenMP) | guidec –g +K0 *program*.c |
| KAI Guide C++ (OpenMP) | guidec –g +K0 *program*.cxx |
| KAI Guide F77 (OpenMP) | guidef77 –g –WG,–cmpo=i *program*.f |
| SGI MIPSpro 90 | f90 –n32 –g *program*.f90<br>f90 –64 –g *program*.f90 |
| SGI MIPSpro C | cc –n32 –g *program*.c<br>cc –64 –g *program*.c |

| Compiler | Compiler Command Line |
|---|---|
| SGI MIPSpro C++ | CC –n32 –g *program*.cxx<br>CC –64 –g *program*.cxx |
| SGI MIPSpro77 | f77 –n32 –g *program*.f<br>f77 –64 –g *program*.f |

TotalView does not support compiling with –32, which is the default for some compilers. You must specify either –n32 or –64.

When compiling with KCC for debugging, we recommend that you use the +K0 option and not the –g option. Also, the –WG,–cmpo=i option to the guidef77 command may not be required on all versions because –g can imply these options.

### SunOS 5 on SPARC

Table  lists the procedures to compile programs on SunOS 5 SPARC.

| Compiler | Compiler Command Line |
|---|---|
| Apogee C | apcc –g *program*.c |
| Apogee C++ | apcc –g *program*.cxx |
| GCC C | gcc –g *program*.c |
| GCC C++ | g++ –g *program*.cxx |
| KAI C | KCC +K0 *program*.c |
| KAI C++ | KCC +K0 *program*.cxx |
| KAI Guide C (OpenMP) | guidec –g +K0 *program*.c |
| KAI Guide C++ (OpenMP) | guidec –g +K0 *program*.cxx |
| KAI Guide F77 (OpenMP) | guidef77 –g –WG,–cmpo=i *program*.f |
| SunPro/WorkShop C | cc –g *program*.c |
| SunPro/WorkShop C++ | CC –g *program*.cxx |
| SunPro/WorkShop Fortran 77 | f77 –g *program*.f |
| WorkShop Fortran 90 | f90 –g *program*.f90 |

When compiling with KCC for debugging, we recommend that you use the +K0 option and not the –g option. Also, the –WG,–cmpo=i option to the guidef77 command may not be required on all versions because –g can imply these options.

## Using Exception Data on Tru64 UNIX

If you receive the following error message when you load an executable into TotalView, you may need to compile your program so that it includes exception data.

```
Cannot find exception information. Stack backtraces may
not be correct.
```

To provide a complete stack backtrace in all situations, TotalView needs for you to include exception data with the compiled executable. To compile with exception data, you need to use the following options:

cc –Wl,–u,_fpdata_size *program.c*

where:

| | |
|---|---|
| –Wl | Passes the arguments that follow to another compilation phase (–W), which in this case is the linker (l). Each argument is separated by a comma (,). |
| –u,_fpdata_size | Causes the linker to mark the next argument (_fpdata_size) as undefined. This forces the exception data into the executable. |
| *program.c* | Is the name of your program. |

Compiling with exception data increases the size of your executable slightly. If you choose not to compile with exception data, TotalView can provide correct stack backtraces in most situations, but not in all situations.

## Linking with the dbfork Library

If your program uses the fork() and execve() system calls, and you want to debug the child processes, you need to link programs with the dbfork library.

### Linking with dbfork and HP Tru64 UNIX

Add one of the following command-line options to the command that you use to link your programs:

- /opt/totalview/alpha/lib/libdbfork.a
- –L/opt/totalview/alpha/lib –ldbfork

For example:

```
cc -o program program.c \
         -L/opt/totalview/alpha/lib -ldbfork
```

As an alternative, you can set the LD_LIBRARY_PATH environment variable and omit the –L option on the command line:

```
setenv LD_LIBRARY_PATH /opt/totalview/alpha/lib
```

### Linking with HP-UX

Add either the –ldbfork or –ldbfork_64 argument to the command that you use to link your programs. If you are compiling 32-bit code, use one of the following arguments:

- /opt/totalview/lib/hpux11-hppa/libdbfork.a
- –L/opt/totalview/hpux11-hppa/lib –ldbfork

For example:

```
cc -n32 -o program program.c \
         -L/opt/totalview/hpux11-hppa/lib -ldbfork
```

If you are compiling 64-bit code, use the following arguments:

- /opt/totalview/lib/hpux11-hppa/libdbfork_64.a
- –L/opt/totalview/hpux11-hppa/lib –ldbfork_64

For example:

```
cc -64 -o program program.c \
         -L/opt/totalview/hpux11-hppa/lib \
         -ldbfork_64
```

As an alternative, you can set the **LD_LIBRARY_PATH** environment variable and omit the **–L** command-line option. For example:

```
setenv LD_LIBRARY_PATH \
         /opt/totalview/hpux11-hppa/lib
```

## dbfork on IBM AIX on RS/6000 Systems

Add either the **–dbfork** or **–ldbfork_64** argument to the command that you use to link your programs. If you are compiling 32-bit code, use the following arguments:

- **/usr/totalview/lib/libdbfork.a –bkeepfile:/usr/totalview/lib/rs6000/libdbfork.a**
- **–L/usr/totalview/lib –ldbfork –bkeepfile:/usr/totalview/lib/rs6000/libdbfork.a**

For example:

```
cc -o program program.c \
   -L/usr/totalview/rs6000/lib/ -ldbfork \
   -bkeepfile:/usr/totalview/rs6000/lib/libdbfork.a
```

If you are compiling 64-bit code, use the following arguments:

- **/usr/totalview/lib/libdbfork_64.a **
  **–bkeepfile:/usr/totalview/rs6000/lib/libdbfork.a**
- **–L/usr/totalview/lib –ldbfork_64 **
  **–bkeepfile:/usr/totalviewrs6000//lib/libdbfork.a**

For example:

```
cc -o program program.c \
   -L/usr/totalview/rs6000/lib -ldbfork \
   -bkeepfile:/usr/totalview/rs6000/lib/libdbfork.a
```

When you use **gcc** or **g++**, use the **–Wl,–bkeepfile** option instead of using the **–bkeepfile** option, which will pass the same option to the binder. For example:

```
gcc -o program program.c \
   -L/usr/totalview/rs6000/lib -ldbfork -Wl, \
   -bkeepfile:/usr/totalview/rs6000/lib/libdbfork.a
```

### Linking C++ Programs with dbfork

You cannot use the **–bkeepfile** binder option with the IBM xlC C++ compiler. The compiler passes all binder options to an additional pass called **munch**, which will not handle the **–bkeepfile** option.

To work around this problem, we have provided the C++ header file **libdbfork.h**. You must include this file somewhere in your C++ program. This forces the components of the **dbfork** library to be kept in your executable. The file **libdbfork.h** is included only with the RS/6000 version of TotalView. This means that if you are creating a program that will run on more than one platform, you should place the **include** within an **#ifdef** statement's range. For example:

```
#ifdef _AIX
#include "/usr/totalview/rs6000/lib/libdbfork.h"
#endif
```

```
int main (int argc, char *argv[])
{
}
```

In this case, you would not use the –bkeepfile option and would instead link your program using one of the following options:

- /usr/totalview/rs6000/lib/libdbfork.a
- –L/usr/totalview/rs6000/lib –ldbfork

## Linux

Add one of the following arguments or command-line options to the command that you use to link your programs:

- /usr/totalview/*platform*/lib/libdfork.a
- -L/usr/totalview/*platform*/lib –ldbfork

where *platform* is either linux-86 or linux-alpha.

For example:

```
cc -o program program.c \
        -L/usr/totalview/linux-86/lib -ldbfork
```

As an alternative, you can set the LD_LIBRARY_PATH environment variable and omit the –L option on the command line:

```
setenv LD_LIBRARY_PATH /usr/totalview/platform/lib
```

where *platform* is again either linux-86 or linux-alpha.

## SGI IRIX6-MIPS

Add one of the following arguments or command-line options to the command that you use to link your programs.

If you are compiling your code with –n32, use the following arguments:

- /opt/totalview/irix6-mips/lib/libdbfork_n32.a
- –L/opt/totalview/irix6-mips/lib –ldbfork_n32

For example:

```
cc -n32 -o program program.c \
        -L/opt/totalview/irix6-mips/lib -ldbfork_n32
```

If you are compiling your code with –64, use the following arguments:

- /opt/totalview/irix6-mips/lib/libdbfork.a_n64.a
- –L/opt/totalview/irix6-mips/lib –ldbfork_n64

For example:

```
cc -64 -o program program.c \
        -L/opt/totalview/irix6-mips/lib -ldbfork_n64
```

As an alternative, you can set the LD_LIBRARY_PATH environment variable and omit the –L option on the command line:

```
setenv LD_LIBRARY_PATH /opt/totalview/irix6-mips/lib
```

## SunOS 5 SPARC

Add one of the following command line arguments or options to the command that you use to link your programs:

- /opt/totalview/sun5/lib/libdbfork.a
- –L/opt/totalview/sun5/lib –ldbfork

For example:

```
cc -o program program.c \
        -L/opt/totalview/sun5/lib -ldbfork
```

As an alternative, you can set the **LD_LIBRARY_PATH** environment variable and omit the **–L** option on the command line:

```
setenv LD_LIBRARY_PATH /opt/totalview/sun5/lib
```

# Operating Systems 9

This chapter describes the operating system features that can be used with TotalView. This chapter includes the following topics:

- Supported Operating Systems
- Mounting the /proc File System (HP Tru64 UNIX, IRIX, and SunOS 5 only)
- Swap Space
- Shared Libraries
- Debugging Dynamically Loaded Libraries
- Remapping Keys (Sun Keyboards only)
- Expression System

## Supported Operating Systems

Here is an overview of operating systems and some of the environments supported by TotalView at the time when this book was printed. As this book isn't printed nearly as often as vendors update compilers and operating systems, the compiler and operating system versions mentioned here may be obsolete. For a definitive list, see the *TotalView Platforms* document on our web site. You can locate this document by going to **http://www.etnus.com/Support/docs/**".

- HP Alpha workstations running HP Tru64 UNIX versions V4.0F, V5.1, and V5.1A. Many versions require patches. See "HP UNIX Patch Procedures" in the *TotalView Platforms* document for instructions.
- HP PA-RISC 1.1 or 2.0 systems running HP-UX Version 11.00,11.10, and 11.11i.
- IBM RS/6000 and SP systems running AIX versions 4.3.3 and 5.1L.
- Linux Red Hat 7.1, 7.2, 7.3, and 8.0.
- SGI IRIX 6.5.1.15f and 6.5.1.16f on any MIPS R4000, R4400, R4600, R5000, R8000, R10000, and R12000 processor-based systems.
- Sun Sparc Solaris 7, 8 and 9.

# Mounting the /proc File System

To debug programs on HP Tru64 UNIX, SunOS 5, and IRIX with TotalView, you need to mount the **/proc** file system.

If you receive one of the following errors from TotalView, the **/proc** file system might not be mounted:

- `job_t::launch, creating process: process not found`
- `Error launching process while trying to read dynamic symbols`
- `Creating Process... Process not found`
  `Clearing Thrown Flag`
  `Operation Attempted on an unbound d_process object`

To determine whether the **/proc** file system is mounted, enter the appropriate command from the following table.

| Operating System | Command |
|---|---|
| HP Tru64 UNIX | `% /sbin/mount -t procfs`<br>`/proc on /proc type procfs (rw)` |
| SunOS 5 | `% /sbin/mount \| grep /proc`<br>`/proc on /proc read/write/setuid on ...` |
| IRIX | `% /sbin/mount \| grep /proc`<br>`/proc on /proc type proc (rw)` |

If you receive one of these messages from the **mount** command, the **/proc** file system is mounted.

## Mounting /proc HP Tru64 UNIX and SunOS 5

To make sure that the **/proc** file system is mounted each time your system boots, add the appropriate line from the following table to the appropriate file.

| Operating System | Name of File | Line to add |
|---|---|---|
| HP Tru64 UNIX | /etc/fstab | /proc /proc procfs rw 0 0 |
| SunOS 5 | /etc/vfstab | /proc - /proc proc - no - |

Then, to mount the **/proc** file system, enter the following command:

```
/sbin/mount /proc
```

## Mounting proc SGI IRIX

To make sure that the **/proc** file system is mounted each time your system boots, make sure that **/etc/rc2** issues the **/etc/mntproc** command. Then, to mount the **/proc** file system, enter the following command:

```
/etc/mntproc
```

# Swap Space

Debugging large programs can exhaust the swap space on your machine. If you run out of swap space, TotalView exits with a fatal error, such as:

- `Fatal Error: Out of space trying to allocate`

  This error indicates that TotalView failed to allocate dynamic memory. It can occur anytime during a TotalView session. It can also indicate that the data size limit in the C shell is too small. You can use the C shell's **limit** command to increase the data size limit. For example:

  ```
  limit datasize unlimited
  ```

- `job_t::launch, creating process: Operation failed`

  This error indicates that the **fork()** or **execve()** system call failed while TotalView was creating a process to debug. It can happen when TotalView tries to create a process.

## Swap Space on HP Tru64 UNIX

To find out how much swap space has been allocated and is currently being used, use the **swapon** command on HP Tru64 UNIX.

To find out how much swap space is in use while you are running TotalView:

```
/bin/ps -o LFMT
```

To add swap space, use the **/sbin/swapon**(8) command. You must be logged in as **root** to use this command. For more information, refer to the online manual page for this command.

## Swap Space on HP HP-UX

The **swapinfo** command on an HP-UX system lets you find out how much swap space is allocated and is being used.

To find out how much swap space is being used while TotalView is running, enter:

```
/usr/bin/ps -lf
```

Here is an example of what you might see. The **SZ** column shows the pages occupied by a program.

To add swap space, use the**/usr/sbin/swapon**(1M) command or the **SAM** (System Administration Manager) utility. If you use **SAM**, invoke the **Swap** command in the **Disks and File Systems** menu.

### Maximum Data Size

To see the current data size limit in the C shell, enter:

```
limit datasize
```

The following command displays the current *hard* limit:

```
limit -h datasize
```

If the current limit is lower than the hard limit, you can easily raise the current limit. To change the current limit, enter:

**limit datasize** *new_data_size*

If the hard limit is too low, you must reconfigure and rebuild the kernel, and then reboot. This is most easily done using **SAM**.

To change **maxdsiz**, use the following path through the **SAM** menus:

```
Kernel Configuration > Configurable Parameters >
   maxdsiz > Actions > Modify Configurable Parameter >
   Specify New Formula/Value > Formula/Value
```

You can now enter the new maximum data segment size.

You may also need to change the value for **maxdsiz_64**.

Here is the command that lets you rebuild the kernel with these changed values:

```
Configurable Parameter > Actions >
Process New Kernel
```

Answer **yes** to process the kernel modifications, **yes** to install the new kernel, and **yes** again to reboot the machine with the new kernel.

When the machine reboots, the value you set for **maxdsiz** should be the new hard limit.

## Swap Space on IBM AIX

To find out how much swap space has been allocated and is currently being used, use the **pstat -s** command:

To find out how much swap space is in use while you are running TotalView:

1. Start TotalView with a large executable:

   ```
   totalview executable
   ```

   Press Ctrl+Z to suspend TotalView.
2. Use the following command to see how much swap space TotalView is using:

   ```
   ps u
   ```

   For example, in this case the value in the SZ column is 5476 KB:

   ```
   USER    PID %CPU %MEM    SZ  RSS    TTY  ...
   smith 15080  0.0 6.0 5476 5476  pts/1 ...
   ```

To add swap space, use the AIX system management tool, **smit**. Use the following path through the **smit** menus:

```
System Storage Management > Logical Volume Manager >
   Paging Space
```

## Swap Space on Linux

To find out how much swap space has been allocated and is currently being used, use either the **swapon** or **top** commands on Linux:

You can use the **mkswap**(8) command to create swap space. The **swapon**(8) command tells Linux that it should use this space.

## Swap Space on SGI IRIX

To find out how much swap space has been allocated and is currently being used, use the **swap** command:

To find out how much swap space is in use while you are running TotalView:

1. Start TotalView with a large executable:

   **totalview** *executable*

   Press Ctrl+Z to suspend TotalView.

2 Use the following command to see how much swap space TotalView is using:

```
/bin/ps -l
```

Use the following command to determine the number of bytes in a page:

```
sysconf PAGESIZE
```

To add swap space, use the **mkfile(1M)** and **swap(1M)** commands. You must be root to use these commands. For more information, refer to the online manual pages for these commands.

### Swap Space on SunOS 5

To find out how much swap space has been allocated and is currently being used, use the **swap -s** command:

To find out how much swap space is in use while you are running TotalView:

1 Start TotalView with a large executable:

**totalview** *executable*

Press Ctrl+Z to suspend TotalView.

2 Use the following command to see how much swap space TotalView is using:

```
/bin/ps -l
```

To add swap space, use the **mkfile(1M)** and **swap(1M)** commands. You must be **root** to use these commands. For more information, refer to the online manual pages for these commands.

## Shared Libraries

TotalView supports dynamically linked executables, that is, executables that are linked with shared libraries.

When you start TotalView with a dynamically linked executable, TotalView loads an additional set of symbols for the shared libraries, as indicated in the shell from which you started TotalView. To accomplish this, TotalView:

1 Runs a sample process and discards it.
2 Reads information from the process.
3 Reads the symbol table for each library.

When you create a process without starting it, and the process does not include shared libraries, the PC points to the entry point of the process, usually the **start** routine. If the process does include shared libraries, however, TotalView takes the following actions:

- Runs the dynamic loader (SunOS 5: **ld.so,** HP Tru64 UNIX: **/sbin/loader**, Linux: **/lib/ld-linux.so.?**, IRIX: **rld**).
- Sets the PC to point to the location after the invocation of the dynamic loader but before the invocation of C++ static constructors or the **main()** routine.

On HP-UX, *TotalView cannot stop the loading of shared libraries until after static constructors on shared library initialization routines have been run.*

When you attach to a process that uses shared libraries, TotalView takes the following actions:

- If you attached to the process after the dynamic loader ran, then TotalView loads the dynamic symbols for the shared library.
- If you attached to the process before it runs the dynamic loader, TotalView allows the process to run the dynamic loader to completion. Then, TotalView loads the dynamic symbols for the shared library.

If desired, you can suppress the recording and use of dynamic symbols for shared libraries by starting TotalView with the **–no_dynamic** option. Refer to Chapter 6, *"TotalView Command Syntax,"* on page 203 for details on this TotalView startup option.

If a shared library has changed since you started a TotalView session, you can use the **Group > Rescan Library** command to reload library symbol tables. Be aware that only some systems such as AIX permit you to reload library information.

## Changing Linkage Table Entries and LD_BIND_NOW

If you are executing a dynamically linked program, calls from the executable into a shared library are made using the *Procedure Linkage Table* (PLT). Each function in the dynamic library that is called by the main program has an entry in this table. Normally, the dynamic linker fills the PLT entries with code that calls the dynamic linker. This means that the first time that your code calls a function in a dynamic library, the runtime environment calls the dynamic linker. The linker will then modify the entry so that next time this function is called, it will not be involved.

This is not the behavior you want or expect when debugging a program because TotalView will do one of the following:

- Place you within the dynamic linker (which you don't want to see).
- Step over the function.

And, because the entry is altered, everything appears to work fine the next time you step into this function.

On most operating systems (except HP), you can correct this problem by setting the **LD_BIND_NOW** environment variable. For example:

```
setenv LD_BIND_NOW 1
```

This tells the dynamic linker that it should alter the PLT when the program starts executing rather than doing it when the program calls the function.

HP-UX does not have this (or an equivalent) variable. On HP systems, you can avoid this problem by using the **–B immediate** option the executable being debugged, or by invoking **chatr** with the **–B immediate** option. (See the **chatr** documentation for complete information on how to use this command.)

You will also have to enter **pxdb –s on**.

### Using Shared Libraries on HP-UX

The dynamic library loader on HP-UX loads shared libraries into shared memory. Writing breakpoints into code sections loaded in shared memory can cause programs not under TotalView's control to fail when they execute an unexpected breakpoint.

If you need to single-step or set breakpoints in shared libraries, you must set your application to load those libraries in private memory. This is done using HP's **pxdb** command.

```
pxdb -s on appname  (load shared libraries into
            private memory)
pxdb -s off appname  (load shared libraries into
            shared memory)
```

For 64-bit platforms, use **pxdb64** instead of **pxdb**. If the version of **pxdb64** supplied with HP's compilers does not work correctly, you may need to install an HP-supplied patch. You will find additional information in the *TotalView Release Notes*.

## Debugging Dynamically Loaded Libraries _

TotalView automatically reads the symbols of shared libraries that are dynamically loaded into your program at runtime. These libraries are ones that are loaded using **dlopen** (or, on IBM AIX, **load** and **loadbind**).

TotalView automatically detects these calls, and then loads the symbol table from the newly loaded libraries and plants any enabled saved breakpoints for these libraries. TotalView then decides whether to ask you about stopping the process to plant breakpoints. You will set these characteristics by using the **Dynamic Libraries** Page in the **File > Preferences** Dialog Box.

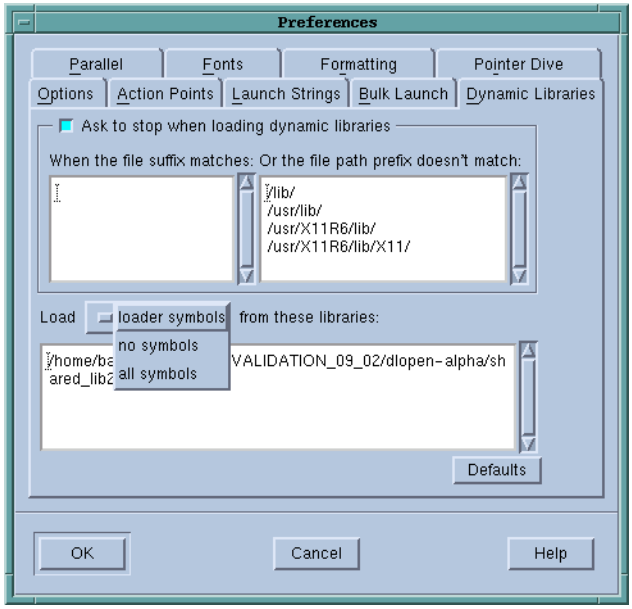


*Figure 5: File > Preferences Dialog Box: Dynamic Libraries Page*

TotalView decides according to the following rules:

1. If either the **Load symbols from dynamic libraries** or **Ask to stop when loading dynamic libraries** preference is set to **false**, TotalView *does not* ask you about stopping.
2. If one or more of the strings in the **When the file suffix matches** preference list is a suffix of the full library name (including the path), TotalView asks you about stopping.
3. If one or more of the strings in the **When the file path prefix does not match** list is a prefix of the full library name (including the path), TotalView *does not* ask you about stopping.
4. If the newly loaded libraries have any saved breakpoints, TotalView *does not* ask you about stopping.
5. If none of the rules above apply, TotalView asks you about stopping.

If TotalView does not ask you about stopping the process, the process is continued.

If TotalView decides to ask you about stopping, it displays a dialog box, asking if it should stop the process so you can set breakpoints. To stop the process, answer **Yes**. (See Figure 6.)

*Figure 6: Stop Process Question Dialog Box*

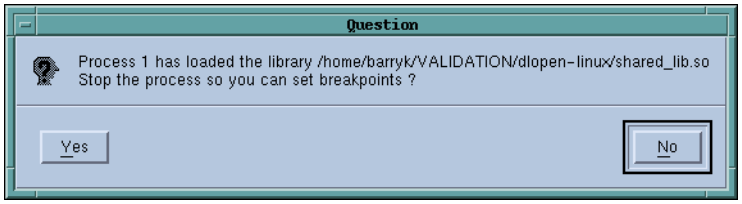


To allow the process to continue executing, answer **No**. Stopping the process allows you to insert breakpoints in the newly loaded shared library.

Do either or both of the following to tell TotalView if it should ask:

- If you can set the **–ask_on_dlopen** command-line option to **true**, or you can set the **–no_ask_on_dlopen** option to false.
- Unset the **Load symbols from dynamic libraries** preference.

The following table lists paths where you are not asked if TotalView should stop the process:

| Platform | Value | |
|---|---|---|
| HP Tru64 UNIX Alpha | /usr/shlib/<br>/usr/lib/cmplrs/cc/<br>/usr/local/lib/ | /usr/ccs/lib/<br>/usr/lib/<br>/var/shlib/ |
| HP-UX | /usr/lib/<br>/opt/langtools/lib/ | /usr/lib/pa20_64<br>/opt/langtools/lib/pa20_64/ |
| IBM AIX | /lib/<br>/usr/lpp/<br>/usr/dt/lib/ | /usr/lib/<br>/usr/ccs/lib/<br>/tmp/ |

| Platform | Value | |
|---|---|---|
| SGI IRIX | /lib/<br>/usr/local/lib/<br>/usr/lib32/<br>/lib64/<br>/usr/local/lib64 | /usr/lib/<br>/lib32/<br>/usr/local/lib32/<br>/usr/lib64/ |
| SUN Solaris 2.x | /lib/<br>/usr/ccs/lib/ | /usr/lib/ |
| Linux x86 | /lib | /usr/lib |
| Linux Alpha | /lib | /usr/lib |

The values you enter in the TotalView preference should be space-separated lists of the prefixes and suffixes to be used.

After starting TotalView, you can change these lists by using the **When the file suffix matches** and **And the file path prefix does not match** preferences.

### Known Limitations

Dynamic library support has the following known limitations:

- TotalView does not deal correctly with parallel programs that call **dlopen** on different libraries in different processes. TotalView requires that the processes have a uniform address space, including all shared libraries.
- TotalView does not yet fully support unloading libraries (using **dlclose**) and then reloading them at a different address using **dlopen**.

## Remapping Keys

On the SunOS 5 keyboard, you may need to remap the page-up and page-down keys to the prior and next **keysym** so that you can scroll TotalView windows with the page-up and page-down keys. To do so, add the following lines to your X Window System startup file:

```
# Remap F29/F35 to PgUp/PgDn
xmodmap -e 'keysym F29 = Prior'
xmodmap -e 'keysym F35 = Next'
```

## Expression System

Depending on the target platform, TotalView supports:

- An interpreted expression system only
- Both an interpreted and a compiled expression system

Unless stated otherwise below, TotalView supports interpreted expressions only.

### Expression System on HP Alpha Tru64 UNIX

On HP Tru64 UNIX, TotalView supports compiled and interpreted expressions. TotalView also supports assembly language in expressions.

## Expression System on IBM AIX

On IBM AIX, TotalView supports compiled and interpreted expressions. TotalView also supports assembly language in expressions.

Some program functions called from the TotalView expression system on the Power architecture cannot have floating-point arguments that are passed by value. However, in functions with a variable number of arguments, floating-point arguments *can* be in the varying part of the argument list. For example, you can include floating-point arguments with calls to **printf**:

```
double d = 3.14159;
printf("d = %f\n", d);
```

## Expression System on SGI IRIX

On IRIX, TotalView supports compiled and interpreted expressions. TotalView also supports assembler in expressions.

TotalView includes the SGI IRIX expression compiler. This feature does not use any MIPS-IV specific instructions. It does use MIPS-III instructions freely. It fully supports **–n32** and **–64** executables.

Due to limitations in dynamically allocating patch space, compiled expressions are disabled by default on SGI IRIX. To enable compiled expressions, use the **TV::compile_expressions** CLI variable to set the option to **true**. This variable tells TotalView to find or allocate patch space in your program for code fragments generated by the expression compiler.

If you enable compiled patches on SGI IRIX with a multiprocess program, you must use static patches. For example, if you link a static patch space into a program and run the program under TotalView's control, TotalView should let you debug it. If you attach to a previously started MPI job, however, even static patches will not let the program run properly. If TotalView still fails to work properly with the static patch space, then you probably cannot use compiled patches with your program.

For general instructions on using patch space allocation controls with compiled expressions, see "*Allocating Patch Space for Compiled Expressions*" in Chapter 14 of the *TotalView Users Guide*.

# Architectures 10

This chapter describes the architectures TotalView supports, including:


- "AMD *x86-64*" on page 239
- "HP A*lpha*" on page 243
- "HP PA-RISC" on page 245
- "IBM P*ower*" on page 247
- "I*ntel* IA-64" on page 251
- "I*ntel x*86" on page 254 (Intel 80386, 80486 and Pentium processors)
- "SGI MIPS" on page 258
- "S*un* SPARC" on page 262


## AMD x86-64

This section contains the following information:


- "AMD *x86-64 General Registers*" on page 240
- "AMD *x86-64 Floating-Point Registers*" on page 240
- "AMD *x86-64* FPCR *Register*" on page 241
- "AMD *x86-64* FPSR *Register*" on page 242
- "AMD *x86-64* MXSCR *Register*" on page 242


The x86-64 can be programmed in either 32- or 64-bit mode. TotalView supports both. In 32-bit mode, the processor is identical to an x86, and the stack frame is identical to the x86. The information within this section describes 64-bit mode.

*The* AMD *x86-64 processor supports the* IEEE *floating-point format*.

## AMD x86-64 General Registers

TotalView displays the AMD x86-64 general registers in the Stack Frame Pane of the Process Window. The following table describes how TotalView treats each general register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| RAX | General registers | <long> | yes | yes | $rax |
| RDX | | <long> | yes | yes | $rdx |
| RCX | | <long> | yes | yes | $rcx |
| RBX | | <long> | yes | yes | $rbx |
| RSI | | <long> | yes | yes | $rsi |
| RDI | | <long> | yes | yes | $rdi |
| RBP | | <long> | yes | yes | $rbp |
| RSP | | <long> | yes | yes | $rsp |
| R8-R15 | | <long> | yes | yes | $r8-$r15 |
| RA | Selector registers | <int> | no | no | $ra |
| SS | | <int> | no | no | $ss |
| DS | | <int> | no | no | $ds |
| ES | | <int> | no | no | $es |
| FS | | <int> | no | no | $fs |
| GS | | <int> | no | no | $gs |
| EFLAGS | | <int> | no | no | $eflags |
| RIP | Instruction pointer | <code>[] | no | yes | $eip |
| FS_BASE | | <long> | yes | yes | $fs_base |
| GS_BASE | | <long> | yes | yes | $gs_base |
| TEMP | | <long> | no | no | $temp |

## AMD x86-64 Floating-Point Registers

TotalView displays the x86-64 floating-point registers in the Stack Frame Pane of the Process Window. The next table describes how TotalView treats each floating-point register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| ST0 | ST(0) | <extended> | yes | yes | $st0 |
| ST1 | ST(1) | <extended> | yes | yes | $st1 |
| ST2 | ST(2) | <extended> | yes | yes | $st2 |
| ST3 | ST(3) | <extended> | yes | yes | $st3 |
| ST4 | ST(4) | <extended> | yes | yes | $st4 |
| ST5 | ST(5) | <extended> | yes | yes | $st5 |
| ST6 | ST(6) | <extended> | yes | yes | $st6 |
| ST7 | ST(7) | <extended> | yes | yes | $st7 |
| FPCR | Floating-point control register | <int> | yes | no | $fpcr |
| FPSR | Floating-point status register | <int> | no | no | $fpsr |

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| FPTAG | Tag word | <int> | no | no | $fptag |
| FPOP | Floating-point operation | <int> | no | no | $fpop |
| FPI | Instruction address | <int> | no | no | $fpi |
| FPD | Data address | <int> | no | no | $fpd |
| MXCSR | SSE status and control | <int> | yes | no | $mxcsv |
| MXCSR_ MASK | MXCSR mask | <int> | no | no | $mxcsr_ mask |
| XMM0_L ... XMM7_L | Streaming SIMD Extension: left half | <long> | yes | yes | $xmm0_l ... $xmm7_l |
| XMM0_H ... XMM7_H | Streaming SIMD Extension: right half | <long> | yes | yes | $xmm0_h ... $xmm7_h |
| XMM8_L ... XMM15_L | Streaming SIMD Extension: left half | <long> | yes | yes | $xmm8_l ... $xmm15_l |
| XMM8_H ... XMM15_H | Streaming SIMD Extension: right half | <long> | yes | yes | $xmm8_h ... $xmm15_h |

*The x86-64 has 16128-bit registers that are used by SSE and SSE2 instructions. TotalView displays these as 32 64-bit registers. These registers can be used in the following ways: 16 bytes, 8 words, 2 longs, 4 floating point, 2 double, or a single 128-bit value. TotalView shows each of these hardware registers as two <long> registers. To change the type, dive and then edit the type in the data window to be an array of the type you wish. For example, cast it to "<char>[16]", "<float>[4], and so on.*

## AMD x86-64 FPCR Register

For your convenience, TotalView interprets the bit settings of the FPCR and FPSR registers.

You can edit the value of the FPCR and set it to any of the bit settings outlined in the next table.

| Value | Bit Setting | Meaning |
|---|---|---|
| RC=RN | 0x0000 | To nearest rounding mode |
| RC=R- | 0x2000 | Toward negative infinity rounding mode |
| RC=R+ | 0x4000 | Toward positive infinity rounding mode |
| RC=RZ | 0x6000 | Toward zero rounding mode |
| PC=SGL | 0x0000 | Single-precision rounding |
| PC=DBL | 0x0080 | Double-precision rounding |
| PC=EXT | 0x00c0 | Extended-precision rounding |
| EM=PM | 0x0020 | Precision exception enable |
| EM=UM | 0x0010 | Underflow exception enable |
| EM=OM | 0x0008 | Overflow exception enable |
| EM=ZM | 0x0004 | Zero-divide exception enable |

| Value | Bit Setting | Meaning |
|---|---|---|
| EM=DM | 0x0002 | Denormalized operand exception enable |
| EM=IM | 0x0001 | Invalid operation exception enable |

### Using the AMD x86-64 FPCR Register

You can change the value of the FPCR within TotalView to customize the exception handling for your program.

For example, if your program inadvertently divides by zero, you can edit the bit setting of the FPCR register in the Stack Frame Pane. In this case, you would change the bit setting for the FPCR to include **0x0004** (as shown in Table 26) so that TotalView traps the "divide-by-zero" bit. The string displayed next to the FPCR register should now include **EM=(ZM).** Now, when your program divides by zero, it receives a **SIGFPE** signal, which you can catch with TotalView. See "*Handling Signals*" in Chapter 3 of the *TotalView Users Guide* for information on handling signals. If you did not set the bit for trapping divide by zero, the processor would ignore the error and set the **EF=(ZE)** bit in the FPSR.

## AMD x86-64 FPSR Register

The bit settings of the AMD x86-64 FPSR register are outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| TOP=<*i*> | 0x3800 | Register <*i*> is top of FPU stack |
| B | 0x8000 | FPU busy |
| C0 | 0x0100 | Condition bit 0 |
| C1 | 0x0200 | Condition bit 1 |
| C2 | 0x0400 | Condition bit 2 |
| C3 | 0x4000 | Condition bit 3 |
| ES | 0x0080 | Exception summary status |
| SF | 0x0040 | Stack fault |
| EF=PE | 0x0020 | Precision exception |
| EF=UE | 0x0010 | Underflow exception |
| EF=OE | 0x0008 | Overflow exception |
| EF=ZE | 0x0004 | Zero divide exception |
| EF=DE | 0x0002 | Denormalized operand exception |
| EF=IE | 0x0001 | Invalid operation exception |

## AMD x86-64 MXSCR Register

This register contains control and status information for the SSE registers. Some of the bits in this register are editable. You cannot dive in these values.

The bit settings of the AMD x86-64 MXCSR register are outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| FZ | 0x8000 | Flush to zero |
| RC=RN | 0x0000 | To nearest rounding mode |

| Value | Bit Setting | Meaning |
|---|---|---|
| RC=R- | 0x2000 | Toward negative infinity rounding mode |
| RC=R+ | 0x4000 | Toward positive infinity rounding mode |
| RC=RZ | 0x6000 | Toward zero rounding mode |
| EM=PM | 0x1000 | Precision mask |
| EM=UM | 0x0800 | Underflow mask |
| EM=OM | 0x0400 | Overflow mask |
| EM=ZM | 0x0200 | Divide-by-zero mask |
| EM=DM | 0x0100 | Denormal mask |
| EM=IM | 0x0080 | Invalid operation mask |
| DAZ | 0x0040 | Denormals are zeros |
| EF=PE | 0x0020 | Precision flag |
| EF=UE | 0x0010 | Underflow flag |
| EF=OE | 0x0008 | Overflow flag |
| EF=ZE | 0x0004 | Divide-by-zero flag |
| EF=DE | 0x0002 | Denormal flag |
| EF=IE | 0x0001 | Invalid operation flag |



# HP Alpha

This section contains the following information:

- Alpha General Registers
- Alpha Floating-Point Registers
- Alpha FPCR Register

*The Alpha processor supports the* IEEE *floating-point format.*

## Alpha General Registers

TotalView displays the Alpha general registers in the Stack Frame Pane of the Process Window. The next table describes how TotalView treats each general register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| V0 | Function value register | <long> | yes | yes | $v0 |
| T0 – T7 | Conventional scratch registers | <long> | yes | yes | $t0 – $t7 |
| S0 – S5 | Conventional saved registers | <long> | yes | yes | $s0 – $s5 |
| S6 | Stack frame base register | <long> | yes | yes | $s6 |
| A0 – A5 | Argument registers | <long> | yes | yes | $a0 – $a5 |
| T8 – T11 | Conventional scratch registers | <long> | yes | yes | $t8 – $t11 |
| RA | Return Address register | <long> | yes | yes | $ra |
| T12 | Procedure value register | <long> | yes | yes | $t12 |
| AT | Volatile scratch register | <long> | yes | yes | $at |

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| GP | Global pointer register | <long> | yes | yes | $gp |
| SP | Stack pointer | <long> | yes | yes | $sp |
| ZERO | ReadAsZero/Sink register | <long> | no | yes | $zero |
| PC | Program counter | <code>[] | no | yes | $pc |
| FP | Frame pointer. The Frame Pointer is a software register that TotalView maintains; it is not an actual hardware register. TotalView computes the value of FP as part of the stack backtrace. | <long> | no | yes | $fp |

## Alpha Floating-Point Registers

TotalView displays the Alpha floating-point registers in the Stack Frame Pane of the Process Window. Here is a table that describes how TotalView treats each floating-point register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| F0 – F1 | Floating-point registers (*f* registers), used singly | <double> | yes | yes | $f0 – $f1 |
| F2 – F9 | Conventional saved registers | <double> | yes | yes | $f2 – $f9 |
| F10 – F15 | Conventional scratch registers | <double> | yes | yes | $f10 – $f15 |
| F16 – F21 | Argument registers | <double> | yes | yes | $f16 – $f21 |
| F22 – F30 | Conventional scratch registers | <double> | yes | yes | $f22 – $f30 |
| F31 | ReadAsZero/Sink register | <double> | yes | yes | $f31 |
| FPCR | Floating-point control register | <long> | yes | no | $fpcr |

## Alpha FPCR Register

For your convenience, TotalView interprets the bit settings of the Alpha FPCR register. You can edit the value of the FPCR and set it to any of the bit settings outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| SUM | 0x8000000000000000 | Summary bit |
| DYN=CHOP | 0x0000000000000000 | Rounding mode — Chopped rounding mode |
| DYN=MINF | 0x0400000000000000 | Rounding mode — Negative infinity |
| DYN=NORM | 0x0800000000000000 | Rounding mode — Normal rounding |
| DYN=PINF | 0x0c00000000000000 | Rounding mode — Positive infinity |
| IOV | 0x0200000000000000 | Integer overflow |
| INE | 0x0100000000000000 | Inexact result |
| UNF | 0x0080000000000000 | Underflow |

| Value | Bit Setting | Meaning |
|---|---|---|
| OVF | 0x0040000000000000 | Overflow |
| DZE | 0x0020000000000000 | Division by zero |
| INV | 0x0010000000000000 | Invalid operation |

# HP PA-RISC

This section contains the following information:

- PA-RISC General Registers
- PA-RISC Process Status Word
- PA-RISC Floating-Point Registers
- PA-RISC Floating-Point Format

## PA-RISC General Registers

TotalView displays the PA-RISC general registers in the Stack Frame Pane of the Process Window. The following table describes how TotalView treats each general register and the actions you take with them.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| r0 | Always contains zero | <long> | no | no | $r0 |
| r1-r31 | General registers | <long> | yes | yes | $r1-$r31 |
| pc | Current instruction pointer | <long> | yes | yes | $pc |
| nxtpc | Next instruction pointer | <long> | yes | yes | $nxtpc |
| pcs | Current instruction space | <long> | no | no | $pcs |
| nxtpcs | Next instruction space | <long> | no | no | $nxtpcs |
| psw | Processor status word | <long> | yes | no | $psw |
| sar | Shift amount register | <long> | yes | no | $sar |
| sr0-sr7 | Space registers | <long> | no | no | $sr0-$sr7 |
| recov | Recovery counter | <long> | no | no | $recov |
| pid1-pid8 | Protection IDs | <long> | no | no | $pid1-$pid8 |
| ccr | Coprocessor configuration | <long> | no | no | $ccr |
| scr | SFU configuration register | <long> | no | no | $scr |
| eiem | External interrupt enable mask | <long> | no | no | $eiem |
| iir | Interrupt instruction | <long> | no | no | $iir |
| isr | Interrupt space | <long> | no | no | $isr |
| ior | Interrupt offset | <long> | no | no | $ior |
| cr24-cr26 | Temporary registers | <long> | no | no | $cr24-$cr26 |
| tp | Thread pointer | <long> | yes | yes | $tp |

## PA-RISC Process Status Word

For your convenience, TotalView interprets the bit settings of the PA-RISC Processor Status Word. You can edit the value of this word and set some of the bits listed in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| W | 0x0000000008000000 | 64-bit addressing enable |
| E | 0x0000000004000000 | Little-endian enable |
| S | 0x0000000002000000 | Secure interval timer |
| T | 0x0000000001000000 | Taken branch flag |
| H | 0x0000000000800000 | Higher-privilege transfer trap enable |
| L | 0x0000000000400000 | Lower-privilege transfer trap enable |
| N | 0x0000000000200000 | Nullify current instruction |
| X | 0x0000000000100000 | Data memory break disable |
| B | 0x0000000000080000 | Taken branch flag |
| C | 0x0000000000040000 | Code address translation enable |
| V | 0x0000000000020000 | Divide step correction |
| M | 0x0000000000010000 | High-priority machine check mask |
| O | 0x0000000000000080 | Ordered references |
| F | 0x0000000000000020 | Performance monitor interrupt unmask |
| R | 0x0000000000000010 | Recovery counter enable |
| Q | 0x0000000000000008 | Interrupt state collection enable |
| P | 0x0000000000000004 | Protection identifier validation enable |
| D | 0x0000000000000002 | Data address translation enable |
| I | 0x0000000000000001 | External interrupt unmask |
| C/B | 0x000000FF0000FF00 | Carry/borrow bits |

## PA-RISC Floating-Point Registers

The PA-RISC has 32 floating-point registers. The first four are used for status and exception registers. The rest can be addressed as 64-bit doubles, as two 32-bit floats in the right and left sides of the register, or even-odd pairs of registers as 128-bit extended floats.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| status | Status register | <int> | no | no | $status |
| er1-er7 | Exception registers | <int> | no | no | $er1-$er7 |
| fr4-fr31 | Double floating-point registers | <double> | yes | yes | $fr4-$fr31 |
| fr4l-fr31l | Left half floating-point registers | <float> | yes | yes | $fr4l-$fr31l |
| fr4r-fr31r | Right half floating-point registers | <float> | yes | yes | $fr4r-$fr31r |
| fr4/fr5-fr30/fr31 | Extended floating-point register pairs | <extended> | yes | yes | $fr4_fr5-$fr30_fr31 |

The floating-point status word controls the arithmetic rounding mode, enables user-level traps, enables floating-point exceptions, and indicates the results of comparisons.

| Type | Value | Meaning |
|---|---|---|
| Rounding Mode | 0 | Round to nearest |
| | 1 | Round toward zero |

| Type | Value | Meaning |
|---|---|---|
| | 2 | Round toward +infinity |
| | 3 | Round toward –infinity |
| Exception Enable and Exception Flag Bits | V | Invalid operation |
| | Z | Division by zero |
| | O | Overflow |
| | U | Underflow |
| | I | Inexact result |
| Comparison Fields | C | Compare bit; contains the result of the most recent queued compare instruction. |
| | CQ | Compare queue; contains the result of the second-most recent queued compare through the twelfth-most recent queued compare. Each queued compare instruction shifts the CQ field right one bit and copies the C bit into the left-most position.<br>This field occupies the same bits as the CA field and is undefined after a targeted compare. |
| | CA | Compare array; an array of seven compare bits, each of which contains the result of the most recent compare instruction targeting that bit.<br>This field occupies the same bits as the CQ field and is undefined after a queued compare. |
| Other Flags | T | Delayed trap |
| | D | Denormalized as zero |



### PA-RISC Floating-Point Format

The PA-RISC processor supports the IEEE floating-point format.

## IBM Power

This section contains the following information:

- Power General Registers
- Power MSR Register
- Power Floating-Point Registers
- Power FPSCR Register
- Using the Power FPSCR Register

*The Power architecture supports the* IEEE *floating-point format*.

### Power General Registers

TotalView displays Power general registers in the Stack Frame Pane of the Process Window. The following table describes how TotalView treats each general register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| R0 | General register 0 | <int> | yes | yes | $r0 |
| SP | Stack pointer | <int> | yes | yes | $sp |
| RTOC | TOC pointer | <int> | yes | yes | $rtoc |
| R3 – R31 | General registers 3 – 31 | <int> | yes | yes | $r3 – $r31 |
| INUM | | <int> | yes | no | $inum |
| PC | Program counter | <code>[] | no | yes | $pc |
| SRR1 | Machine status save/ restore register | <int> | yes | no | $srr1 |
| LR | Link register | <int> | yes | no | $lr |
| CTR | Counter register | <int> | yes | no | $ctr |
| CR | Condition register | <int> | yes | no | $cr |
| XER | Integer exception register | <int> | yes | no | $xer |
| DAR | Data address register | <int> | yes | no | $dar |
| MQ | MQ register | <int> | yes | no | $mq |
| MSR | Machine state register | <int> | yes | no | $msr |
| SEG0 – SEG9 | Segment registers 0 – 9 | <int> | yes | no | $seg0 – $seg9 |
| SG10 – SG15 | Segment registers 10 –15 | <int> | yes | no | $sg10 – $sg15 |
| SCNT | SS_COUNT | <int> | yes | no | $scnt |
| SAD1 | SS_ADDR 1 | <int> | yes | no | $sad1 |
| SAD2 | SS_ADDR 2 | <int> | yes | no | $sad2 |
| SCD1 | SS_CODE 1 | <int> | yes | no | $scd1 |
| SCD2 | SS_CODE 2 | <int> | yes | no | $scd2 |
| TID | | <int> | yes | no | |

## Power MSR Register

For your convenience, TotalView interprets the bit settings of the Power MSR register. You can edit the value of the MSR and set it to any of the bit settings outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| 0x80000000000000000 | SF | Sixty-four bit mode |
| 0x0000000000040000 | POW | Power management enable |
| 0x0000000000020000 | TGPR | Temporary GPR mapping |
| 0x0000000000010000 | ILE | Exception little-endian mode |
| 0x0000000000008000 | EE | External interrupt enable |
| 0x0000000000004000 | PR | Privilege level |
| 0x0000000000002000 | FP | Floating-point available |
| 0x0000000000001000 | ME | Machine check enable |
| 0x0000000000000800 | FE0 | Floating-point exception mode 0 |
| 0x0000000000000400 | SE | Single-step trace enable |
| 0x0000000000000200 | BE | Branch trace enable |

| Value | Bit Setting | Meaning |
|---|---|---|
| 0x0000000000000100 | FE1 | Floating-point exception mode 1 |
| 0x0000000000000040 | IP | Exception prefix |
| 0x0000000000000020 | IR | Instruction address translation |
| 0x0000000000000010 | DR | Data address translation |
| 0x0000000000000002 | RI | Recoverable exception |
| 0x0000000000000001 | LE | Little-endian mode enable |

## Power Floating-Point Registers

TotalView displays the Power floating-point registers in the Stack Frame Pane of the Process Window. The next table describes how TotalView treats each floating-point register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| F0 – F31 | Floating-point registers 0 – 31 | <double> | yes | yes | $f0 – $f31 |
| FPSCR | Floating-point status register | <int> | yes | no | $fpscr |
| FPSCR2 | Floating-point status register 2 | <int> | yes | no | $fpscr2 |

## Power FPSCR Register

For your convenience, TotalView interprets the bit settings of the Power FPSCR register. You can edit the value of the FPSCR and set it to any of the bit settings outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| 0x80000000 | FX | Floating-point exception summary |
| 0x40000000 | FEX | Floating-point enabled exception summary |
| 0x20000000 | VX | Floating-point invalid operation exception summary |
| 0x10000000 | OX | Floating-point overflow exception |
| 0x08000000 | UX | Floating-point underflow exception |
| 0x04000000 | ZX | Floating-point zero divide exception |
| 0x02000000 | XX | Floating-point inexact exception |
| 0x01000000 | VXSNAN | Floating-point invalid operation exception for SNaN |
| 0x00800000 | VXISI | Floating-point invalid operation exception: ∞ – ∞ |
| 0x00400000 | VXIDI | Floating-point invalid operation exception: ∞ / ∞ |
| 0x00200000 | VXZDZ | Floating-point invalid operation exception: 0 / 0 |
| 0x00100000 | VXIMZ | Floating-point invalid operation exception: ∞ * ∞ |
| 0x00080000 | VXVC | Floating-point invalid operation exception: invalid compare |
| 0x00040000 | FR | Floating-point fraction rounded |

| Value | Bit Setting | Meaning |
|---|---|---|
| 0x00020000 | FI | Floating-point fraction inexact |
| 0x00010000 | FPRF=(C) | Floating-point result class descriptor |
| 0x00008000 | FPRF=(L) | Floating-point less than or negative |
| 0x00004000 | FPRF=(G) | Floating-point greater than or positive |
| 0x00002000 | FPRF=(E) | Floating-point equal or zero |
| 0x00001000 | FPRF=(U) | Floating-point unordered or NaN |
| 0x00011000 | FPRF=(QNAN) | Quiet NaN; alias for FPRF=(C+U) |
| 0x00009000 | FPRF=(-INF) | -Infinity; alias for FPRF=(L+U) |
| 0x00008000 | FPRF=(-NORM) | -Normalized number; alias for FPRF=(L) |
| 0x00018000 | FPRF=(-DENORM) | -Denormalized number; alias for FPRF=(C+L) |
| 0x00012000 | FPRF=(-ZERO) | -Zero; alias for FPRF=(C+E) |
| 0x00002000 | FPRF=(+ZERO) | +Zero; alias for FPRF=(E) |
| 0x00014000 | FPRF=(+DENORM) | +Denormalized number; alias for FPRF=(C+G) |
| 0x00004000 | FPRF=(+NORM) | +Normalized number; alias for FPRF=(G) |
| 0x00005000 | FPRF=(+INF) | +Infinity; alias for FPRF=(G+U) |
| 0x00000400 | VXSOFT | Floating-point invalid operation exception: software request |
| 0x00000200 | VXSQRT | Floating-point invalid operation exception: square root |
| 0x00000100 | VXCVI | Floating-point invalid operation exception: invalid integer convert |
| 0x00000080 | VE | Floating-point invalid operation exception enable |
| 0x00000040 | OE | Floating-point overflow exception enable |
| 0x00000020 | UE | Floating-point underflow exception enable |
| 0x00000010 | ZE | Floating-point zero divide exception enable |
| 0x00000008 | XE | Floating-point inexact exception enable |
| 0x00000004 | NI | Floating-point non-IEEE mode enable |
| 0x00000000 | RN=NEAR | Round to nearest |
| 0x00000001 | RN=ZERO | Round toward zero |
| 0x00000002 | RN=PINF | Round toward +infinity |
| 0x00000003 | RN=NINF | Round toward –infinity |

## Using the Power FPSCR Register

On AIX, if you compile your program to catch floating-point exceptions (IBM compiler **–qfltrap** option), you can change the value of the FPSCR within TotalView to customize the exception handling for your program.

For example, if your program inadvertently divides by zero, you can edit the bit setting of the FPSCR register in the Stack Frame Pane. In this case, you would change the bit setting for the FPSCR to include **0x10** (as shown in Table 23) so that TotalView traps the "divide by zero" exception. The string displayed next to the FPSR register should now include **ZE**. Now, when your program divides by zero, it receives a **SIGTRAP** signal, which will be caught

by TotalView. See "*Handling Signals*" in Chapter 3 of the *TotalView Users Guide* for more information. If you did not set the bit for trapping divide by zero or you did not compile to catch floating-point exceptions, your program would not stop and the processor would set the ZX bit.

# Intel IA-64

This section contains the following information:


- Intel IA-64 General Registers
- "IA-64 *Processor Status Register Fields* (PSR)" on page 252
- "*Current Frame Marker Register Fields* (CFM)" on page 253
- "*Register Stack Configuration Register Fields* (RSC)" on page 253
- "*Previous Function State Register Fields* (PFS)" on page 253
- "*Floating Point Registers*" on page 253
- "*Floating Point Status Register Fields*" on page 254


## Intel IA-64 General Registers

TotalView displays the IA-64 general registers in the Stack Frame Pane of the Process Window. The following table describes how TotalView treats each general register, and the actions you can take with each.

*The descriptions in this section are taken (almost verbatim) from the "Intel Itanium Architecture Software Developer's Manual. Volume 1: Application Architecture". This was revision 2.0, printed in December 2001.*

| Register | Description | Data Type | Edit | Dive | in expression |
|---|---|---|---|---|---|
| r0 | register 0 | <long> | N | Y | $r0 |
| r1 | global pointer | <long> | N | Y | $r1 |
| r2-r31 | static general registers | <long> | Y | Y | $r2-$r31 |
| r31-r127 | stacked general registers (all may not be valid) | <long> | Y | Y | $r32-$r127 |
| b0-b7 | branch registers | <code>[] | Y | Y | $b0-$b7 |
| ip | instruction pointer | <code>[] | N | Y | $ip |
| cfm | current frame marker | <long> | Y | Y | $cfm |
| psr | processor status register | <long> | Y | Y | $psr |
| rsc | register stack configuration register (AR 16) | <long> | Y (N on HP-UX) | Y | $rsc |
| bsp | rse backing store pointer (AR 17) | <long> | Y | Y | $bsp |
| bspstore | rse backing store pointer for memory stores (AR 18) | <long> | N | Y | $bspstore |
| rnat | rse NAT collection register (AR 19) | <long> | Y | Y | $rnat |
| ccv | compare and exchange value register (AR 32) | <long> | Y | Y | $ccv |

| Register | Description | Data Type | Edit | Dive | in expression |
|---|---|---|---|---|---|
| unat | user NAT collection register (AR 36) | <long> | Y | Y | $unat |
| fpsr | floating point status register (AR 40) | <long> | Y | Y | $fpsr |
| pfs | previous function state (AR 64) | <long> | Y | Y | $pfs |
| lc | loop count register (AR 65) | <long> | Y | Y | $lc |
| ec | epilog count register (AR 66) | <long> | Y | Y | $ec |
| pr | predication registers (packed) | <long> | Y | Y | $pr |
| nat | nat registers (packed) | <long> | Y | Y | $nat |

*All general registers r32-r127 may not be valid in a given stack frame.*

## IA-64 Processor Status Register Fields (PSR)

These fields control memory access alignment, byte-ordering, and user-configured performance monitors. It also records the modification state of floating-point registers.

| Bit | Field | Meaning |
|---|---|---|
| 1 | be | big-endian enable |
| 2 | up | user performance monitor enable |
| 3 | ac | alignment check |
| 4 | mfl | lower (f2-f31) floating point registers written |
| 5 | mfh | upper (f32-f127) floating point registers written |
| 13 | ic | interruption collection |
| 14 | i | interrupt bit |
| 15 | pk | protection key enable |
| 17 | dt | data address translation |
| 18 | dfl | disabled lower floating point register set |
| 19 | dfh | disabled upper floating point register set |
| 20 | sp | secure performance monitors |
| 21 | pp | privileged performance monitor enable |
| 22 | di | disable instruction set transition |
| 23 | si | secure interval timer |
| 24 | db | debug breakpoint fault |
| 25 | lp | lower privilege transfer trap |
| 26 | tb | taken branch trap |
| 27 | rt | register stack translation |
| 33:32 | cpl | current privilege level |
| 34 | is | instruction set |
| 35 | mc | machine check abort mask |
| 36 | it | instruction address translation |

| Bit | Field | Meaning |
|---|---|---|
| 37 | id | instruction debug fault disable |
| 38 | da | disable data access and dirty-bit faults |
| 39 | dd | data debug fault disable |
| 40 | ss | single step enable |
| 42:41 | ri | restart instruction |
| 43 | ed | exception deferral |
| 44 | bn | register bank |
| 45 | ia | disable instruction access-bit faults |

## Current Frame Marker Register Fields (CFM)

Each general register stack frame is associated with a frame marker. The frame maker describes the state of the general register stack. The Current Frame Marker (CFM) holds the state of the current stack frame.

| Bit Range | Field | Meaning |
|---|---|---|
| 6:0 | sof | Size of frame |
| 13:7 | sol | Size of locals portion of stack frame |
| 17:14 | sor | Size of rotating portion of stack frame (number of rotating registers is sor*8 |
| 24:18 | rrb.gr | Register rename base for general registers |
| 31:25 | rrb.fr | Register rename base for float registers |
| 37:32 | rrb.pr | Register rename base for predicate registers |

## Register Stack Configuration Register Fields (RSC)

The Register Stack Configuration (RSC) Register is a 64-bit register used to control the operation of the Register Stack Engine (RSE).

| Bit Range | Field | Meaning |
|---|---|---|
| 1:0 00 | mode | enforced lazy |
| 1:0 01 | | load intensive |
| 1:0 10 | | store intensive |
| 1:0 11 | | eager |
| 3:2 | pl | RSE privilege level |
| 4 | be | RSE endian mode (0=little endian, 1=big endian) |
| 29:16 | loadrs | RSE load distance to tear point |

## Previous Function State Register Fields (PFS)

The Previous Function State register (PFS) contains multiple fields: Previous Frame Marker (pfm), Previous Epilog Count (pec), and Previous Privilege Level (ppl). These values are copied automatically on a call from the CFM register, Epilog Count Register (EC), and PSR.cpl (Current Privilege Level in the Processor Status Register) to accelerate procedure calling.

| Value | Bit Setting | Meaning |
|---|---|---|
| 37:0 | pfm | previous frame marker |
| 57:52 | pec | previous epilog count |
| 63:62 | ppl | previous privilege level |

## Floating Point Registers

The IA-64 contains 128 floating-point registers. The first two are read only.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| f0 | float register 0 | <long> | N | Y | $f0 |
| f1 | float register 1 | <long> | N | Y | $f1 |
| f2-f31 | lower float registers | <long> | Y | Y | $f2-$f31 |
| f32-f127 | upper float registers | <long> | Y | Y | $f32-$f127 |

## Floating Point Status Register Fields

The Floating-Point Status Register (FPSR) contains the dynamic control and status information for floating-point operations. There is one main set of control and status information and three alternate sets.

| Field | Bits | Meaning |
|---|---|---|
| traps.vd | 0 | Invalid Operation Floating-Point Exception fault disabled |
| traps.dd | 1 | Denormal/Unnormal Operating Floating-Point Exception fault disabled |
| traps.zd | 2 | Zero Divide Floating-Point Exception trap disabled |
| traps.od | 3 | Overflow Floating-Point Exception trap disabled |
| traps.ud | 4 | Underflow Floating-Point Exception trap disabled |
| traps.id | 5 | Inexact Floating-Point Exception trap disabled |
| sfo | 18:6 | main status field |
| sf1 | 31:19 | alternate status field 1 |
| sf2 | 44:32 | alternate status field 2 |
| sf3 | 57:45 | alternate status field 3 |

Here is a description of the FPSR status field descriptions.

| Bits | Field | meaning |
|---|---|---|
| 0 | ftz | flush-to-zero mode |
| 1 | wre | widest range exponent |
| 3:2 | pc | precision control |
| 5:4 | rc | rounding control |
| 6 | td | traps disabled |
| 7 | v | invalid operation |
| 8 | d | denormal/unnormal operand |
| 9 | z | zero divide |
| 10 | o | overflow |
| 11 | u | underflow |
| 12 | i | inexact |

# Intel x86

This section contains the following information:


- "*Intel x86 General Registers*" on page 255
- "*Intel x86 Floating-Point Registers*" on page 255
- "*Intel x86 FPCR Register*" on page 256
- "*Intel x86 FPSR Register*" on page 257

■ "*Intel x86 MXSCR Register*" on page 257

*The Intel x86 processor supports the* IEEE *floating-point format*.

## Intel x86 General Registers

TotalView displays the Intel x86 general registers in the Stack Frame Pane of the Process Window. The following table describes how TotalView treats each general register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| EAX | General registers | <long> | yes | yes | $eax |
| ECX | | <long> | yes | yes | $ecx |
| EDX | | <long> | yes | yes | $edx |
| EBX | | <long> | yes | yes | $ebx |
| EBP | | <long> | yes | yes | $ebp |
| ESP | | <long> | yes | yes | $esp |
| ESI | | <long> | yes | yes | $esi |
| EDI | | <long> | yes | yes | $edi |
| CS | Selector registers | <int> | no | no | $cs |
| SS | | <int> | no | no | $ss |
| DS | | <int> | no | no | $ds |
| ES | | <int> | no | no | $es |
| FS | | <int> | no | no | $fs |
| GS | | <int> | no | no | $gs |
| EFLAGS | | <int> | no | no | $eflags |
| EIP | Instruction pointer | <code>[] | no | yes | $eip |
| FAULT | | <long> | no | no | $fault |
| TEMP | | <long> | no | no | $temp |
| INUM | | <long> | no | no | $inum |
| ECODE | | <long> | no | no | $ecode |

## Intel x86 Floating-Point Registers

TotalView displays the x86 floating-point registers in the Stack Frame Pane of the Process Window. The next table describes how TotalView treats each floating-point register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| ST0 | ST(0) | <extended> | yes | yes | $st0 |
| ST1 | ST(1) | <extended> | yes | yes | $st1 |
| ST2 | ST(2) | <extended> | yes | yes | $st2 |
| ST3 | ST(3) | <extended> | yes | yes | $st3 |
| ST4 | ST(4) | <extended> | yes | yes | $st4 |
| ST5 | ST(5) | <extended> | yes | yes | $st5 |
| ST6 | ST(6) | <extended> | yes | yes | $st6 |
| ST7 | ST(7) | <extended> | yes | yes | $st7 |

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| FPCR | Floating-point control register | <int> | yes | no | $fpcr |
| FPSR | Floating-point status register | <int> | no | no | $fpsr |
| FPTAG | Tag word | <int> | no | no | $fptag |
| FPIOFF | Instruction offset | <int> | no | no | $fpioff |
| FPISEL | Instruction selector | <int> | no | no | $fpisel |
| FPDOFF | Data offset | <int> | no | no | $fpdoff |
| FPDSEL | Data selector | <int> | no | no | $fpdsel |
| MXCSR | SSE status and control | <int> | yes | no | $mxcsv |
| MXCSR_ MASK | MXCSR mask | <int> | no | no | $mxcsr_ mask |
| XMM0_L … XMM7_L | Streaming SIMD Extension: left half | <long long> | yes | yes | $xmm0_l … $xmm7_l |
| XMM0_H … XMM7_H | Streaming SIMD Extension: right half | <long long> | yes | yes | $xmm0_h … $xmm7_h |

*The Pentium III and 4 have 8 128-bit registers that are used by SSE and SSE2 instructions. TotalView displays these as 16 64-bit registers. These registers can be used in the following ways: 16 bytes, 8 words, 2 long longs, 4 floating point, 2 double, or a single 128-bit value. TotalView shows each of these hardware registers as two <long long> registers. To change the type, dive and then edit the type in the data window to be an array of the type you wish. For example, cast it to "<char>[16]", "<float>[4], and so on.*

## Intel x86 FPCR Register

For your convenience, TotalView interprets the bit settings of the FPCR and FPSR registers.

You can edit the value of the FPCR and set it to any of the bit settings outlined in the next table.

| Value | Bit Setting | Meaning |
|---|---|---|
| RC=RN | 0x0000 | To nearest rounding mode |
| RC=R- | 0x2000 | Toward negative infinity rounding mode |
| RC=R+ | 0x4000 | Toward positive infinity rounding mode |
| RC=RZ | 0x6000 | Toward zero rounding mode |
| PC=SGL | 0x0000 | Single-precision rounding |
| PC=DBL | 0x0080 | Double-precision rounding |
| PC=EXT | 0x00c0 | Extended-precision rounding |
| EM=PM | 0x0020 | Precision exception enable |
| EM=UM | 0x0010 | Underflow exception enable |
| EM=OM | 0x0008 | Overflow exception enable |
| EM=ZM | 0x0004 | Zero-divide exception enable |

| Value | Bit Setting | Meaning |
|---|---|---|
| EM=DM | 0x0002 | Denormalized operand exception enable |
| EM=IM | 0x0001 | Invalid operation exception enable |

### Using the Intel x86 FPCR Register

You can change the value of the FPCR within TotalView to customize the exception handling for your program.

For example, if your program inadvertently divides by zero, you can edit the bit setting of the FPCR register in the Stack Frame Pane. In this case, you would change the bit setting for the FPCR to include **0x0004** (as shown in Table 26) so that TotalView traps the "divide-by-zero" bit. The string displayed next to the FPCR register should now include **EM=(ZM).** Now, when your program divides by zero, it receives a **SIGFPE** signal, which you can catch with TotalView. See "*Handling Signals*" in Chapter 3 of the *TotalView Users Guide* for information on handling signals. If you did not set the bit for trapping divide by zero, the processor would ignore the error and set the **EF=(ZE)** bit in the FPSR.

## Intel x86 FPSR Register

The bit settings of the Intel x86 FPSR register are outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| TOP=<*i*> | 0x3800 | Register <*i*> is top of FPU stack |
| B | 0x8000 | FPU busy |
| C0 | 0x0100 | Condition bit 0 |
| C1 | 0x0200 | Condition bit 1 |
| C2 | 0x0400 | Condition bit 2 |
| C3 | 0x4000 | Condition bit 3 |
| ES | 0x0080 | Exception summary status |
| SF | 0x0040 | Stack fault |
| EF=PE | 0x0020 | Precision exception |
| EF=UE | 0x0010 | Underflow exception |
| EF=OE | 0x0008 | Overflow exception |
| EF=ZE | 0x0004 | Zero divide exception |
| EF=DE | 0x0002 | Denormalized operand exception |
| EF=IE | 0x0001 | Invalid operation exception |

## Intel x86 MXSCR Register

This register contains control and status information for the SSE registers. Some of the bits in this register are editable. You cannot dive in these values.

The bit settings of the Intel x86 MXCSR register are outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| FZ | 0x8000 | Flush to zero |
| RC=RN | 0x0000 | To nearest rounding mode |

| Value | Bit Setting | Meaning |
|---|---|---|
| RC=R- | 0x2000 | Toward negative infinity rounding mode |
| RC=R+ | 0x4000 | Toward positive infinity rounding mode |
| RC=RZ | 0x6000 | Toward zero rounding mode |
| EM=PM | 0x1000 | Precision mask |
| EM=UM | 0x0800 | Underflow mask |
| EM=OM | 0x0400 | Overflow mask |
| EM=ZM | 0x0200 | Divide-by-zero mask |
| EM=DM | 0x0100 | Denormal mask |
| EM=IM | 0x0080 | Invalid operation mask |
| DAZ | 0x0040 | Denormals are zeros |
| EF=PE | 0x0020 | Precision flag |
| EF=UE | 0x0010 | Underflow flag |
| EF=OE | 0x0008 | Overflow flag |
| EF=ZE | 0x0004 | Divide-by-zero flag |
| EF=DE | 0x0002 | Denormal flag |
| EF=IE | 0x0001 | Invalid operation flag |

# SGI MIPS

This section contains the following information:

- MIPS General Registers
- MIPS SR Register
- MIPS Floating-Point Registers
- MIPS FCSR Register
- Using the MIPS FCSR Register
- MIPS Delay Slot Instructions

*The* MIPS *processor supports the* IEEE *floating-point format*.

## MIPS General Registers

TotalView displays the MIPS general-purpose registers in the Stack Frame Pane of the Process Window. The following table describes how TotalView treats each general register, and the actions you can take with each register.

Programs compiled with either **–64** or **–n32** have 64-bit registers. TotalView uses **<long>** for **–64** compiled programs and **<long long>** for **–n32** compiled programs.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| ZERO | Always has the value 0 | <long> | no | no | $zero |
| AT | Reserved for the assembler | <long> | yes | yes | $at |
| V0 – V1 | Function value registers | <long> | yes | yes | $v0 – $v1 |
| A0 – A7 | Argument registers | <long> | yes | yes | $a0 – $a7 |
| T0 – T3 | Temporary registers | <long> | yes | yes | $t0 – $t3 |

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| S0 – S7 | Saved registers | <long> | yes | yes | $s0 – $s7 |
| T8 – T9 | Temporary registers | <long> | yes | yes | $t8 – $t9 |
| K0 – K1 | Reserved for the operating system | <long> | yes | yes | $k1 – $k2 |
| GP | Global pointer | <long> | yes | yes | $gp |
| SP | Stack pointer | <long> | yes | yes | $sp |
| S8 | Hardware frame pointer | <long> | yes | yes | $s8 |
| RA | Return address register | <code>[] | no | yes | $ra |
| MDLO | Multiply/Divide special register, holds least-significant bits of multiply, quotient of divide | <long> | yes | yes | $mdlo |
| MDHI | Multiply/Divide special register, holds most-significant bits of multiply, remainder of divide | <long> | yes | yes | $mdhi |
| CAUSE | Cause register | <long> | yes | yes | $cause |
| EPC | Program counter | <code>[] | no | yes | $epc |
| SR | Status register | <long> | no | no | $sr |
| VFP | Virtual frame pointer<br>The virtual frame pointer is a software register that TotalView maintains. It is not an actual hardware register. TotalView computes the VFP as part of stack backtrace. | <long> | no | no | $vfp |

## MIPS SR Register

For your convenience, TotalView interprets the bit settings of the SR register as outlined in the next table.

| Value | Bit Setting | Meaning |
|---|---|---|
| 0x00000001 | IE | Interrupt enable |
| 0x00000002 | EXL | Exception level |
| 0x00000004 | ERL | Error level |
| 0x00000008 | S | Supervisor mode |
| 0x00000010 | U | User mode |
| 0x00000018 | U | Undefined (implemented as User mode) |
| 0x00000000 | K | Kernel mode |
| 0x00000020 | UX | User mode 64-bit addressing |
| 0x00000040 | SX | Supervisor mode 64-bit addressing |
| 0x00000080 | KX | Kernel mode 64-bit addressing |
| 0x0000FF00 | IM=i | Interrupt Mask value is *i* |
| 0x00010000 | DE | Disable cache parity/ECC |
| 0x00020000 | CE | Reserved |
| 0x00040000 | CH | Cache hit |

| Value | Bit Setting | Meaning |
|---|---|---|
| 0x00080000 | NMI | Non-maskable interrupt has occurred |
| 0x00100000 | SR | Soft reset or NMI exception |
| 0x00200000 | TS | TLB shutdown has occurred |
| 0x00400000 | BEV | Bootstrap vectors |
| 0x02000000 | RE | Reverse-Endian bit |
| 0x04000000 | FR | Additional floating-point registers enabled |
| 0x08000000 | RP | Reduced power mode |
| 0x10000000 | CU0 | Coprocessor 0 usable |
| 0x20000000 | CU1 | Coprocessor 1 usable |
| 0x40000000 | CU2 | Coprocessor 2 usable |
| 0x80000000 | XX | MIPS IV instructions usable |

## MIPS Floating-Point Registers

TotalView displays the MIPS floating-point registers in the Stack Frame Pane of the Process Window. Here is a table that describes how TotalView treats each floating-point register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| F0, F2 | Hold results of floating-point type function; $f0 has the real part, $f2 has the imaginary part | <double> | yes | yes | $f0, $f2 |
| F1 – F3, F4 – F11 | Temporary registers | <double> | yes | yes | $f1 – $f3, $f4 – $f11 |
| F12 – F19 | Pass single- or double-precision actual arguments | <double> | yes | yes | $f12 – $f19 |
| F20 – F23 | Temporary registers | <double> | yes | yes | $f20 – $f23 |
| F24 – F31 | Saved registers | <double> | yes | yes | $f24 – $f31 |
| FCSR | FPU control and status register | <int> | yes | no | $fcsr |

## MIPS FCSR Register

For your convenience, TotalView interprets the bit settings of the MIPS FCSR register. You can edit the value of the FCSR and set it to any of the bit settings outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| RM=RN | 0x00000000 | Round to nearest |
| RM=RZ | 0x00000001 | Round toward zero |
| RM=RP | 0x00000002 | Round toward positive infinity |
| RM=RM | 0x00000003 | Round toward negative infinity |
| flags=(I) | 0x00000004 | Flag=inexact result |
| flags=(U) | 0x00000008 | Flag=underflow |
| flags=(O) | 0x00000010 | Flag=overflow |
| flags=(Z) | 0x00000020 | Flag=divide by zero |
| flags=(V) | 0x00000040 | Flag=invalid operation |

| Value | Bit Setting | Meaning |
|---|---|---|
| enables=(I) | 0x00000080 | Enables=inexact result |
| enables=(U) | 0x00000100 | Enables=underflow |
| enables=(O) | 0x00000200 | Enables=overflow |
| enables=(Z) | 0x00000400 | Enables=divide by zero |
| enables=(V) | 0x00000800 | Enables=invalid operation |
| cause=(I) | 0x00001000 | Cause=inexact result |
| cause=(U) | 0x00002000 | Cause=underflow |
| cause=(O) | 0x00004000 | Cause=overflow |
| cause=(Z) | 0x00008000 | Cause=divide by zero |
| cause=(V) | 0x00010000 | Cause=invalid operation |
| cause=(E) | 0x00020000 | Cause=unimplemented |
| FCC=(0/c) | 0x00800000 | FCC=Floating-Point Condition Code 0; c=Condition bit |
| FS | 0x01000000 | Flush to zero |
| FCC=(1) | 0x02000000 | FCC=Floating-Point Condition Code 1 |
| FCC=(2) | 0x04000000 | FCC=Floating-Point Condition Code 2 |
| FCC=(3) | 0x08000000 | FCC=Floating-Point Condition Code 3 |
| FCC=(4) | 0x10000000 | FCC=Floating-Point Condition Code 4 |
| FCC=(5) | 0x20000000 | FCC=Floating-Point Condition Code 5 |
| FCC=(6) | 0x40000000 | FCC=Floating-Point Condition Code 6 |
| FCC=(7) | 0x80000000 | FCC=Floating-Point Condition Code 7 |

### Using the MIPS FCSR Register

You can change the value of the MIPS FCSR register within TotalView to customize the exception handling for your program.

For example, if your program inadvertently divides by zero, you can edit the bit setting of the FCSR register in the Stack Frame Pane. In this case, you would change the bit setting for the FCSR to include **0x400** (as shown in Table 31). The string displayed next to the FCSR register should now include **enables=(Z)**. Now, when your program divides by zero, it receives a **SIGFPE** signal, which you can catch with TotalView. See "*Setting Up a Debugging Session*" in the *TotalView Users Guide* for more information.

## MIPS Delay Slot Instructions

On the MIPS architecture, jump and branch instructions have a "delay slot". This means that the instruction after the jump or branch instruction is executed before the jump or branch is executed.

In addition, there is a group of "branch likely" conditional branch instructions in which the instruction in the delay slot is executed only if the branch is taken.

The MIPS processors execute the jump or branch instruction and the delay slot instruction as an indivisible unit. If an exception occurs as a result of executing the delay slot instruction, the branch or jump instruction is not executed, and the exception appears to have been caused by the jump or branch instruction.

This behavior of the MIPS processors affects both the TotalView instruction step command and TotalView breakpoints.

The TotalView instruction step command will step both the jump or branch instruction and the delay slot instruction as if they were a single instruction.

If a breakpoint is placed on a delay slot instruction, execution will stop at the jump or branch preceding the delay slot instruction, and TotalView will not know that it is at a breakpoint. At this point, attempting to continue the thread that hit the breakpoint without first removing the breakpoint will cause the thread to hit the breakpoint again without executing any instructions. Before continuing the thread, you must remove the breakpoint. If you need to reestablish the breakpoint, you might then use the instruction step command to execute just the delay slot instruction and the branch.

A breakpoint placed on a delay slot instruction of a *branch likely* instruction will be hit only if the branch is going to be taken.

# Sun SPARC

This section has the following information:

- SPARC General Registers
- SPARC PSR Register
- SPARC Floating-Point Registers
- SPARC FPSR Register
- Using the SPARC FPSR Register

*The* SPARC *processor supports the* IEEE *floating-point format.*

## SPARC General Registers

TotalView displays the SPARC general registers in the Stack Frame Pane of the Process Window. The following table describes how TotalView treats each general register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| G0 | Global zero register | <int> | no | no | $g0 |
| G1 – G7 | Global registers | <int> | yes | yes | $g1 – $g7 |
| O0 – O5 | Outgoing parameter registers | <int> | yes | yes | $o0 – $o5 |
| SP | Stack pointer | <int> | yes | yes | $sp |
| O7 | Temporary register | <int> | yes | yes | $o7 |
| L0 – L7 | Local registers | <int> | yes | yes | $l0 – $l7 |
| I0 – I5 | Incoming parameter registers | <int> | yes | yes | $i0 – $i5 |
| FP | Frame pointer | <int> | yes | yes | $fp |
| I7 | Return address | <int> | yes | yes | $i7 |

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| PSR | Processor status register | <int> | yes | no | $psr |
| Y | Y register | <int> | yes | yes | $y |
| WIM | WIM register | <int> | no | no | |
| TBR | TBR register | <int> | no | no | |
| PC | Program counter | <code>[] | no | yes | $pc |
| nPC | Next program counter | <code>[] | no | yes | $npc |

## SPARC PSR Register

For your convenience, TotalView interprets the bit settings of the SPARC PSR register. You can edit the value of the PSR and set some of the bits outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| ET | 0x00000020 | Traps enabled |
| PS | 0x00000040 | Previous supervisor |
| S | 0x00000080 | Supervisor mode |
| EF | 0x00001000 | Floating-point unit enabled |
| EC | 0x00002000 | Coprocessor enabled |
| C | 0x00100000 | Carry condition code |
| V | 0x00200000 | Overflow condition code |
| Z | 0x00400000 | Zero condition code |
| N | 0x00800000 | Negative condition code |

## SPARC Floating-Point Registers

TotalView displays the SPARC floating-point registers in the Stack Frame Pane of the Process Window. The next table describes how TotalView treats each floating-point register, and the actions you can take with each register.

| Register | Description | Data Type | Edit | Dive | Specify in Expression |
|---|---|---|---|---|---|
| F0, F1, F0_F1 | Floating-point registers (*f* registers), used singly | <float> | no | yes | $f0, $f1, $f0_f1 |
| F2 – F31 | Floating-point registers (*f* registers), used singly | <float> | yes | yes | $f2– $f31 |
| F0, F1, F0_F1 | Floating-point registers (*f* registers), used as pairs | <double> | no | yes | $f0, $f1, $f0_f1 |
| F0/F1 – F30/F31 | Floating-point registers (*f* registers), used as pairs | <double> | yes | yes | $2 – $f30_f31 |
| FPCR | Floating-point control register | <int> | no | no | $fpcr |
| FPSR | Floating-point status register | <int> | yes | no | $fpsr |

TotalView allows you to use these registers singly or in pairs, depending on how they are used by your program. For example, if you use F1 by itself, its type is **<float>**, but if you use the F0/F1 pair, its type is **<double>**.

## SPARC FPSR Register

For your convenience, TotalView interprets the bit settings of the SPARC FPSR register. You can edit the value of the FPSR and set it to any of the bit settings outlined in the following table.

| Value | Bit Setting | Meaning |
|---|---|---|
| CEXC=NX | 0x00000001 | Current inexact exception |
| CEXC=DZ | 0x00000002 | Current divide by zero exception |
| CEXC=UF | 0x00000004 | Current underflow exception |
| CEXC=OF | 0x00000008 | Current overflow exception |
| CEXC=NV | 0x00000010 | Current invalid exception |
| AEXC=NX | 0x00000020 | Accrued inexact exception |
| AEXC=DZ | 0x00000040 | Accrued divide by zero exception |
| AEXC=UF | 0x00000080 | Accrued underflow exception |
| AEXC=OF | 0x00000100 | Accrued overflow exception |
| AEXC=NV | 0x00000200 | Accrued invalid exception |
| EQ | 0x00000000 | Floating-point condition = |
| LT | 0x00000400 | Floating-point condition < |
| GT | 0x00000800 | Floating-point condition > |
| UN | 0x00000c00 | Floating-point condition unordered |
| QNE | 0x00002000 | Queue not empty |
| NONE | 0x00000000 | Floating-point trap type None |
| IEEE | 0x00004000 | Floating-point trap type IEEE Exception |
| UFIN | 0x00008000 | Floating-point trap type Unfinished FPop |
| UIMP | 0x0000c000 | Floating-point trap type Unimplemented FPop |
| SEQE | 0x00010000 | Floating-point trap type Sequence Error |
| NS | 0x00400000 | Nonstandard floating-point FAST mode |
| TEM=NX | 0x00800000 | Trap enable mask – Inexact Trap Mask |
| TEM=DZ | 0x01000000 | Trap enable mask – Divide by Zero Trap Mask |
| TEM=UF | 0x02000000 | Trap enable mask – Underflow Trap Mask |
| TEM=OF | 0x04000000 | Trap enable mask – Overflow Trap Mask |
| TEM=NV | 0x08000000 | Trap enable mask – Invalid Operation Trap Mask |
| EXT | 0x00000000 | Extended rounding precision – Extended precision |
| SGL | 0x10000000 | Extended rounding precision – Single precision |
| DBL | 0x20000000 | Extended rounding precision – Double precision |
| NEAR | 0x00000000 | Rounding direction – Round to nearest (tie-even) |
| ZERO | 0x40000000 | Rounding direction – Round to 0 |
| PINF | 0x80000000 | Rounding direction – Round to +Infinity |
| NINF | 0xc0000000 | Rounding direction – Round to –Infinity |

### Using the SPARC FPSR Register

The SPARC processor does not catch floating-point errors by default. You can change the value of the FPSR within TotalView to customize the exception handling for your program.

For example, if your program inadvertently divides by zero, you can edit the bit setting of the FPSR register in the Stack Frame Pane. In this case, you would change the bit setting for the FPSR to include **0x01000000** (as shown in Table 35) so that TotalView traps the "divide by zero" bit. The string displayed next to the FPSR register should now include **TEM=(DZ)**. Now, when your program divides by zero, it receives a **SIGFPE** signal, which you can catch with TotalView. See "H*andling Signals*" in Chapter 3 of the *TotalView Users Guide* for more information. If you did not set the bit for trapping divide by zero, the processor would ignore the error and set the **AEXC=(DZ)** bit.

# Index

## Symbols


# scoping separator character 25, 29, 63
$newval variable in watchpoints 102
$oldval variable in watchpoints 102
$stop built-in function 75
%B server launch replacement character 214
%C server launch replacement character 214
%D path name replacement character 215
%H hostname replacement character 215
%L host and port replacement character 215
%N line number replacement character 215
%P password replacement character 215
%S source file replacement character 215
%t1 file replacement character 215
%t2 file replacement character 215
%V verbosity setting replacement character 216
.totalview/lib_cache subdirectory 32
.tvd files 138
/proc file system 230
= symbol for PC of current buried stack frame 64
> symbol for PC 64
@ symbol for action point 64


## A


–a option to totalview command 203
ac, *see* dactions command
acquiring processes 174
Action Point > Save All command 167
action point identifiers 19, 44
action points
  default for newly created 162
  deleting 37, 119, 129, 131, 153
  disabling 19, 39, 39
  displaying 19
  enabling 19
  identifiers 19
  information about 19
  loading 19
  loading automatically 206
  loading saved information 19
  reenabling 44
  saving 19
  saving information about 19
  scope of what is stopped 163
  sharing 162
  stopping when reached 183
actionpoint command 119
actionpoint properties 119
actions, *see* dactions command
activating type transformations 198
adding group members 54
adding groups 53
address 139
address property 119
addressing_callback 155
advancing by steps 91
after_checkpointing options 34
aggregate data 191
AIX
  compiling on 220
  linking C++ to dbfork library 225
  linking to dbfork library 225
  swap space 232
alias command 16
aliases
  default 16
  removing 115
Alpha
  architecture 243
  floating-point registers 244
  FPCR register 244
  general registers 243
append, *see* dlappend command
appending to CLI variable lists 62
architectures 163
  Alpha 243
  HP PA-RISC 245
  Intel IA-64 251
  Intel-x86 239, 254
  MIPS 258
  PowerPC 247
  SPARC 262
arenas 48, 71
ARGS variable 159
ARGS_DEFAULT variable 159

arguments
command line 86
default 159
for totalview command 203
for tvdsvr command 212
arrays
automatic dereferencing 165
number of elements displayed 164
arriving at barrier 26
as, *see* dassign command
ask on dlopen option 236
ask_on_dlopen option 236
ask_on_dlopen variable 164
assemble, displaying symbolically 174
assembler instructions, stepping 94
assign, *see* dassign command
assigning string values 21
assigning values 21
asynchronous execution 45
at, *see* dattach command
attach, *see* dattach command
attaching to parallel processes 23
attaching to processes 23
attaching, using PIDs 23
auto_array_cast_bounds variable 164
auto_array_cast_enabled variable 165
auto_deref_in_all_c variable 165
auto_deref_in_all_fortran variable 165
auto_deref_initial_c variable 165
auto_deref_initial_fortran variable 166
auto_deref_nested_c variables 166
auto_deref_nested_fortran variables 166
auto_load_breakpoints variables 166
auto_read_symbol_at_stop variable 167
auto_save_breakpoints variable 167
automatic dereferencing of arrays 165
automatically attaching to processes 179

## B

b, *see* dbreak command
ba, *see* dbarrier command
–background option 204
back-tick analogy 18
barrier breakpoint 26
barrier is satisfied 160, 168
barrier, *see* dbarrier command
BARRIER_STOP_ALL variable 25, 27, 159
barrier_stop_all variables 167
BARRIER_STOP_WHEN_DONE variable 25, 160
barrier_stop_when_done variables 168
barriers 25, 26
arriving 26
creating 26
scope of what is stopped 159
what else is stopped 25
base_name 139
baud rate, specifying 213
baw, *see* dbarrier command
–bg option 204
–bkeepfile option 225
blocking command input 101
blocking input 101
break, *see* dbreak command
breakpoints
automatically loading 166
barrier 25
default file in which set 30
defined 29
popping Process Window 189
setting at functions 30
stopping all processes at 29
temporary 98
triggering 29
breakpoints file 20, 166, 167
bt, *see* dbreak command
build_struct_transform
defined 194
example 193
lists 194
members argument 194
name argument 194
bulk launch 215
bulk_launch_base_timeout variables 168
bulk_launch_enabled variables 168
bulk_launch_incr_timeout variables 168
bulk_launch_string variables 168
bulk_launch_tmpfile1_header_ line variables 169
bulk_launch_tmpfile1_host_ lines variables 169
bulk_launch_tmpfile1_trailer_ line variables 169
bulk_launch_tmpfile2_header_line variables 169
bulk_launch_tmpfile2_host_ lines variables 169
bulk_launch_tmpfile2_trailer_ line variables 169
buried stack frame 63
by_language_rules 136
by_path 136
by_type_index 136

## C

C language escape characters 21
C shell 231
C++
demangler 204
including libdbfork.h 225
C++ demangler 171
C++ STL instantiation 192
c_type_strings variables 169
cache, flushing 32
cache, *see* dcache command
call stack 100
displaying 108
call tree saved position 187
–callback option 211, 212
–callback_host 212
–callback_ports 212
callbacks 177
after loading a program 180
when opening the CLI 179
capture command 18, 112
case sensitive searching 181
Cast dereferenced C pointers to array string checkbox 165
cast subcommand 136

CGROUP variable 160
changing CLI variables 88
changing dynamic context 100
changing focus 48
changing value of program variable 21, 34, 55, 60, 73, 85, 96, 98
chase_mouse variables 185
checkpoint, *see* dcheck-point command
checkpointing
  preserving IDs 33
  process state 33
  reattaching to parallel 33
  restarting 84
  scope 33
classes, transforming 194
CLI
  sourcing files 193
  startup file 194
CLI commands
  action points 15
  alias 16
  capture 18, 112
  dactions 19
  dassign 21
  dattach 23
  dbarrier 25
  dbreak 29
  dcache 32
  dcheckpoint 4, 33
  dcont 36
  ddelete 37
  ddetach 38
  ddisable 39
  ddlopen 40
  ddown 43
  dec2hex 121
  denable 44
  dflush 45, 75
  dfocus 48
  dga 50
  dgo 52
  dgroups 53
  dhalt 58
  dhold 60
  dkill 61
  dlappend 62
  dlist 63
  dlist command 162
  dload 66
  dmstat 67
  dnext 69
  dnexti 71
  dout 73
  dprint 75
  dptsets 79
  drerun 82
  drestart 8, 84
  drun 61, 86
  drun, reissuing 87
  dset 88
  dstatus 90
  dstep 91
  dstepi 94
  dunhold 96
  dunset 97
  duntil 98
  dup 100
  dwait 101
  dwatch 102
  dwhat 105
  dwhere 108
  dworker 110
  environment 13
  executing immediately 205
  execution control 14
  exit 111
  help 112
  initialization 13
  overview 13, 117
  program information 14
  quit 113
  responding to 135
  stty 114
  summary 3
  termination 13
  TV::actionpoint 119
  TV::dll command 41, 122
  TV::errorCodes 123
  TV::expr 75, 124
  TV::focus_groups 126
  TV::focus_processes 127
  TV::focus_threads 128
  TV::group 129
  TV::hex2dec 130
  TV::process 131
  TV::read_symbols command 134
  TV::respond 135
  TV::scope 136
  TV::source_process_startup 138
  TV::symbol 139
  TV::thread 151
  TV::type 153
  TV::type_transformation 155
  unalias 115
CLI variables
  ARGS 159
  ARGS_DEFAULT 159
  ask_on_dlopen 164
  auto_array_cast_bounds 164
  auto_array_cast_enabled 165
  auto_deref_in_all_c 165
  auto_deref_in_all_fortran 165
  auto_deref_initial_fortran 166
  auto_deref_intial_c 165
  auto_deref_nested_c 166
  auto_deref_nested_fortran 166
  auto_load_breakpoints 166
  auto_read_symbol_at_stop 167
  auto_save_breakpoints 167
  BARRIER_STOP_ALL 25, 27, 159
  barrier_stop_all 167
  BARRIER_STOP_WHEN_ DONE 25
  BARRIER_STOP_WHEN_DONE 160
  barrier_stop_when_done 168
  bulk_launch_base_timeout 168
  bulk_launch_enabled 168
  bulk_launch_incr_timeout 168
  bulk_launch_string 168
  bulk_launch_tmpfile1_header_line 169
  bulk_launch_tmpfile1_host_ lines 169
  bulk_launch_tmpfile1_trailer_ line 169
  bulk_launch_tmpfile2_header_ line 169
  bulk_launch_tmpfile2_host_ lines 169
  bulk_launch_tmpfile2_trailer_ line 169
  c_type_strings 169
  CGROUP 160
  changing 88
  chase_mouse 185
  comline_patch_area_base 169
  comline_path_area_length 170
  COMMAND_EDITING 160

command_editing 170
compile_expressions 170
compiler_vars 170
copyright_string 171
current_cplus_ demangler 171
current_fortran_ demangler 171
data_format_double 172
data_format_ext 173
data_format_int16 173
data_format_int32 173
data_format_int64 173
data_format_int8 173
data_format_single 173
data_format_singlen 174
dbfork 174
default value for 88
deleting 88
display_assembler_ symbolically 174
display_font_dpi 185
dll_ignore_prefix 174
dll_read_all_symbols 174
dll_read_loader_ symbols_only 174
dll_read_no_symbols 175
dll_stop_suffix 175
dpvm 175
dump_core 176
dynamic 176
editor_launch_string 176
enabled 185
errorCodes 75
EXECUTABLE_PATH 24, 64, 161
fixed_font 186
fixed_font_family 186
fixed_font_size 186
font 186
force_default_cplus_demangler 176
force_default_f9x_demangler 176
force_window_position 186
geometry_call_tree 187
geometry_cli 187
geometry_globals 187
geometry_help 187
geometry_memory_stats 187
geometry_message_queue 188
geometry_message_queue_graph 188
geometry_modules 188
geometry_process 188
geometry_ptset 188
geometry_pvm 188
geometry_root 188
geometry_thread_objects 189
geometry_variable 189
geometry_variable_stats 189
global_typenames 177
GROUP 161
GROUPS 23, 66, 161
ignore_control_c 177
image_load_callbacks 177
in_setup 177
kcc_classes 177
keep_search_dialog 189
kernel_launch_string 178
library_cache_directory 178
LINES_PER_SCREEN 161
local_interface 178
local_server 178
local_server_launch_string 178
MAX_LIST 63, 162
message_queue 179
parallel 179
parallel_attach 179
parallel_stop 180
platform 180
pop_at_breakpoint 189
pop_on_error 189
process_load_callbacks 180
PROMPT 162
PTSET 162
pvm 180
save_window_pipe_or_ filename 181
search_case_sensitive 181
server_launch_enabled 181
server_launch_string 181
server_launch_timeout 181
SGROUP 162
SHARE_ACTION_POINT 162
share_action_point 181
signal_handling_mode 182
single_click_dive_enabled 189
source_pane_tab_width 183
spell_correction 183
STOP_ALL 29, 163
stop_all 183
stop_relatives_on_proc_error 183
suffix 183
TAB_WIDTH 63, 163
THREADS 163
TOTAL_VERSION 163
TOTALVIEW_ROOT_PATH 163
TOTALVIEW_TCLLIB_PATH 163
ttf 184
ui_font 190
ui_font_family 190
ui_font_size 190
user_threads 184
using_color 190
using_text_color 190
using_title_color 190
VERBOSE 164
version 184, 190
viewing 88
visualizer_launch_enabled 184
visualizer_launch_string 184
visualizer_max_rank 184
warn_step_throw 184
WGROUP 164
wrap_on_search 185
CLI, activated from GUI flag 185
closes shared libraries 122
clusterid property 131
co, *see* dcont command
code, displaying 63
color
foreground 205
comline_patch_area_base variables 169
comline_path_area_length variables 170
command
Tools > Dynamic Libraries 40
command arguments 159
command focus 48

command input, blocking 101
command line arguments 86
command output 18
command prompt 162
command summary 3
COMMAND_EDITING variable 160
command_editing variables 170
commands
  totalview 203
  tvdsvr
    syntax and use 211
  user-defined 16
commands verb
  actionpoint command 119, 122
  expr command 124
  group command 129
  process command 131
  thread command 151
  type command 153
commands, responding to 135
compile_expressions variables 170
compiler property 156
–compiler_vars option 204
compiler_vars variables 170
compilers, KCC 177
compiling
  debugging symbols 219
  –g compiler option 219
  on HP Tru64 UNIX 219, 220
  on HP-UX 220, 221
  on IRIX 222
  on SunOS 223
  options 219
compiling on Itanium 222
conditional watchpoints 102
connection directory 215
console output for tvdsvr 212
console output redirection 204
cont, *see* dcont command
continuation_sig property 151
control group variable 160
control group, stopping 183
control list element 161
copyright_string variables 171
core
  dumping for TotalView 205
  when needing to debug TotalView itself 176
core files, loading 23
count property 129
create subcommand 155
creating a group 53, 55
creating barrier breakpoints 26
creating commands 16
creating new process objects 66
creating threads 52
creating type transformations 191
Ctrl+C, ignoring 177
Ctrl+D to exit CLI 111, 113
current data size limit 231
current frame marker register
  Intel IA-64 253
current list location 43
current_cplus_demangler variables 171
current_fortran_demangler variables 171


## D


d, *see* ddown command
d_process object 230
dactions command 19
dassign command 21
data format, presentation styles 172
data size 67
data size limit in C shell 231
data_format_double variables 172
data_format_ext variables 173
data_format_int16 variables 173
data_format_int32 variables 173
data_format_int64 variables 173
data_format_int8 variables 173
data_format_single variables 173
data_format_stringlen variables 174
datatype incompatibilities 21
dattach command 23
dbarrier command 25
dbfork library
  linking with 224
  syntax 204
–dbfork option 204
dbfork variables 174
dbreak command 29
dcache command 32
dcheckpoint command 4, 33
  preserving IDs 33
  process 33
  reattaching to parallel 33
  scope 33
dcont command 36
ddelete command 37
ddetach command 38
ddisable command 39
ddl_read_all_symbols variable 174
ddlopen command 40
ddown command 43
de, *see* ddelete command
deactivating action points 39
deadlocks at barriers 26
–debug_file option 204, 212
debugger server 181, 211
debugging remote systems 32
debugging session, ending 111
dec2hex command 121
default aliases 16
default arguments 86, 159
  modifying 87
default focus 48
default value of variables, restoring 97
deferred reading, shared library symbols 134
defining the current focus 162
delay slot instructions for MIPS 261
delete verb, expr command 124
delete, *see* ddelete command
deleting action points 37, 119, 129, 131, 153
deleting cache 32
deleting CLI variables 88
deleting groups 53, 54
deleting variables 97
demangler
  C++ 171
  forcing use 176
  Fortran 171
  overriding 204, 206

–demangler option 204
denable command 44
dereferencing
C pointers automatically 165
C structure pointers automatically 166
Fortran pointers automatically 166
values automatically 165
dereferencing values automatically 165
det, *see* ddetach command
detach, *see* ddetach command
detaching from processes 38
dflush command 45, 75
dfocus command 48
dga command 50
dgo command 52
dgroups command 53
–add 54
–delete 54
–intersect 54
–list 55
–new 55
–remove 55
dhalt command 58
dhold command 60
di, *see* ddisable command
directory search paths 161
disable, *see* ddisable command
disabling action points 19, 39
disabling PVM support 207
display call stack 108
–display option 205
display_assembler_ symbolically variables 174
display_font_dpi variables 185
displaying
code 63
current execution location 108
error message information 164
help information 112
information on a name 105
lines 162
values 75
displaying expressions 75
diving, single click 189
dkill command 61
dlappend command 62
dlist command 63, 162
dlist, number of lines displayed 162
dll command 122
DLL Do Query on Load list 236
DLL Don't Query on Load list 236
dll_ignore_prefix variables 174
dll_read_loader_symbols_ only 174
dll_read_no_symbols variables 175
dll_stop_suffix variables 175
dload command 66
dlopen 40, 235
ask when loading 164
dmstat command 67
dnext command 69
dnexti command 71
done property 124
double-precision data format 172
dout command 73
down, *see* ddown command
dpid 160
dpid property 151
dprint command 75
dptsets command 79
–dpvm option 205, 212
dpvm variables 175
drerun command 82
drestart command 8, 84
attaching automatically 84
attaching to processes 84
process state 84
drun command 61, 86
poe issues 87
reissuing 87
dset command 88
dstatus command 90
dstep command 91
iterating over focus 91
dstepi command 94
duhtp, *see* dunhold command
duid property 131, 151
dump subcommand 136, 139
–dump_core option 205
dump_core variables 176
dunhold command 96
dunset command 97
duntil command 98
group operations 98
dup command 100
dwait command 101
dwatch command 102
dwhat command 105
dwhere command 108
levels 162
dworker command 110
dynamic library support limitations 237
dynamic variables 176
dynamically loaded libraries 235

## E

editor_launch_string variables 176
eliminating tab processing 63
en, *see* denable command
enable, *see* denable command
enabled property 119
enabled variables 185
enabling action points 19, 44
enabling PVM support 207
ending debugging session 111
enum_values property 153
environment variables
LD_LIBRARY_PATH 224, 225, 226, 227
error message information 164
error state 164
errorCodes command 75, 123
errorCodes variable 123
errors, raising 123
escape characters 21
evaluating functions 75
evaluation points, *see* dbreak
evaluations, suspended, flushing 45
exception data on HP Tru64 223
exception subcodes 75
exception, warning when thrown 184
executable property 131
EXECUTABLE_PATH variable 24, 64, 161
executing as one instruction 71
executing as one statement 69
executing assembler instructions 94
executing source lines 91
execution

halting 58
resuming 36
execution location, displaying 108
execve() 224
calling 204
catching 174
exit command 111
expr command 75, 124
expression property 119, 124
expression system
AIX 238
Alpha 237
IRIX 238
expression values, printing 75
expressions, compiling 170
expressions, type transformation 195
extensions for file names 183


## F


f, *see* dfocus command
fatal errors 231
–fg option 205
figures
Vector Transformation 192
File > Preferences command 198
file name extensions 183
files
initialization 194
files, libdbfork.h 225
fixed_font variables 186
fixed_font_family variables 186
fixed_font_size variables 186
floating point data format
double-precision 172
extended floating point 173
single-precision 173
SPARC 247
floating point registers
Intel IA-64
Intel IA-64
floating point registers 253
floating point status register
Intel IA-64 254
flush, *see* dflush command
flushing cache 32
flushing suspended evaluations 45
focus
*see also* dfocus command
default 48
defining 162
focus_groups command 126
focus_processes command 127
focus_threads command 128
focus_threads property 124
font variables 186
fonts 185
fixed 186
ui 186, 190
ui font family 190
ui font size 190
force_default_cplus_ demangler variables 176
force_default_f9x_ demangler variables 176
force_window_position variables 186
–foreground option 205
fork() 224
calling 204
catching 174
Fortran demangler 171
functions
evaluating 75
setting breakpoints at 30


## G


g, *see* dgo command
general registers
Intel IA-64 251
geometry_call_tree variables 187
geometry_cli position 187
geometry_cli variables 187
geometry_globals variables 187
geometry_help variables 187
geometry_memory_stats variables 187
geometry_message_queue variables 188
geometry_message_queue_ graph variables 188
geometry_modules variables 188
geometry_process variables 188
geometry_ptset variables 188
geometry_pvm variables 188
geometry_root variables 188
geometry_thread_objects variables 189
geometry_variable variables 189
geometry_variable_stats variables 189
get subcommand 136
get verb
actionpoint command 119, 122
expr command 124
group command 129
process command 131
thread command 151
type command 153
Global Arrays 50
setting language for display 50
global_typenames variables 177
–global_types option 206
GNU C++ STL instantiation 192
go, *see* dgo command
goal breakpoint 92
gr, *see* dgroups command
group command 129
group members, stopping flag 163
group of interest 92
GROUP variable 161
group width stepping behavior 91
groups
accessing properties 129
adding 53
adding members 54
creating 53, 55
deleting 53, 54
intersecting 53, 54
listing 53, 55
naming 54
placing processes in 24
removing 55
removing members 53
returning list of 126
setting properties 129
GROUPS variable 23, 66, 161
groups, *see* dgroups command


## H


h, *see* dhalt command
halt, *see* dhalt command

halting execution 58
handling signals 208
handling user-level (M:N) thread packages 184
heap size 67
heap_size property 131
held property 131, 151
help command 112
help window position 187
hex2dec command 130
hexadecimal conversion 121
hold, *see* dhold command
holding processes 60
holding threads 26, 60
host ports 212
hostname
  expansion 215
  for tvdsvr 212
  replacement 215
hostname property 131
HP Tru64 UNIX
  /proc file system 230
  linking to dbfork library 224
  swap space 231
hp, *see* dhold command
HP-UX
  architecture 245
  shared libraries 235
  swap space 231
ht, *see* dhold command
htp, *see* dhold command

## I

I/O redirection 86
id property 119, 124, 129, 131, 151, 153, 156
ignore_control_c variables 177
ignoring libraries by prefix 205
image browser window position 187
image_id property 153
image_ids property 131
image_load_callbacks variables 177
in_setup variables 177
inet interface name 178
info state 164
information on a name 105
initialization file 115, 194
initially_suspended_process property 124
input, blocking 101
inserting working threads 110
instructions, stepping 94
integer (64-bit) data format 173
integer data format
  32-bit 173
  8-bit 173
integer data formats
  16-bit 173
Intel IA-64
  current frame marker register 253
  floating point status register 254
  general registers 251
  previous function state register 253
  processor status register 252
  register stack configuration register 253
Intel IA-64 architecture 251
Intel-x86
  architecture 239, 254
  floating-point registers 240, 255
  FPCR register 241, 256
    using 242, 257
  FPSR register 242, 257
  general registers 240, 255
interface name for server 178
intersecting groups 53, 54
IRIX
  /proc file system 230
  linking to dbfork library 226
  swap space 232

## J

job_t::launch 230

## K

k, *see* dkill command
–kcc_classes option 206
kcc_classes variables 177
keep_search_dialog variables 189
kernel_launch_string variables 178
keys, remapping 237
keysym 237
kill, *see* dkill command
killing processes 61

## L

l, *see* dlist command
language property 119, 153, 156
lappend, *see* dlappend command
launch string
  for editor 176
  for server (Sun only) 178
  for Visualizer 184
Launch Strings page 184
launching
  local server 178
  processes 86
  single process sever launch string 181
  tvdsvr 211
  Visualizer 184
–lb option 206
length property 119, 153
levels for dwhere 162
levels, moving down 43
libdbfork.a 224
libdbfork.h file 225
libraries
  dbfork 204
  ignoring by prefix 205
  loading by suffix 175
  loading symbols from 176
  not loading based on prefix 174
  shared 233
library cache, flushing 32
library_cache_directory variables 178
line property 119
line_number 139
LINES_PER_SCREEN variable 161
linking to dbfork library 224
  AIX 225
  C++ and dbfork 225
  HP Tru64 UNIX 224
  IRIX 226
  SunOS 5 226
Linux swap space 232
list location 43
list, *see* dlist command
list_element_count_addressing_callback 156
list_element_data_addressing_callback 156
list_element_next_addressing_callback 156
list_element_prev_addressing_callback 156
list_end_value property 157
list_first_element_addressing_callback 157
list_head_addressing_callback 157
listing groups 53, 55
  using a regular expression 55

listing lines 162
lo, *see* dload command
load and loadbind 235
load, *see* dload command
loader_name 139
loading
  action points 19, 206
  programs 66
  symbols from shared libraries 176
  tvd files 138
loading action point information 19
loading libraries 174, 175
loading shared libraries 122
local_interface variables 178
local_server variables 178
local_server_launch_string variables 178
lockstep list element 161
logical model 192
lookup subcommand 136
lookup_keys subcommand 136
lower_bounds_callback 157

## M

machine instructions, stepping 94
manager property 151
manager threads, running 91
managing shared libraries 122
mangler, overriding 204, 206
MAX_LIST variable 63, 162
maxdsiz_64 232
maximum data segment size 232
Maximum permissible rank field 184
member_type property 129
member_type_values property 129
members argument, build_struct_transform 194
members property 129
memory
  data size 67
  heap 67
  stack 67
  text size 67
memory statistics window position 187
memory use 67
message queue graph window position 188
message queue window position 188
message verbosity variable 164
–message_queue option 206
message_queue variables 179
MIPS
  architecture 258
  delay slot instructions 261
  FCSR register 260
    using 261
  floating-point registers 260
  general registers 258
  SR register 259
mkswap command 232
modules window position 188
more processing 75
more prompt 112, 161
mounting /proc file system 230
–mqd option 206
multiprocess programs, attaching to processes 24

## N

n, *see* dnext command
name argument, build_struct_transform 194
name property 153, 157
name, information about 105
namespaces 88
  TV:: 88
  TV::GUI:: 88
  using wildcards 88
Namespaces, Symbol 147
naming the host 212
nested subroutines, stepping out of 73
new groups 55
newval variable in watchpoints 102
next, *see* dnext command
nexti, *see* dnexti command
ni, *see* dnexti command
nil, *see* dnexti command
niw, *see* dnexti command
nl, *see* dnext command
–nlb option 206
–no_ask_on_dlopen option 236
–no_compiler_vars option 204
–no_dbfork option 204
–no_dpvm option 205
–no_dump_core option 205
–no_dynamic option 234
–no_global_types option 206
–no_kcc_classes option 206
–no_message_queue option 206
–no_mqd option 207
–no_parallel option 207
–no_pvm option 207
–no_user_threads option 209
nodeid property 132
nw, *see* dnext command

## O

oldval variable in watchpoints 102
Open (or raise) process window at breakpoint checkbox 189
Open process window on error signal check box 189
opening shared libraries 40
options
  tvdsvr
    –callback 211
    –serial 211
    –server 211
    –set_pw 212
  –user_threads 209
ou, *see* dout command
oul, *see* dout command
out, *see* dout command
ouw, *see* dout command

## P

p, *see* dprint command
p/t expressions 79
p/t set browser position 188
panes, width 183
–parallel option 207
parallel processes, attaching to 23
parallel runtime libraries 179
parallel variables 179
Parallel Virtual Machine 175, 180, 205
parallel_attach variables 179
parallel_stop variables 180
password checking 214

passwords 213, 214
generated by tvdsvr 211
–patch_area_base option 207
–patch_area_length option 207
PATH environment variable for tvdsvr 211
pc property 151
Plant in share group checkbox 162, 181
platform variables 180
pop_at_breakpoint variables 189
pop_on_error variables 189
popping Process Window on error variable 189
port 4142 213
port number 212
for tvdsvr 212
replacement 215
searching 213
–port option 212
ports on host 212
post_scope 136
post_symbol 137
PowerPC
architecture 247
floating-point registers 249
FPSCR register 249
using the 250
FPSCR register, using 250
general registers 247
MSR register 248
pre_scope 136
pre_sym 136
preserving IDs in checkpoint 33
previous function state register
Intel IA-64 253
print, *see* dprint command
printing expression values 75
printing information about current state 90
printing registers 77
printing slices 76
printing variable values 75
proc file system problems 230
Process > Startup command 52
process barrier breakpoint, *see* barrier breakpoint
process command 131
process groups, *see* groups
process information, saving 34
process list element 161
process objects, creating new 66
process statistics 67
process width stepping behavior 92
process window position 188
process/thread sets
changing 48
process_load_callbacks variable 180
process_set checkpoint options 34
processes
attaching to 23, 66
automatically acquiring 174
automatically attaching to 179
current status 90
destroyed when exiting CLI 111, 113
detaching from 38
holding 60
killing 61
properties 131
releasing 96
releasing control 38
restarting 82, 86
returning list of 127
starting 82, 86
terminating 61
processor status register
Intel IA-64 252
program control groups, placing processes in 24
program stepping 91
program variable, changing value 21, 34, 55, 60, 73, 85, 96, 98
programs, loading 66
PROMPT variable 162
prompting when screen is full 75
properties
address 119
clusterid 131
continuation_sig 151
count 129
done 124
dpid 151
duid 131, 151
enabled 119
enum_values 153
executable 131
expression 119, 124
focus_threads 124
heap_size 131
held 131, 151
hostname 131
id 119, 124, 129, 131, 151, 153
image_id 153
image_ids 131
initially_suspended_process 124
language 119, 153
length 119, 153
line 119
manager 151
member_type 129
member_type_values 129
members 129
name 153
nodeid 132
pc 151
prototype 153
rank 153
result 125
satisfaction_group 119
share 119
sp 151
stack_size 132
stack_vm_size 132
state 132, 151
state_values 132, 151
status 125
stop_when_done 119
stop_when_hit 120
struct_fields 153
syspid 132
systid 151
text_size 132
threadcount 132
threads 132
type 129
type_values 120, 129
vm_size 132
properties verb
actionpoint command 119, 122
expr command 124
group command 129
process command 131
thread command 151
type command 153
Properties, Symbol 140
prototype property 153
PTSET variable 162
ptsets, *see* dptsets
PVM 213
–pvm option 207, 213
pvm variables 180

pvm window position 188
pxdb command 235
pxdb64 command 235

## Q

qualifying symbol names 63
quit command 113
quotation marks 21

## R

–r option 207
r, *see* drun command
raising errors 123
rank property 153
read_delayed subcommand 139
read_symbols command 134
reading action points file 19
reading symbols 134, 167, 174, 175
rebind subcommand 139
reenabling action points 44
register stack configuration register
  Intel IA-64 253
registers
  Alpha FPCR 244
  floating-point
    Alpha 244
    Intel-x86 240, 255
    MIPS 260
    PowerPC 249
    SPARC 263
  general
    Alpha 243
    Intel-x86 240, 255
    MIPS 258
    PowerPC 247
    SPARC 262
  Intel-x86 FPCR 241, 256
    using the 242, 257
  Intel-x86 FPSR 242, 257
  MIPS FCSR 260
    using the 261
  MIPS SR 259
  Power FPSCR 249
  Power MSR 248
  PowerPC FPSCR 249
    using 250
  PowerPC FPSCR, using 250
  PowerPC MSR 248
  printing 77
  SPARC FPSR 264
  SPARC FPSR, using 264
  SPARC PSR 263
registers, using in evaluations 30
regular expressions within name argument 194
release 160
releasing control 38
releasing processes and threads 25, 96
remapping keys 237
remote debugging, tvdsvr command syntax 211
–remote option 207
remote systems
  debugging 32
removing
  aliases 115
  group member 53
  groups 55
  variables 97
  worker threads 110
remsh command 214
replacement characters 214
replacing tabs with spaces 163
rerun, *see* rerun command
resolve_final subcommand 139
resolve_next subcommand 139
respond 135
restart, *see* drestart command
restarting processes 82, 86
restoring variables to default values 97
result property 125
resuming execution 29, 36, 52, 61
returning error information 123
root path 163
  of TotalView 163
Root Window position 188
routines, stepping out of 73
rr, *see* drerun command
rsh command, with tvdsvr 181
RTLD_GLOBAL 40
RTLD_LAZY 40
RTLD_LOCAL 40
RTLD_NOW 40
run, *see* drun command
running to an address 98

## S

s, *see* dstep command
satisfaction set 26, 160, 168
satisfaction_group property 119
save_window_pipe_or_filename variables 181
saved position
  Call Tree Window 187
  CLI Window 187
  Help Window 187
  Image Browser Window 187
  Memory Statistics Window 187
  Message Queue Graph Window 188
  Message Queue window 188
  Modules Window 188
  P/T Set Browser Window 188
  Process Window 188
  PVM Window 188
  Root Window 188
  Thread Objects Window 189
  Variable Window 189
saving action point information 19
saving action points 19
saving process information 34
scope 139
scope command 136
screen size 161
search dialog, remaining displayed 189
search paths 161
search_case_sensitive variables 181
–search_port option 213
searching
  case sensitive 181
  wrapping 185
serial line connection 213
–serial option 208, 211, 213
server launch command 214
–server option 211, 213
server_launch_enabled variables 181
server_launch_string variables 181
server_launch_timeout variables 181
servers, number of 215
set verb
  actionpoint command 119
  group command 129

process command 131
thread command 151
type command 153
set, *see* dset command
–set_pw option 212, 213
–set_pws option 214
setting lines between more prompts 161
setting terminal properties 114
SGROUP variable 162
share groups
share group variable 162
share list element 161
share property 119
SHARE_ACTION_POINT variable 162
share_action_point variables 181
share_in_group flag 162
shared libraries 233
closing 122
deferred reading 134
HP-UX 235
information about 122
managing 122
manually loading 40
reading deferred symbols 134
reading symbols 167, 174, 175
shared libraries, loading symbols from 176
–shm option 208, 209
showing current status 90
showing Fortran compiler variables 170
si, *see* dstepi command
SIGINT 177
–signal_handling_mode option 208
signal_handling_mode variable 182
–signal_handling_mode option 208
signals, handling in TotalView 208
sil, *see* dstepi command
SILENT state 164
single process server launch 181
single_click_dive_enabled variables 189
siw, *see* dstepi command
sl, *see* dstep command
slices, printing 76
source code, displaying 63
source_pane_tab_width variables 183
source_process_startup command 138
sourcing tvd files 138
sp property 151
SPARC
architecture 262
floating-point format 247
floating-point registers 263
FPSR register 264
using 264
general registers 262
PSR register 263
spell_correction variable 183
st, *see* dstatus command
stack frame 63
moving down through 43
stack memory 67
stack movements 100
stack, unwinding 45
stack_size property 132
stack_vm_size property 132
starting a process 82, 86
Startup command 52
startup file 194
start-up file, tvdinit.tvd 16
state property 132, 151
state_values property 132, 151
status property 125
status, *see* dstatus command
stderr redirection 86
stdin redirection 86
stdout redirection 86
step, *see* dstep command
stepi, *see* dstepi command
stepping
group width behavior 91
machine instructions 71, 94
process width behavior 92
*see* also dnext command, dnexti command, dstep command, and dstepi command
thread width behavior 92
warning when exception thrown 184
STL instantiation 192
stop group breakpoint 30
STOP_ALL variable 29, 159, 163
stop_all variable 183
stop_group flag 163
stop_relatives_on_proc_error variables 183
–stop_when_done command-line option 160
stop_when_done property 119
stop_when_hit property 120
stopped process, responding to resume commands 26
stopping execution 58
stopping group members flag 163
stopping the control group 183
string length format 174
strings, assigning values to 21
struct_fields property 153
structure definitions in KCC 177
structure transformations 193
structures, transforming 194
stty command 114
suffixes variable 183
SunOS 5
/proc file system 230
key remapping 237
linking to dbfork library 226
swap space 233
sw, *see* dstep command
swap command 233
swap space 231, 233
AIX 232
HP Tru64 231
HP-UX 231
IRIX 232
Linux 232
SunOS 233
swapon command 232
symbol command 139
symbol name qualification 63
Symbol Namespaces 147
Symbol Properties 140
symbols
reading 174, 175
symbols, interpreting 21
syspid property 132
system variables, *see* CLI variables

systid property 151

## T

tab processing 63
TAB_WIDTH variable 63, 163
tabs, replacing with spaces 163
target processes 58
  terminating 61
target property 154
terminal properties, setting 114
terminating debugging session 111
terminating processes 61
text size 67
text_size property 132
thread barrier breakpoint, *see* barrier breakpoint
thread command 151
thread groups, *see* groups
thread list element 161
thread objects window position 189
thread of interest 92, 98
thread width stepping behavior 92
threadcount property 132
threads
  barriers 27
  creating 52
  current status 90
  destroyed when exiting CLI 111, 113
  getting properties 151
  holding 26, 60
  list variable 163
  releasing 96
  returning list of 128
  setting properties 151
threads property 132
THREADS variable 163
Tools > Dynamic Libraries command 40
totalview command 203
  options 203
  synopsis 203
  syntax and use 203
TotalView Debugger Server 23, 34
TotalView executable 163
TotalView GUI version 190
TotalView version 184
totalview/lib_cache subdirectory 32
TOTALVIEW_ROOT_PATH variable 163
TOTALVIEW_TCLLIB_PATH command 198
TOTALVIEW_TCLLIB_PATH variable 163
TOTALVIEW_VERSION variable 163
Transformations, Using Type 198
Transformations, Why Type 191
transforming classes 194
transforming structures 193, 194
triggering breakpoints 29
troubleshooting xiii
ttf variable 184
TV:: namespace 88
TV::actionpoint command 119
TV::dll command 41, 122
TV::dll_read_loader_symbols_only variable 134
TV::dll_read_no_symbols variable 134
TV::errorCodes command 123
TV::expr command 75, 124
TV::focus_groups command 126
TV::focus_processes command 127
TV::focus_threads command 128
TV::group command 129
TV::GUI:: namespace 88
TV::hex2dec command 130
TV::process command 131
TV::read_symbols command 134
TV::respond command 135
TV::scope command 136
TV::source_process_startup command 138
TV::symbol command 139
TV::thread command 151
TV::ttf variable 199
TV::type command 153
TV::type_transformation command 155
tvd files 138
TVD.breakpoints file 20, 166, 167
tvdinit.tvd start-up file 16, 115
tvdsvr command 211, 212, 214
  description 211
  options 212
  password 211
  PATH environment variable 211
  synopsis 211
  use with DPVM applications 212
  use with PVM applications 213
tvdsvr.conf 213
TVDSVRLAUNCHCMD environment variable 214
type command 153
type names 177
type property 120, 129, 154
type transformation variable 184
type transformations
  creating 191
  expressions 195
  hiding 192
  preference 192
  regular expressions 194
  structures 193
type transformations, activating 198
Type Transformations, Using 198
Type Transformations, Why 191
type_callback 157
type_index 140
type_transformation command 155
type_transformation_description property 158
type_values property 120, 129, 154

## U

u, *see* dup command
uhp, *see* dunhold command
uht, *see* dunhold command
ui_font variables 190
ui_font_family variables 190
ui_font_size variables 190
un, *see* duntil command
unalias command 115
unconditional watchpoints 102
undefined symbols 40
unhold, *see* dunhold command
unl, *see* duntil command
unset, *see* dunset command
until, *see* duntil command
unw, *see* duntil command
unwinding the stack 45
up, *see* dup command
upper_bounds_callback 158
–user_threads option 209

user_threads variables 184
user-defined commands 16
user-level (M:N) thread packages 184
using quotation marks 21
Using Type Transformations 198
using_color variables 190
using_text_color variables 190
using_title_color variables 190

## V

validate_callback 158
value for newly created action points 162
values, printing 75
Variable Window position 189
variables
  assigning command output to 18
  changing values 21, 34, 55, 60, 73, 85, 96, 98
  default value for 88
  printing 75
  removing 97
  watched 103
  watching 102
Vector Transformation figure 192
VERBOSE variable 164
–verbosity option 209, 214
verbosity setting replacement character 216
version variables 184, 190
version, TotalView 163
vfork()
  calling 204
  catching 174
viewing CLI variables 88
visualizer_launch_enabled variables 184
visualizer_launch_string variables 184
visualizer_max_rank variables 184
vm_size property 132

## W

w, *see* dwhere command
wa, *see* dwatch command
wait, *see* dwait command
walk subcommand 136
warn_step_throw variables 184
warning state 164
watch, *see* dwatch command
watchpoints 102
  $newval 102
  $oldval 102
  conditional 102
  information not saved 20
  length of 103
  supported systems 102
WGROUP variable 164
wh, *see* dwhat command
what, *see* dwhat command
When barrier done, stop value 160
When barrier hit, stop value 159
where, *see* dwhere command
Why Type Transformations 191
window position, forcing 186
worker group list variable 164
worker threads 164
  inserting 110
  removing 110
worker, *see* dworker command
workers list element 161
–working_directory option 214
wot, *see* dworker command
wrap_on_search variables 185